

Content Manager

Software Version 24.4

Content Manager Governance and Compliance
SharePoint App: Installations Guide (Online)

opentext™

Document Release Date: January 2026
Software Release Date: January 2026

Legal notices

Copyright 2008-2026 Open Text

The only warranties for products and services of Open Text and its affiliates and licensors (“Open Text”) are as may be set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Open Text shall not be liable for technical or editorial errors or omissions contained herein. The information contained herein is subject to change without notice.

Adobe™ is a trademark of Adobe Systems Incorporated.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

This product includes an interface of the 'zlib' general purpose compression library, which is Copyright © 1995-2002 Jean-loup Gailly and Mark Adler.

Documentation updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To check for updated documentation, visit <https://www.microfocus.com/support-and-services/documentation/>.

Support

Visit the [MySupport portal](#) to access contact information and details about the products, services, and support that OpenText offers.

This portal also provides customer self-solve capabilities. It gives you a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the MySupport portal to:

- View information about all services that Support offers
- Submit and track service requests
- Contact customer support
- Search for knowledge documents of interest
- View software vulnerability alerts
- Enter into discussions with other software customers
- Download software patches
- Manage software licenses, downloads, and support contracts

Many areas of the portal require you to sign in. If you need an account, you can create one when prompted to sign in.

Contents

1 Introduction	6
1.1 Scope	6
1.2 Target Audience	6
2 Overview and Architecture	7
2.1 Understanding the product architecture	7
2.1.1 SharePoint apps	7
2.1.2 Content Manager Governance and Compliance app	9
2.1.3 Job processing	10
2.2 Implementation Scenarios	10
2.2.1 Single Architecture	11
App configuration storage	11
Workgroup servers	12
Determining the number of workgroup servers	14
2.2.2 Distributed architectures	14
Multiple SharePoint farms - collocated	14
Multiple SharePoint farms – distributed	15
3 Initial Setup and Installation	20
3.1 On Content Manager server	20
3.1.1 Server roles and features	20
3.1.2 AppFabric	21
3.1.3 Azure caching	21
3.1.4 SQL Server	21
3.1.5 SharePoint client components	22
3.1.6 Configure Content Manager	22
3.1.7 Render configuration wizard help	29
3.2 On SharePoint server	30
3.2.1 Prepare the corporate App catalog	30
Upgrade considerations	30
Retirement of Remote Event Receivers in SharePoint Online	30
Preservation and Hold Library Configuration	31
3.2.2 Identify the default site collection	31
3.2.3 SharePoint app creation using Powershell script to create Azure AD app	32
3.2.4 Creating Content Manager term sets	34
3.3 Identify and configure accounts	35
3.4 Determining the protocol and port	38
3.4.1 Choosing a protocol	38

- 3.4.2 Choosing a port 38
- 3.5 Installing the Content Manager components 38
 - 3.5.1 Configuring the use of HTTPS 39
 - 3.5.2 Additional steps for Windows Azure 40
 - 3.5.3 Authentication settings for SharePoint Online 41
- 4 Configuration 43
 - 4.1 Using Configuration Wizard 43
 - 4.2 Using Configuration Tool 66
 - 4.3 Additional Configuration 86
 - 4.3.1 Setting the default integration settings 86
 - 4.3.2 Setting up subsequent site collections 88
 - 4.3.3 Setting up One Drive for Business 88
 - 4.3.4 Supporting multiple SharePoint farms or multiple configuration databases 89
 - 4.3.5 Other configuration tasks 96
- 5 Upgrading 97
 - 5.1 Upgrading the Content Manager components 97
 - 5.1.1 Before you begin 97
 - 5.1.2 Performing the upgrade 97
 - 5.2 Upgrading the app configuration database 98
 - 5.3 Upgrading the Content Manager SharePoint configuration app 100
 - 5.4 Upgrading from SharePoint 2010 Integration Solution 103
- 6 Uninstalling the integration components 106
- Appendix 108
 - A: Performance planning 109
 - Working of Content Manager Governance and Compliance app 109
 - Implementation 112
 - Hardware calculations 113
 - B: General administration tasks 121
 - AppFabric Cache 121
 - Installing AppFabric 121
 - Configuring AppFabric 122
 - Joining a server to an existing cache cluster 126
 - Azure cache 128
 - Managed cache 128
 - Redis cache 130
 - HTTPS 131
 - Enabling HTTPS for a site 131
 - Disabling HTTP for a site 132
 - Port 133
 - Opening a port 133

- Determining ports in use by IIS 136
- Prepare record types 136
- C: SharePoint administration tasks 140
 - Identifying the app catalog in use 140
 - Creating an app catalog 141
 - Working with the term store 142
- D: Troubleshooting 145
 - General Troubleshooting 145
 - Scenario 1: Error while adding the app to a site 145
 - Scenario 2: Viewing the log file 146
 - Scenario 3: Turning on additional information 147
 - Scenario 4: Turning on success logging 148
 - Scenario 5: Job process fails to start 150
 - Scenario 6: Cannot open the configuration tool due to error 150
 - Scenario 7: HTTP Error 503 - the service is unavailable 151
 - Scenario 8: Configuration tool takes a long time to load 151
 - Scenario 9: Failed to create client context error on pages 151
 - Troubleshooting Workgroup servers 152
 - Scenario 1: Error - Unable to add server – https issue 152
 - Scenario 2: Error - Unable to add server – code access security issue 153
 - Troubleshooting App Catalog 154
 - Scenario 1: Apps are turned off error 154
 - Scenario 2: Can't add this app error 155
 - Scenario 3: Site hasn't been shared with you error 155
- E: Example PowerShell Scripts 157
 - SharePoint 157
 - Windows Azure 159
- F: Custom Claims Implementation 160
- G: Upgrading the Content Manager 8.3 Farm database 162

1 Introduction

1.1 Scope

This document details the installation, enablement, and upgrade procedures for all versions in 9.x stream of Content Manager Integration for SharePoint releases. For guidance on the administrative features and functions of the integration software, refer to the *Content Manager Integration for SharePoint User Guide*.

Consult the appropriate Content Manager or Microsoft documentation for details on Content Manager or Microsoft SharePoint Server.

NOTE: Refer to *Content Manager Specifications and Limitations* document for the MS SQL Server supported versions.

NOTE: This document describes the currently supported configurations and features, anything not listed must be assumed to imply it is not supported.

1.2 Target Audience

This document is for IT professionals responsible for installing, enabling, and upgrading the Content Manager Integration for SharePoint. You should be knowledgeable about:

- Content Manager administration
- Microsoft SharePoint Server farm administration


To perform the installation or upgrade of the integration software, you do not need to be knowledgeable about records or information management principles or about working with Content Manager or SharePoint user content.

The person configuring the integration will need to understand your organization's information management requirements.

2 Overview and Architecture

It is important to prepare your environment correctly for installation. Content Manager for SharePoint is an integration between Content Manager and Microsoft SharePoint. Both of these products are highly configurable with many optional components.

Preparing for the installation involves ensuring that any necessary configuration of these products has been performed prior to the installation occurring.

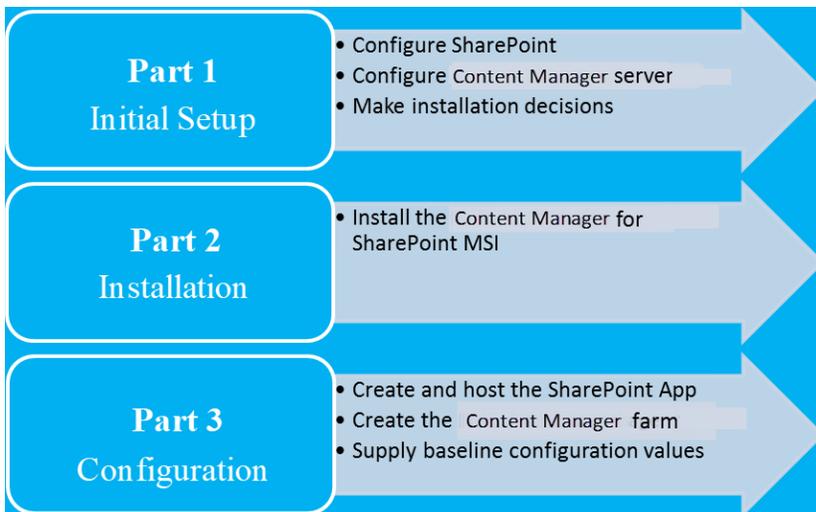

It is important that you follow the steps outlined in this document for each part of the process to ensure a successful implementation.

This section helps you understand and make some installation choices prior to commencing installation.


2.1 Understanding the product architecture

2.1.1 SharePoint apps

SharePoint 2013 introduced a new architecture for integrating/interacting with SharePoint. This architecture is known as the “App model”.

The concept of a SharePoint app is that using only a small footprint on the SharePoint farm, it is able to configure UI components such as ribbon buttons. The actual processing provided by an app is performed on an external server, not on the SharePoint server. This type of SharePoint app is known as a “provider hosted app”.


The SharePoint farm is a collection of servers that have sharepoint installed. There can be only one farm for each server.

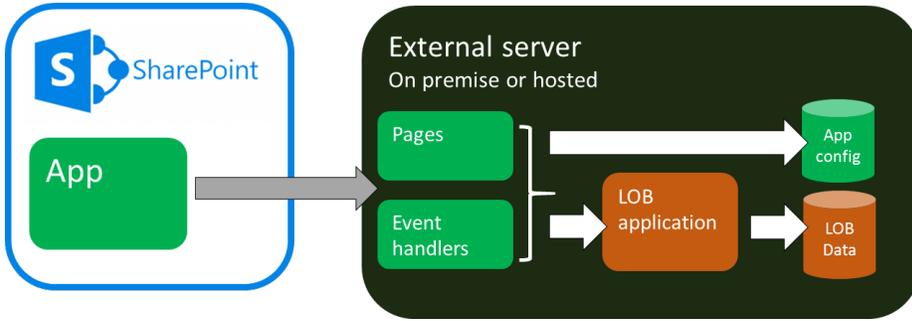


The external server typically provides:

- Any pages used by the app such as configuration pages
- A service for handling events raised by SharePoint that are relevant to the app
- Access to the line of business (LOB) application that the app is using
- Storage of LOB data
- Storage of app configuration data

SharePoint apps are hosted in catalogs to make them available for use on a SharePoint site or site collection. The Microsoft corporate store is the catalog of publicly available apps that are available for purchase and use. SharePoint includes a corporate catalog that allows the hosting of apps that are only available for use in your organization.

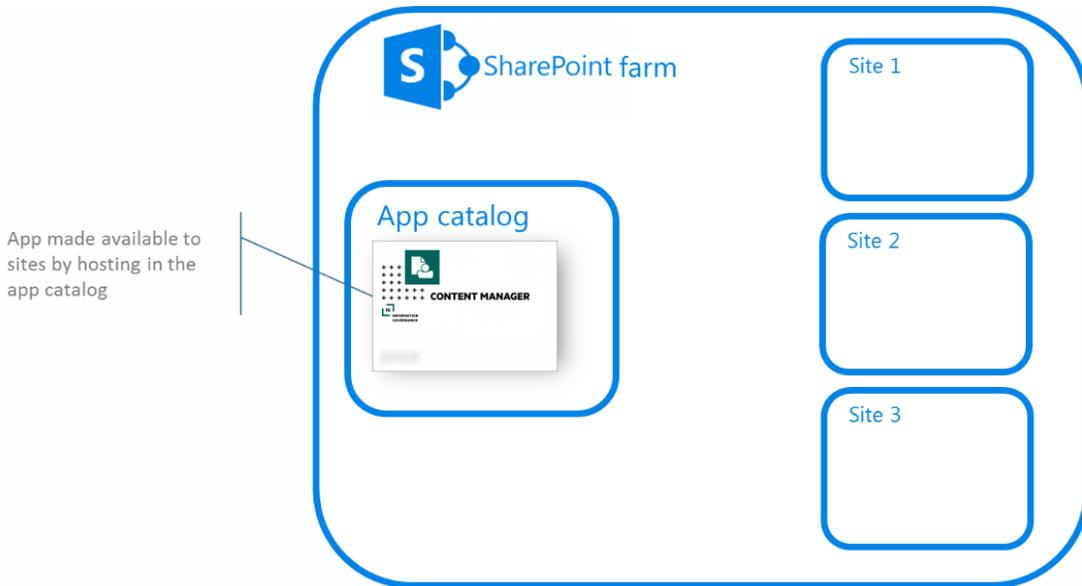


Once an app has been made available in the corporate catalog, it can be added to a site. It is at this point that the app functionality is available for use.

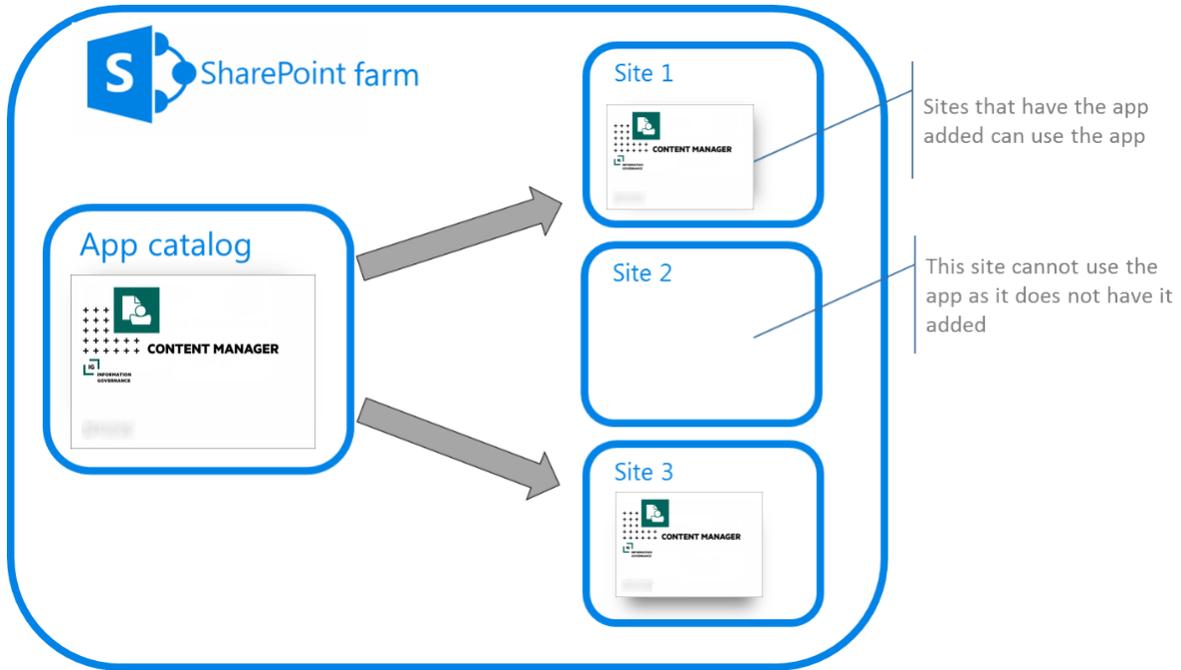

2.1.2 Content Manager Governance and Compliance app

Content Manager for SharePoint includes a SharePoint app. This app uses pages and event handlers that are installed on one or more Content Manager workgroup servers.

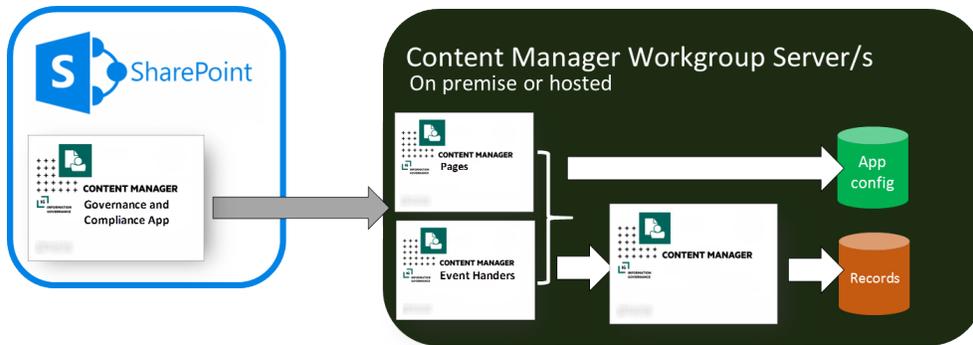

Equating this to the explanation of SharePoint apps, it is Content Manager that is the LOB application with the LOB data being the records it stores.

The app configuration data for the app is stored in a dedicated SQL Server database. Although illustrated as residing on the workgroup server, this database can be hosted on an external SQL Server.

Installation of these components can be summarized as:

- The pages and event handlers are installed on the Content Manager Workgroup Server by a dedicated MSI
- The app is uploaded to the SharePoint app catalog in use by the SharePoint farm
- The app is added to sites and site collections where it is required

Supports SharePoint Site User experience

The Content Manager Governance and Compliance for SharePoint app supports SharePoint Site User experience for Documents and Custom Lists in your site collection. A new template (**CMMModernUIGovernanceComplianceTemplate.app**) is available in the install directory to support SharePoint Site User experience.

If you are integrating Content Manager with SharePoint for the first time, during app configuration using the Wizard or Tool, you have the option to choose the SharePoint Site User experience (**Classic** or **Modern**). Based on your selection, respective template will be used to create the app.

If you want your existing integration to work with SharePoint Site User experience then, in the App configuration settings, modify the SharePoint Site User experience option to **Modern** using the Configuration Tool, configure the app and then publish it. Complete rest of the necessary steps by adding the app to your site collection.

To know whether you are using the right template for the experience you chose, check the app title once you have added it to your site collection. For classic experience, the app title will be **Content Manager Governance and Compliance app**. For SharePoint Site User experience, the app title will be **Content Manager Modern UI Governance and Compliance app**.

With the SharePoint Site User experience, Content Manager options will be available on the horizontal navigation bar of your site pages for Documents and Custom Lists. Except for the title of the app, the menu options and its functions are same as the classic experience.

2.1.3 Job processing

Management tasks are performed asynchronously by jobs. When a job is requested it is added to a job queue. The job queue resides in the app configuration database. Workgroup servers in the Content Manager farm retrieve jobs from the job queue and process them when the server has the capacity to complete the job.

The retrieval and execution of jobs from the queue is performed by a Windows service called the "Content Manager SharePoint Service".

Processing jobs from the queue in this manner provides the following benefits:

- **Failover:** if a server in the Content Manager farm becomes unavailable, other servers can process the jobs
- **Retry:** if a job fails, it will be retried
- **Restart:** should a workgroup server become unavailable after it has commenced processing a job, when the server becomes available again, the job will recommence from the point that it was at when the server went offline.
- **Throttling:** jobs are processed in a throttled manner to ensure that the server processing does not consume more resources than it has available.

2.2 Implementation Scenarios

The size of your SharePoint farm, the number of users and the types of activities that these users perform will all be determining factors when deciding how to configure the server topology for Content Manager.

2.2.1 Single Architecture

App configuration storage


The app configuration is stored in a SQL Server database. This therefore requires a SQL Server instance to be available. For information on SQL Server supported environment, see *Content Manager Specifications and Limitations* document.

NOTE: Express editions of these versions of SQL servers are suitable.

The following are the possible scenarios:

Scenario 1:

This is the simplest scenario where SQL server is hosted on the workgroup server.

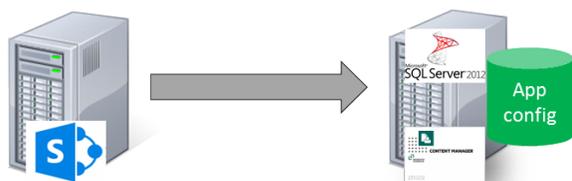


Scenario 2:

In this scenario, the app configuration database can be hosted on a separate dedicated SQL Server box.



Scenario 3:

In the scenario where multiple workgroup servers are used, only one instance of the app configuration database is required and will be shared by all workgroup servers in the farm.

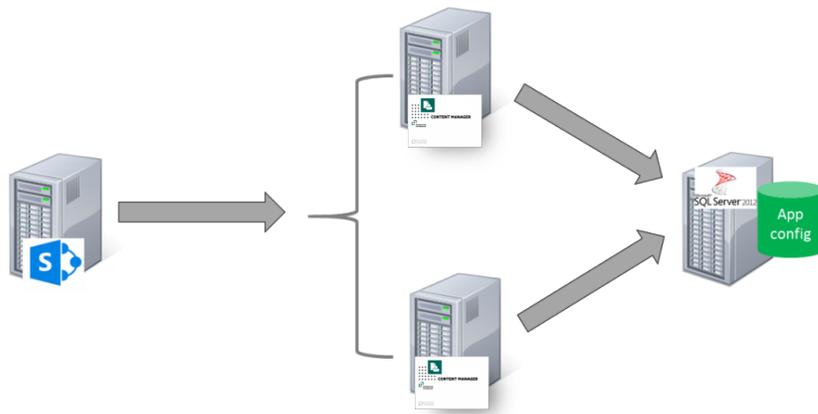


Workgroup servers

Following are the scenarios for server topology configuration:

Scenario 1:


This scenario involves single Content Manager workgroup server servicing the SharePoint farm.

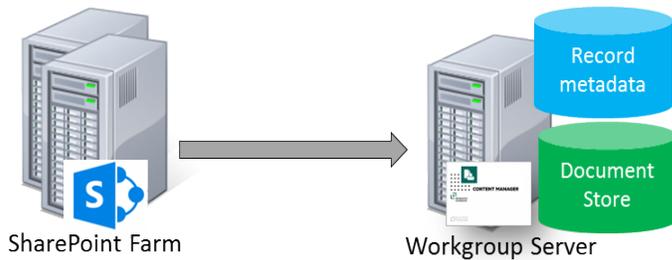

Running the workgroup server on a SharePoint server is not currently supported.

Scenario 2:

In this scenario, depending on the performance of workgroup server and the number and type of management tasks performed for SharePoint, you can have each component on separate server. The workgroup server, database server, and storage server are installed on separate servers.

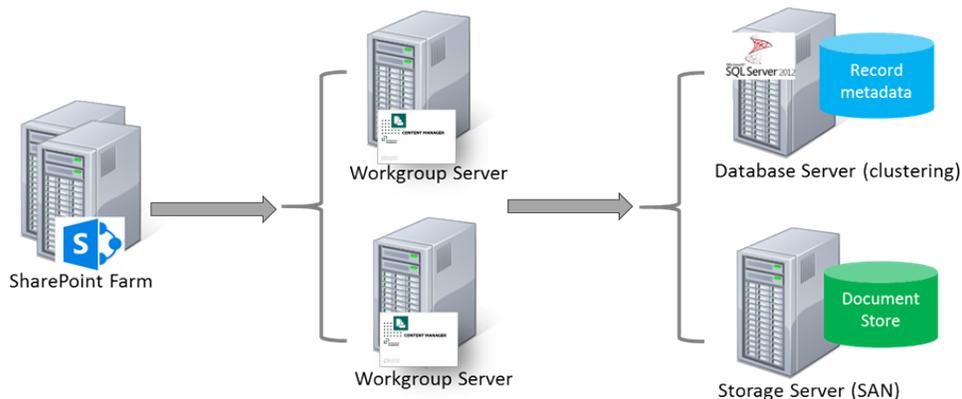


If the workgroup server is unavailable, the information management is not possible for SharePoint content. To overcome this drawback, it is recommended to make available one other Content Manager workgroup server.


NOTE: The collection of workgroup servers in use is referred to in the rest of this document as the Content Manager Farm.

Scenario 3:

Your organization may already have existing workgroup servers if it has an existing implementation of Content Manager. It is possible to use existing workgroup servers in lieu of dedicated servers used only by SharePoint.

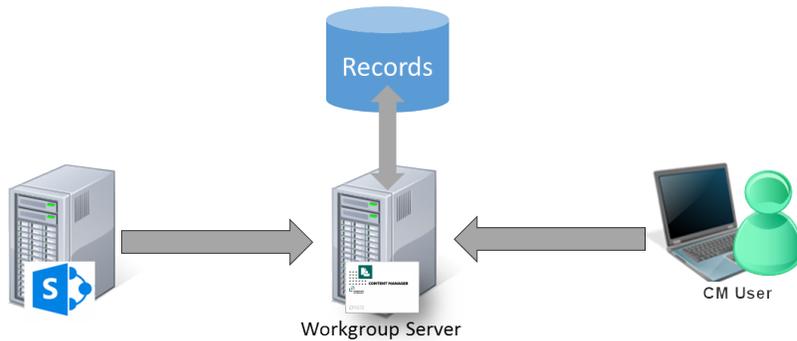

In this scenario, SharePoint is utilizing a workgroup server (or collection of workgroup servers) that is already in use in the organization. Content Manager users can continue to use that workgroup server even though it is also being used for SharePoint management. This may be a suitable configuration in smaller deployments.

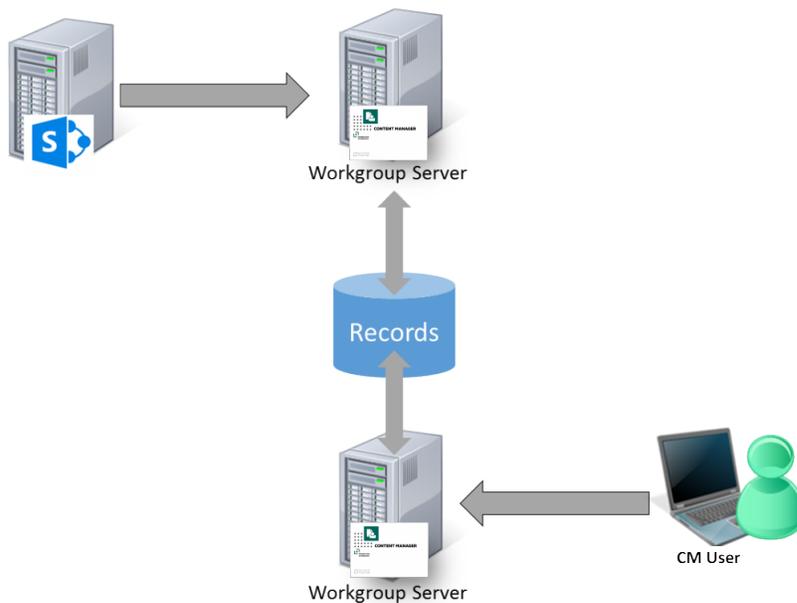

Scenario 4:

In the illustrated scenario, records created from SharePoint content and records created by Content Manager users all reside in the same dataset. The records are simply accessed via different workgroup servers. In this example, the Content Manager user would be able to access records created from SharePoint, and SharePoint users would be able to access records created by the Content Manager user.

Using dedicated workgroup servers in this manner allows distributing much of the load to allow sufficient performance for both SharePoint and for Content Manager users.

NOTE: These illustrations are simplified explanations of workgroup server architecture. Please consult the Content Manager documentation for a more detailed understanding.

Determining the number of workgroup servers

Determining the number of workgroup servers in your Content Manager farm is based on the organization's requirements and performance metrics.

You may define metrics identifying the maximum time that should be taken to process a task or job in the queue. If the metric exceeds, consider improving the performance of the existing workgroup server or adding more workgroup servers to your Content Manager farm.

SharePoint events are handled by the Content Manager servers. For example, when a managed item is modified by a user in SharePoint, the Content Manager server is called synchronously to confirm that the change is permitted and make any necessary updates to the record.

If you encounter noticeable delays when saving updated list items, this indicates that the servers in the Content Manager farm have reached maximum capacity.


See [Appendix: Performance planning](#) for guidance around determining hardware requirements. Also see the ***Understanding the job queue*** section of the user guide for further details around how jobs are distributed.

2.2.2 Distributed architectures

This section covers common scenarios where an organization may have to geographically distribute system components and/or support multiple different SharePoint farms.

Multiple SharePoint farms - collocated

Multiple SharePoint farms can be supported by Content Manager. There are additional configuration steps required to support scenario. See, [Supporting multiple SharePoint farms or multiple configuration databases](#).

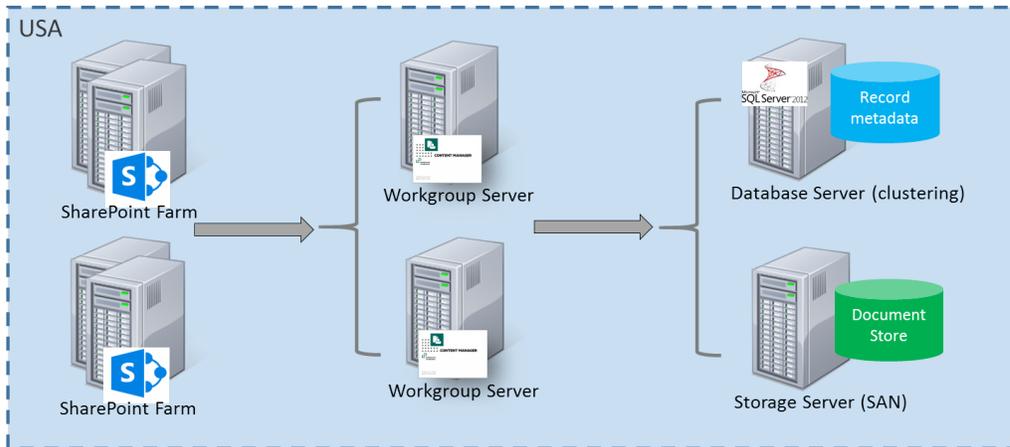


Multiple SharePoint farms – distributed

This scenario involves an organization with multiple SharePoint farms that are geographically distributed. For the examples, the farms are located in Australia and the USA and it is assumed there are network latency issues between the data centers.

Collocated workgroup server farm

An approach to service these farms is to use a single workgroup server farm collocated with one of the SharePoint farms. Both SharePoint farms connect to this workgroup server farm.

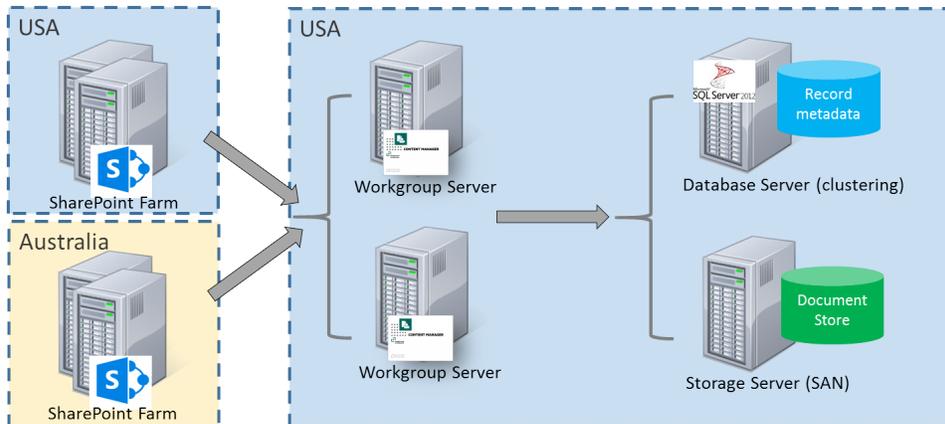


This approach has the following considerations:

- Pros
 - Single location for maintenance and efficiency
 - Single dataset
 - Single document store
 - Simpler backup strategy
 - Less infrastructure as both countries get redundancy from the same set of infrastructure

- IDOL indexing does not suffer from network latency for Australian content
- Retrieving Australian documents from USA no latency impact
- Cons
 - Editing managed list items in Australia would suffer from any Australia to USA latency (noting that we can accommodate up to 59 seconds latency but user's would probably only accept 4 seconds for a useability perspective).
 - Retrieving documents via search would be subject to Aus-US latency
 - Jobs running against Australia farm will take longer (but user does not see this)
 - Retrieving USA documents from Australia latency impact. Workgroup server caching and pre caching can minimize this impact.

Distributed workgroup server farm

An approach to service distributed SharePoint farms is to distribute the servers in the workgroup server farm across the two geographic locations. Each SharePoint farm connects to the workgroup server/s in its geographic location. Jobs for the region are processed on that regions workgroup server/s.

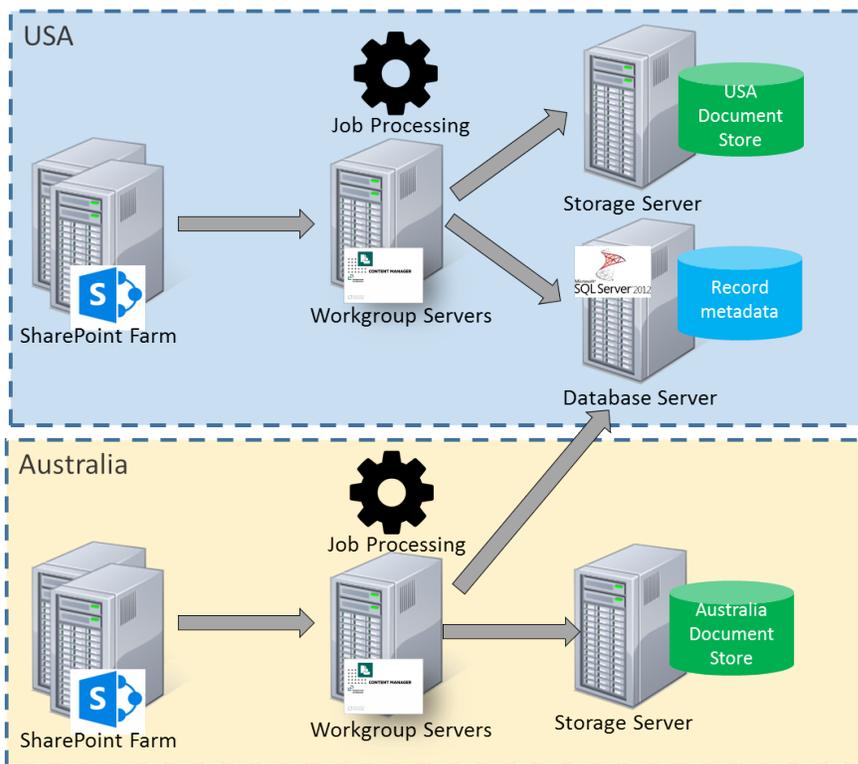


This approach has the following considerations:

- Pros

- Shared database infrastructure – lower maintenance
- Both regions share the database redundancy capabilities
- Document retrieval through search fast
- Can configure each region to only process their own jobs
- Cons
 - More infrastructure to provide workgroup server redundancy in each region
 - Multiple document stores
 - If IDOL indexing in USA will suffer latency for Australian documents
 - Retrieving Australian documents from USA (and vice versa) latency impact. Happens through search or during relocation.
 - Editing managed list items in Australia could suffer from any latency to database server.
 - Job processing on Australian server impacted by latency to database server.

Distributed workgroup server farm with central job processing

An approach to service distributed SharePoint farms is to distribute the servers in the workgroup server farm across the two geographic locations. Each SharePoint farm connects to the workgroup server/s in its geographic location. In this scenario, all jobs for all regions are processed by one of the workgroup server farms.

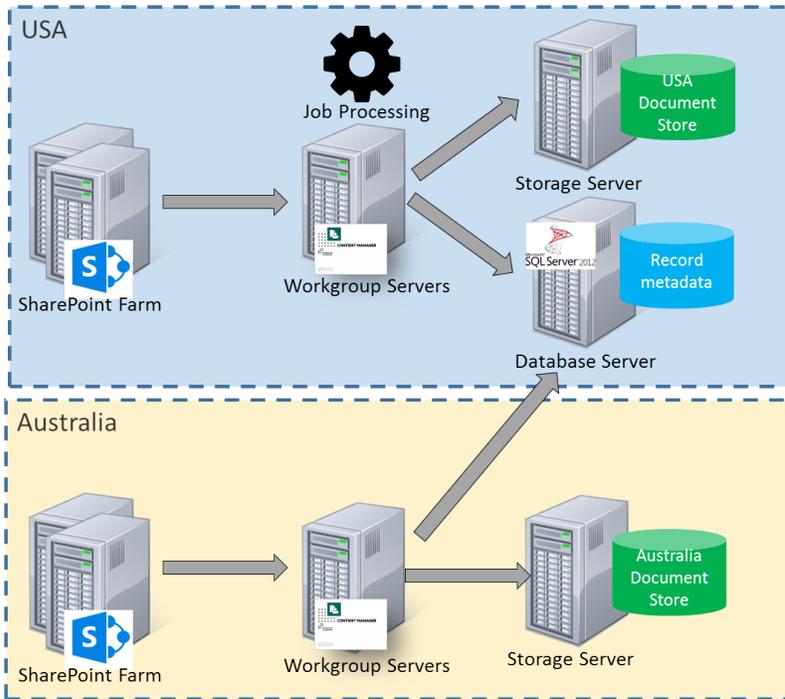


This approach has the following considerations:

- Pros

- Can scale out in a central place rather than distributed as jobs are processed in a central place
- Jobs are processed close to Content Manager so Content Manager interactions have no latency
- Cons
 - Workgroup servers in Australia are underutilized
 - Jobs for Australian content suffer latency reaching the Australian SharePoint farm

Separation of Content Manager

Another approach to management of geographically separated SharePoint farms is to have an entirely separate Content Manager infrastructure for each SharePoint farm.

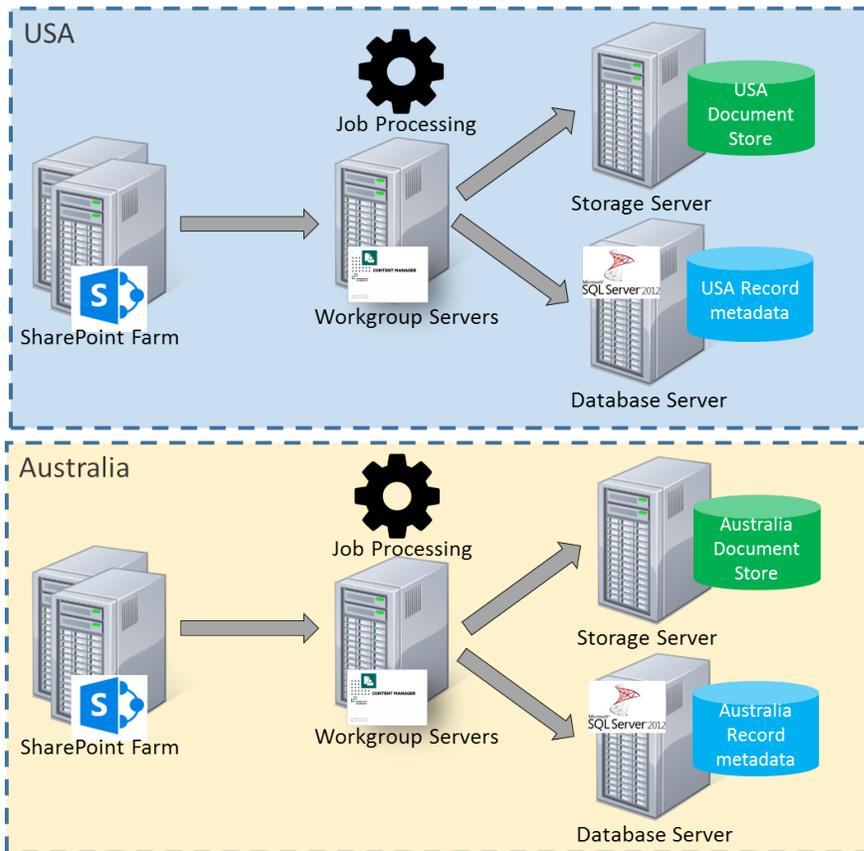

This approach has the following considerations:

- Pros
 - No latency
 - Can configure search across both datasets
- Cons

- Siloed information
- Maintenance of two separate infrastructures
- May result in underutilized servers

3 Initial Setup and Installation

3.1 On Content Manager server

The components used by the app to interact with Content Manager must be installed on all Content Manager servers that you have identified for your Content Manager Farm. Before you begin, there are features that must be enabled. This section covers the preparation that must be performed to ensure your Content Manager farm is ready for installation to begin.

3.1.1 Server roles and features

IMPORTANT: In addition to the .NET Framework mentioned in the below sections, it is highly recommended to install .NET Framework 4.7.2. If this version of .NET Framework is not available with the server features, make sure to install it manually.

Server roles

Content Manager servers must have the following role and role elements enabled:

- Application Server role
 - .NET Framework 4.5
 - Web Server (IIS) Support
- Web Server (IIS) role
 - Web Server
 - Security
 - Windows Authentication

Server features

Content Manager servers must have the following features enabled:

- .NET Framework 3.5 Features
 - .NET Framework 3.5 (includes .NET2.0 and 3.0)

NOTE: The .NET Framework 3.5 feature is not required for Azure environments.

NOTE: To install .NET 3.5, you will need the windows server DVD mounted in the dvd drive or else use the alternative path and point to the sources\sxs folder of the windows server dvd.

- .NET Framework 4.5 Features

- .NET Framework 4.5
- ASP.Net 4.5
- WCF Services
 - HTTP Activation
 - Message Queuing(MSMQ)Activation
 - Names Pipe Activation
 - TCP Activation
 - TCP Port Sharing
- Windows Process Activation Service
 - Process Model
 - Configuration APIs

NOTE: The Windows Process Activation Service will be automatically activated as a result of activating the HTTP Activation feature.

3.1.2 AppFabric

NOTE: This section does not apply if your Content Manager servers are installed in a Windows Azure environment. See [Azure Cache](#) section in General Administration Tasks.

Configuration caching is used by the application to improve performance. The technology underpinning this configuration caching is Microsoft AppFabric.

All Content Manager servers in the farm must have AppFabric correctly installed and configured.

NOTE: This section assumes that you have configured all [3.1.1 Server roles and features](#), on the [previous page](#) prior to beginning the installation.

The supported version is 1.1 x64.

For more information on installing and configuring AppFabric, see [AppFabric Cache, on page 121](#).

3.1.3 Azure caching

For instructions to create Azure cache, details of cache endpoint, and the primary cache key during configuration, see the appendix [Azure cache](#).

3.1.4 SQL Server

Install the following SQL server components on the Content Manager workgroup server. This step is only necessary on the server where you will run the configuration tool on.


Install the Microsoft SQL Server feature pack. It is necessary to download and install the following component:

- ENU\x64SQLSysClrTypes.msi

The SQLSysClrTypes.msi can be downloaded from the following location <https://www.microsoft.com/en-us/download/confirmation.aspx?id=56041>.

For information on MS SQL Server supported versions, see *Content Manager Specifications and Limitations* document.

Failure to install these on a workgroup server will result in an error similar to the one below when running the configuration tool or the configuration wizard:

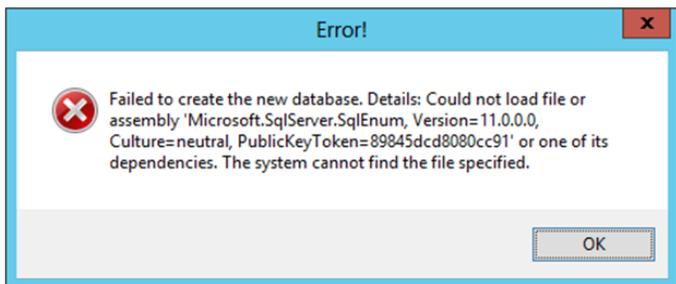

In the configuration wizard pre check window, the **SQL Server Client Tool** check fails.

3.1.5 SharePoint client components

The connection to SharePoint is made from the Content Manager server using the SharePoint **Client Side Object Model**, known as the **CSOM**. These components are responsible for the communication between the Content Manager and SharePoint.

The CSOM is installed by the **SharePoint Server 2013 Client Components SDK** MSI available from Microsoft. Download and install these components from here: <http://www.microsoft.com/en-us/download/details.aspx?id=35585>.

NOTE: Make sure to download and install the 64bit version of these components.

NOTE: For Content Manager 10.1, make sure to download and install the 64 bit version 16 of client components from the following link: <https://www.microsoft.com/en-us/download/details.aspx?id=42038>.

NOTE: Make sure to install these components on all Content Manager Workgroup server before you install the CM Governance and Compliance app. Otherwise, you will encounter an error and not be able to run the Content Manager SharePoint integration MSI.

3.1.6 Configure Content Manager

3.1.6.1 Workgroup server configured

All servers that will form part of the Content Manager farm must be configured to run as workgroup servers. Each server must have access to any Content Manager datasets that you intend to use when managing SharePoint content.


For details regarding how to configure a workgroup server, see the Content Manager documentation.

3.1.6.2 Configuring the account, permissions and granting access for a location

The following steps assume that a Content Manager Internal Location of type “Person” has already been created for the applicable account.

NOTE: Although the following example screenshots depict configuration for the job service account; the steps are applicable for configuring the profile of any Content Manager “Person” Location.


1. Logged into the Content Manager client as an **Administrator**, locate the applicable Location using the **Internal Locations Directory** from the **Search** menu. Double-click the location name to open the properties dialog.
 - a. In the **Network Login** tab of the Location’s Properties, to enable a Location to accept logins, check the option to **Accept logins for this user using credentials**. Enter the domain account details (User name and Domain Name).

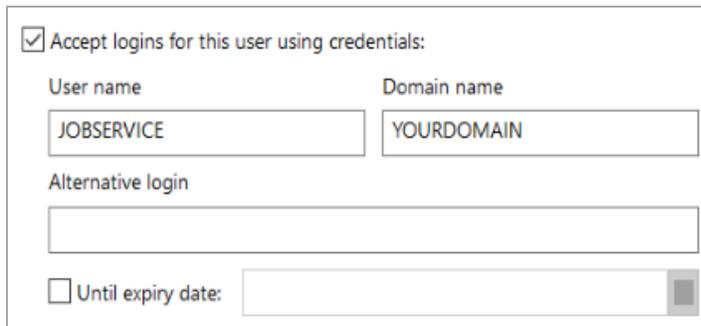

- b. In the **Profile** tab, to provide a security level of <Highest> to a Location, click **Security** and in the resulting dialog, select the **Highest** level. Click **OK** to return to the Properties dialog.



- c. To set the User Type of the Location, select the applicable option from the **User Type** drop-down menu.

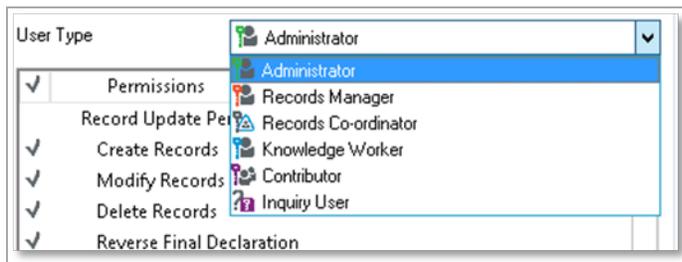

2. Click **OK** on the properties dialog to save settings.

Prepare user locations

All the users managing the content using SharePoint must have valid location in Content Manager. User accounts must be active and the login details should include that the user will access SharePoint.

When using SharePoint online, the format of the accounts present in Content Manager is as follows:

username@domain

For example

steven@acme.com

Make sure that the account details on the **Profile** tab for a location use the same format.

NOTE: This does not apply to the service accounts [Job Processing service account](#) and [Application pool account](#). These will require the account name and domain fields on the profile tab to be completed separately regardless of whether you are using SharePoint Online or an on premise SharePoint farm.


Permissions

Locations must be at least a **Contributor** in Content Manager to manage content. Locations that use the default **Contributor** or **Knowledge Worker** user types in Content Manager must have the **Modify Record Additional Field Values** permission enabled. This is not enabled by default.

It is suggested that you make this modification globally rather than on a location by location basis. See, [Setting the permissions granted to a user type](#) section for instructions.

3.1.6.3 Add trusted server accounts

1. Logged into the Content Manager Enterprise Studio as a system administrator. Select the Dataset used for SharePoint and Content Manager integration. Go to, **Home > General > Options**. The **Options** window is displayed. Click **Other** tab.
2. In the field captioned **Enter user account name and press Add**, enter the name of the job service account in the format *domain\username* and click **Add**.

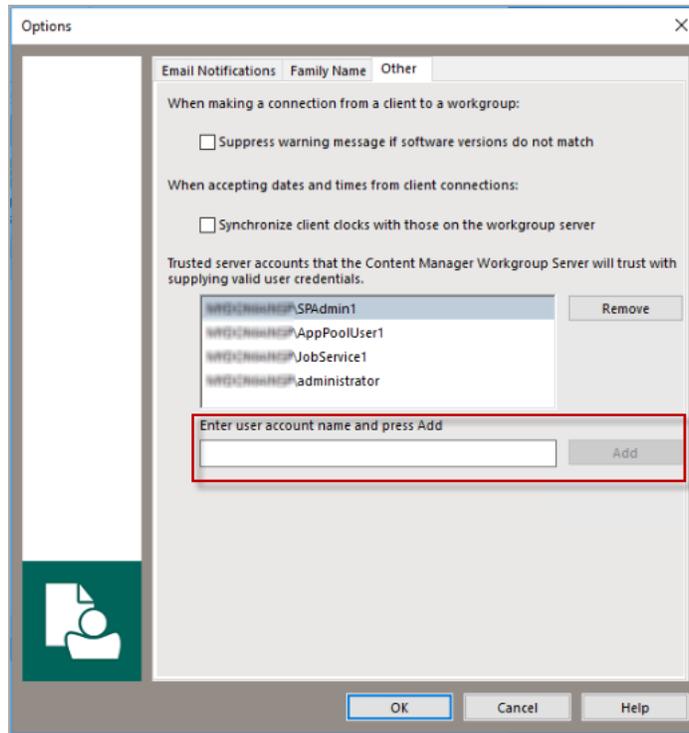


3. With the job service account added to the trusted server accounts list, click **OK** to close the dialog.
4. Save and deploy your changes in the **Content Manager Enterprise Studio**.

3.1.6.4 Enable Content Manager features

There are two Content Manager features that need to be enabled. Perform the following steps to enable them:

1. Run the Content Manager as an administrator. Go to **Administration > System**. The **System Options** window is displayed.
2. Click **Features**.
3. Enable the **Content Manager SharePoint Integration** and **SarePoint Zero Footprint**

features.

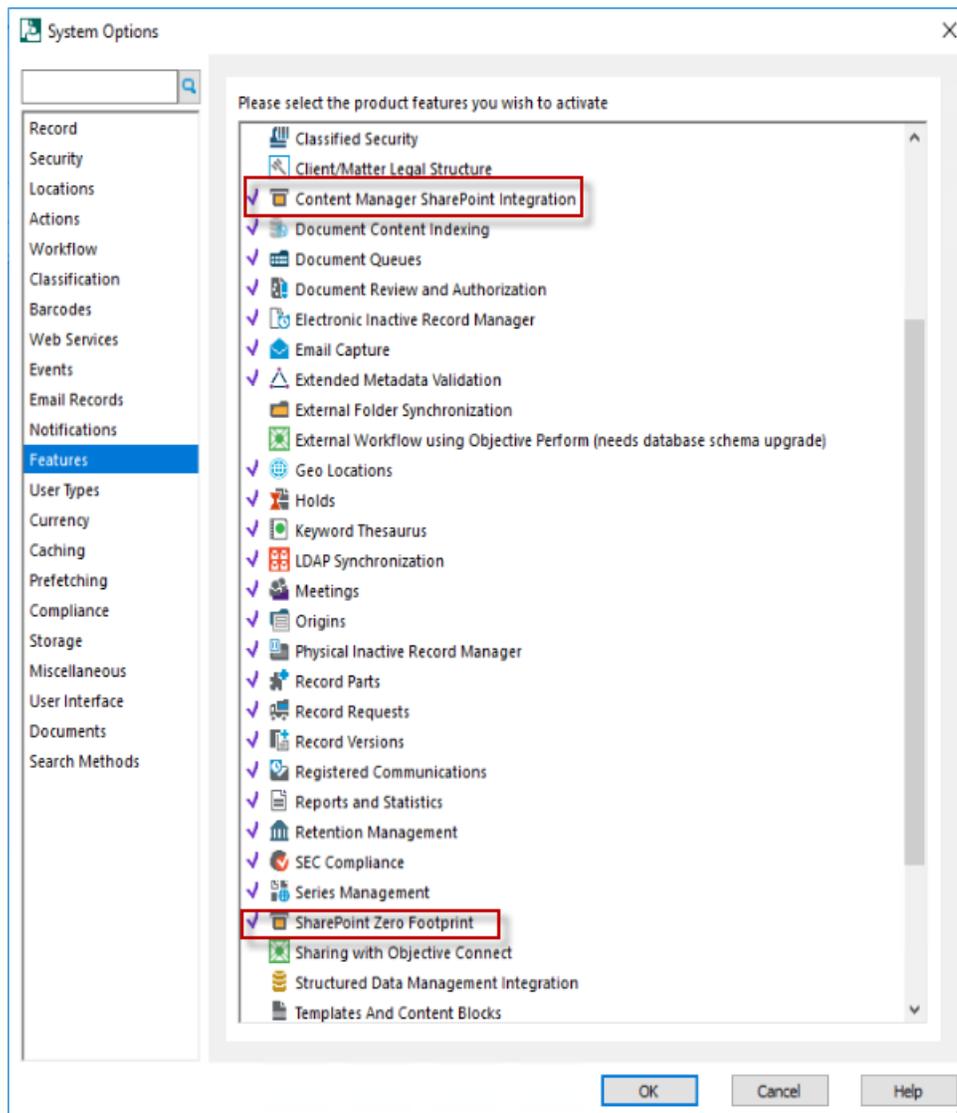

NOTE: After enabling the features, restart the Content Manager Workgroup Windows service for the settings to take effect.

3.1.6.5 Add to a SharePoint farm

All servers in the Content Manager farm must join the same SharePoint farm.

1. Open the **Content Manager Enterprise Studio**.
2. Expand the **Workgroup Servers** node.
3. For each Workgroup server under this node (that you are using in your Content Manager farm):


- a. Double-click the server to open the properties dialog.
- b. Choose a SharePoint server farm to join to. The value you choose is arbitrary, however all servers that form part of the same Content Manager farm must use the same value.
- c. Click **OK**.

Once all the workgroup servers are configured, save the configuration and deploy it to all the servers. For details, see [Saving and deploying Content Manager configuration settings](#).

3.1.6.6 Enable event processing

You must enable event processing for each dataset used for managing SharePoint content. Using “Content Manager Enterprise Studio”, for each dataset perform the following steps:

1. Expand the **Datasets** node.
2. Right-click on the dataset to be used and choose **Event Processing > Configure**.
3. Ensure that the **SharePoint Integration** event processor type is set to **Enabled** and then click **OK**.

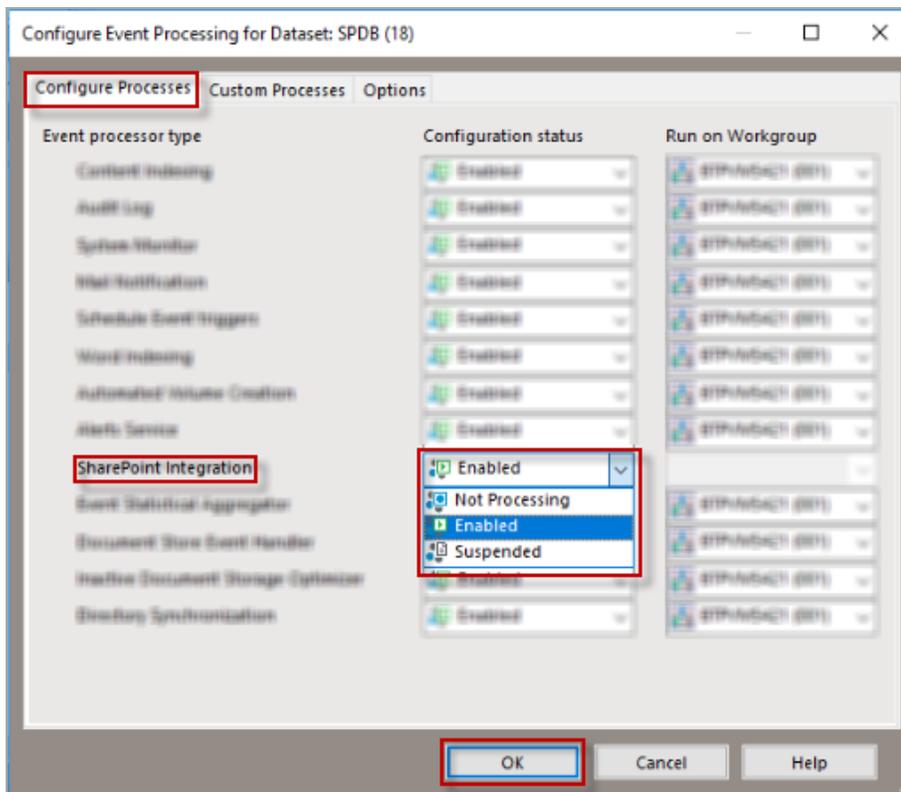


Reducing event handling time

The Content Manager event handler periodically examines the event queue to determine if there are events to be processed. By default, this polling of the event queue is performed every 120 seconds. This may lead delays in processing Content Manager record changes.

It is recommended that you decrease this polling time to reduce the amount of time taken to process these types of changes.

On the event handling configuration dialog (see previous section), navigate to the **Options** tab. Change the **Event queue polling interval** to a lower time frame. It is recommended that you do not reduce this interval to less than 30 seconds as this can cause errors during document maintenance.

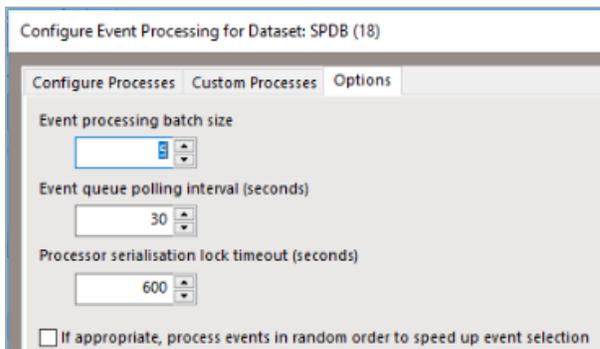

3.1.6.7 Prepare datasets

The dataset used for SharePoint management must be configured to support Unicode. To enable this support, run **Content Manager Enterprise Studio** as an **administrator**.

NOTE: The process to enable Unicode has changed since previous versions. Ensure you follow the steps below correctly in order to enable Unicode support on your datasets.


In Content Manager 9.0, you cannot directly convert a dataset from ANSI to Unicode. Create a new dataset, initialize it with Unicode support and then migrate existing data over to it. You will need to create a new dataset, initializing it with Unicode support and then migrate your existing data over to it.

Locate the dataset that is to be used and review the description. The description will include the term **Unicode** if Unicode has been enabled.

If this has not been enabled, select **Create Dataset** from the ribbon and follow these steps:

1. Follow the dataset creation steps until you reach the Initialization wizard step. Ensure to supply a bulk loading path during the creation process, otherwise it will not migrate to Unicode.
2. Check the **Migrate** option and select the **Migrate data from Content Manager dataset** from the drop down.
3. Check **Support storing unicode character in string columns** option.

4. Click **Next** and follow the rest of the prompts to create the new dataset.

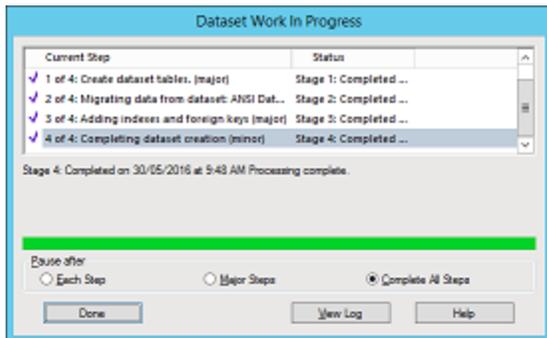


Upon completion of the tool you should be able to see the new dataset and the old, the new one showing Unicode support in the description.

3.1.6.8 Saving and deploying Content Manager configuration settings

In the Content Manager Enterprise Studio, once you have made all the required changes:

1. Save the configuration. From the **File** ribbon, click on the **Save** icon.
2. Deploy the configuration changes. From the **File** ribbon, click on the **Deploy** icon.

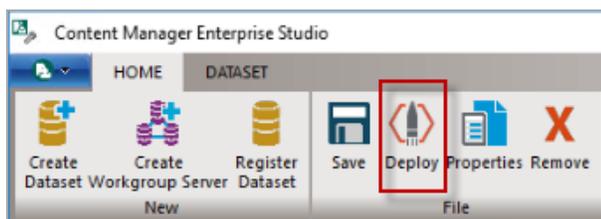

NOTE: If you receive an error when attempting to save configuration, then you need to close the Enterprise Studio, and run it again as Administrator.

3.1.7 Render configuration wizard help

To get the configuration wizard help files to render properly, install the Microsoft WebView2 Runtime. You can download from the following location: [Microsoft WebView2 Runtime](#).

NOTE:

- If WebView2 Runtime is not installed the help will displayed in Edge browser.
- If Webview2 Runtime is installed but failed to load due to permissions issue, then also help will be displayed in Edge browser.
- The help displayed in the Edge browser is not context sensitive.

3.2 On SharePoint server

3.2.1 Prepare the corporate App catalog

The Content Manager Governance and Compliance app will be hosted in your corporate app store following installation.

In SharePoint Online, an app catalog is available automatically. In an on premise installation either you need to create new app catalog or need to know to access the existing app catalog.

Identifying the app catalog in use

During installation, you need to access the corporate app catalog to upload the Content Manager Governance and Compliance app as part of the configuration process.

For an on premise installation of SharePoint, it is possible to identify the app catalog in use using central administration. For SharePoint Online, the SharePoint admin center provides access.

You will need the URL of your app catalog during the configuration stage.

For more information, see the appendix [Identifying the app catalog in use](#).

To create an app catalog, see the [Creating an app catalog](#) and to configure the app URL, see the [Configuring an app URL](#).

Enable the required services

NOTE: This section is not applicable to SharePoint online.

To install and deploy apps, ensure the following services are running on the farm:

- App Management Service
- Microsoft SharePoint Foundation Subscription Settings Service
- User Profile Service
- User Profile Synchronization service (required only for Sharepoint 2013)

Upgrade considerations

Retirement of Remote Event Receivers in SharePoint Online

Due to the retirement of Retirement of Remote Event Receivers (RERs) in SharePoint Online, consider the following key points when planning and executing the Content Manager and SharePoint integration upgrade:

- Managed document metadata changes in SharePoint may take some time to synchronize with the corresponding record in **Content Manager**.
- All updates rely on SharePoint Server webhook notifications for processing.

- SharePoint document metadata updates, as well as **check-in** and **check-out** functionalities, continue to operate as in previous versions.
- However, **user permission synchronization** may not occur if **Content Manager ACLs** (Access Control Lists) are implemented within SharePoint.
- If the **Governance App** is removed from a SharePoint site, any existing jobs already queued in the **Job Queue** will continue to be processed.
- However, **LMP** (Lifetime Management Policies) jobs will not be processed after the app is removed.
- After completing the integration upgrade, all **LMPs** must be **re-applied** through the **Default Integration Settings** page to ensure proper synchronization and functionality.
- The site collection administrator can edit the Finalized documents, but those changes are applicable only in SharePoint and does not reflect in Content Manager.

NOTE: After configuring the new SPFx app for all the sites and subsites, remove the old app. Then, after adding the new app, click **Content Manager Settings** and make sure to navigate to the App Start page.

Preservation and Hold Library Configuration

To ensure proper handling of deleted documents, configure the Preservation and Hold library in SharePoint through an appropriate Retention Policy.

This configuration ensures that when **Managed** or **Finalized** documents are deleted from the SharePoint site, copies of those documents remain accessible within the Preservation and Hold library.

If the Preservation and Hold library is not configured, the SharePoint Integration process will be unable to retrieve deleted documents for storage in Content Manager — only the associated metadata record will be retained in Content Manager.


If you choose not to configure the Preservation and Hold library, it is strongly recommended that documents be relocated to Content Manager to prevent loss of document content when deleted from SharePoint.

NOTE: If a Retention Policy is configured, the integration will be unable to delete the Preservation folder, which prevents the Relocated Site from being removed from SharePoint.


3.2.2 Identify the default site collection

During configuration, you will be required to identify a site collection that will act as the default site collection. The default site collection is used as the provider of default configuration values for other site collections.


On the default site collection you can define the configuration settings that will be used by that site collection.

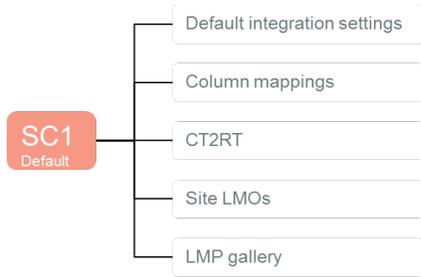

Other site collections can then elect to use the configuration that is specified on the default site collection.

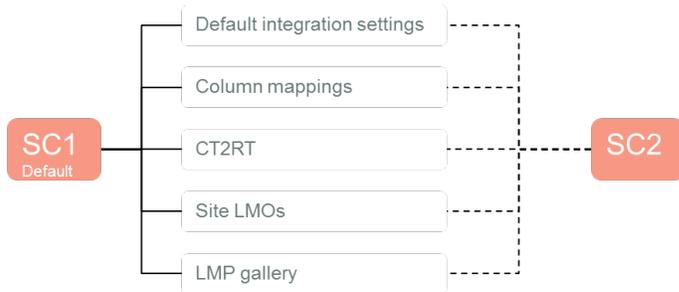

It is even possible to indicate that a site collection will only use some of the default site collection values, and provide values for other configuration.

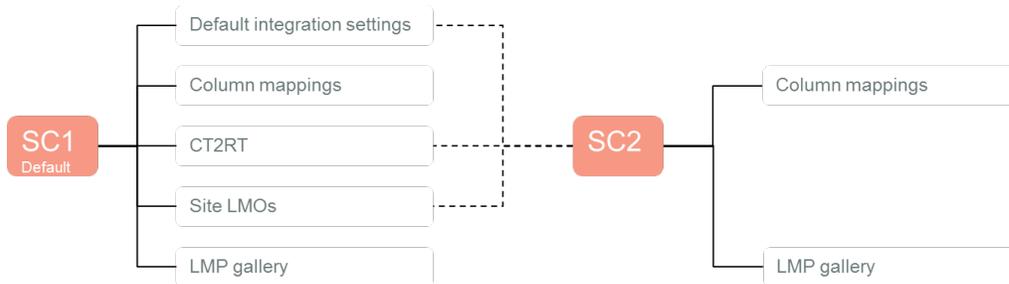

Considerations for choosing the default site collection

If you are using a site collection as a content type hub, this site collection would make a good candidate for the default site collection as it is already used to provide information to other site collections in your farm. It therefore may be logical to extend it to provide the Content Manager default configuration as well.

3.2.3 SharePoint app creation using Powershell script to create Azure AD app

1. Go to the path, <Installation Folder>\Content Manager\Content Manager SharePoint Integration\SharePointConfiguration\CreateAzureApp, and run the script in Windows Powershell as Administrator.
2. Enter Sharepoint Tenant domain.
3. Enter Redirect URI or CMFARM Uri.

```
PS C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\SharePointConfiguration> .\CreateAzureApp.ps1
Enter sharepoint tenant domain (e.g., contoso.onmicrosoft.com) : cmqintegration.onmicrosoft.com
Enter Redirect URI or CMFARM Url(e.g., https://myapp.com or http://localhost): https://cmqaspint.com
localPath Path: C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\SharePointConfiguration
Certificate Path:
Welcome to Microsoft Graph!

Connected via delegated access using 14d82eec-204b-4c2f-b7e8-296a70dab67e
Readme: https://aka.ms/graph/sdk/powershell
SDK Docs: https://aka.ms/graph/sdk/powershell/docs
API Docs: https://aka.ms/graph/docs

NOTE: You can use the -NoWelcome parameter to suppress this message.
```

```
PrincipalDisplayName : CMGovernanceComplianceApp
PrincipalId          : eb1baa46-9d47-4ec8-8375-6fccdf30b69a
PrincipalType       : ServicePrincipal
ResourceDisplayName : Office 365 SharePoint Online
ResourceId          : 984eaa0d-aded-4b95-a627-3210390b2fc2
AdditionalProperties : {["@odata.context", https://graph.microsoft.com/v1.0/$metadata@appRoleAssignments/$entity]}


AppRoleId           : c8e3537c-ec53-43b9-bed3-b2bd3617ae97
CreatedDateTime     : 9/10/2025 9:12:05 AM
DeletedDateTime     :
Id                 : Rqob60edyE6DdW_M3zC2mqUCZY_6th1BgSkbRvJfCL0
PrincipalDisplayName : CMGovernanceComplianceApp
PrincipalId        : eb1baa46-9d47-4ec8-8375-6fccdf30b69a
PrincipalType      : ServicePrincipal
ResourceDisplayName : Office 365 SharePoint Online
ResourceId         : 984eaa0d-aded-4b95-a627-3210390b2fc2
AdditionalProperties : {["@odata.context", https://graph.microsoft.com/v1.0/$metadata@appRoleAssignments/$entity]}

AppRoleId           : 741f803b-c850-494e-b5df-cde7c675a1ca
CreatedDateTime     : 9/10/2025 9:12:06 AM
DeletedDateTime     :
Id                 : Rqob60edyE6DdW_M3zC2mm2ISwW_EQFNkckYintbpUk
PrincipalDisplayName : CMGovernanceComplianceApp
PrincipalId        : eb1baa46-9d47-4ec8-8375-6fccdf30b69a
PrincipalType      : ServicePrincipal
ResourceDisplayName : Office 365 SharePoint Online
ResourceId         : 984eaa0d-aded-4b95-a627-3210390b2fc2
AdditionalProperties : {["@odata.context", https://graph.microsoft.com/v1.0/$metadata@appRoleAssignments/$entity]}

App 'CMGovernanceComplianceApp' created successfully!
Tenant id: d98345d4-83eb-48b6-9306-12486c344491
Certificate Thumbprint: EB5A67D14179453ADE9EC1E934B7F956DABD248B
Certificate saved at: C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\Certificates\CMGovernanceComplianceApp.pfx
SharePoint permissions assigned and admin consent granted.
All information written in C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\Certificates\CMGovernanceComplianceAppInfo.xml

PS C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\SharePointConfiguration>
```

4. When the system prompts for permission, click **Accept**.

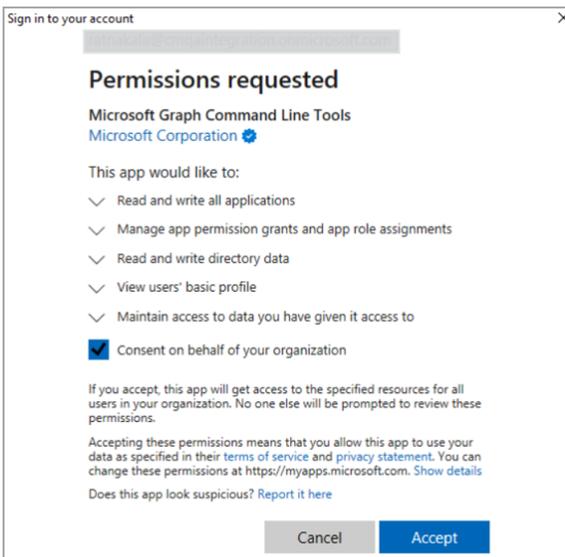

After successfully creating the app, login to **Portal.azure.com** to check that the app is created with the name as **“CM Governance And Compliance”**.

NOTE: Once the app is created successfully, respective app details will be captured under SharePoint Integration folder. For example, C:\Program Files\Micro Focus\Content

Manager\Content Manager SharePoint Integration\Certificates. Make sure to store the certificate in a secure folder.

3.2.4 Creating Content Manager term sets

In SharePoint, you can define set of terms that can be used across your SharePoint farm.

Content Manager for SharePoint utilizes term sets to represent the following types of Content Manager data:

- Record types
- Classifications
- Security levels
- Security caveats

These terms must be created in SharePoint using the tools provided.

NOTE: Creating term sets must be separately instigated. If you fail to do this, you will not be able to complete configuration of the product.

Currently only single SharePoint farm Managed Metadata Services are supported. There is no support for sharing services across multiple SharePoint farms. It is possible to share services across farms and it may work for the creating and using the Content Manager term sets, however no support will be provided in case there are problems encountered.

1. Create a group for the Content Manager database

Term sets are created in “Term Stores” that reside in a “Managed Metadata Services” (MMS). In a term store you can define a group that is used to logically group related term sets. In order to create the Content Manager term sets, a dedicated group must be created for each Content Manager dataset that terms are required for.

To create this group, **you must be a term store administrator**. For instructions on how to add a user as a term store administrator, see the [Adding a term store administrator](#).

For each MMS that is used by your SharePoint farm to provide term sets, you must create a new group in the term store (see the [Creating a term store group](#) for details if required).

Once the group has been created, you must give sufficient permission to allow the creation of the terms. For details, see [Granting permissions to a term store group, on page 144](#).

2. Instigating term set creation

The creation of term sets is performed using the configuration tool.

NOTE: It is advised to stop the SharePoint service when undertaking term set creation or maintenance.

Open the configuration tool and navigate to the **Tools > Term Sets** tab. See [Term sets](#) for more details.

3. Supported Configuration

The Term Set should only be created on the same SharePoint farm that the SharePoint Integration is configured on.

For details on term store, see [Working with the term store, on page 142](#).

3.3 Identify and configure accounts

There are several key accounts that are used by the product. These accounts must have specific permissions to the Content Manager Server, to Content Manager datasets and also to SharePoint. This section describes the permissions that these accounts must have.

It is advisable to identify and configure these accounts prior to installation and configuration.

Installing user

The installing user is the account that will be used to:

- Install the Content Manager for SharePoint MSI
- Configure the app using the configuration wizard
- Provision the app in the app catalog
- Add the app to site collections

This user must have the following permissions:

- Have **dbcreator** permissions in the SQL Server instance in use
- Contribute permissions to the Apps for SharePoint list in the [corporate app catalog](#)
- Site collection administrator for the site collection that will be used as the [default site collection](#)
- A term store administrator for the managed metadata service used by the default site collection.
- Have a location in Content Manager with a user type of **Records Co-ordinator** or higher.
- Read access (or higher) to the location that the high trust certificate is installed on every server in the Content Manager farm

Job processing service account

The job processing service account is used to run the “Content Manager SharePoint Service”. During installation you will be asked for the account to use for this service. Provide an account that has the following permissions:

- Have a location in Content Manager with a user type of **Administrator** and a security level and security caveats at least as high as any records that will be managed. The preference is to grant “<Highest>” security.
- Annotated in Content Manager Enterprise Studio that it can impersonate other accounts (see the appendix “Indicating that an account can impersonate” in the Content Manager tasks section)

- Granted the “log on as a service” right on the machine (the installation process will grant this permission for you)
- Member of the “Performance Monitor Users” group on every server in the Content Manager farm (this is not required in Windows Azure environments)
- A site collection administrator on all site collections that will be managed (required for necessary document access) (**Applicable for SharePoint On premise only**)
- Read access (or higher) to the location that the high trust certificate is installed on every server in the Content Manager farm

Application pool account

An account is required to identify the application pool that will run the IIS site created by the installer. During installation you will be asked for the account to use for the application pool. You will need to provide an account that has the following specific permissions:

- Have a location in Content Manager with a user type of **Administrator** and a security level and security caveats at least as high as any records that will be managed. The preference is to grant “<Highest>” security.
- Annotated in Content Manager Enterprise Studio that it can impersonate other accounts
- Be a member of the local **IIS_USRS** group on every server in the Content Manager farm.
- Read and write permission to the installation directory (the installation process will grant this permission for you)
- Be a member of the **Performance Monitor Users** group on every server in the Content Manager farm (this is not required in Windows Azure environments)
- Read access (or higher) to the location that the high trust certificate is installed on every server in the Content Manager farm

NOTE: It is preferable to have separate accounts for the application pool and job processing service, it is acceptable to make them the same account.

Document viewers group/user

When documents that have been managed are viewed from Content Manager, the document is retrieved from SharePoint in order to display to the user. This document retrieval is performed by the **Content Manager Workgroup Service** and is therefore performed as the identity that is used by that service.

During configuration you will be asked to specify a group or user who is permitted to perform this document retrieval. This is known as the document viewers group or user.

Ensure that this group has the following members:

- The identity used to run the “Content Manager Workgroup” windows service (see the appendix “Identifying the account that a Windows service is running as”)

Job queue administrators

Tasks and requests are performed by jobs in the job queue. Any user can view their own jobs but only members of the job administrators group can view all jobs from all users.

During configuration you will be asked to specify a group that contains the users who are considered job administrators. You should identify a group that has only those who are required to view all jobs.

Ensure that this group has the following members:

- All users that will need access to see all jobs in the job queue

If an AD group is not suitable for your environment needs, you can specify a list of users who should have this permission instead.

Search administrators group

When a federated search is executed, the result source is configured to attempt the search as a specific user. Although the identity of the request will be presented as this user, it is the interactive user that the search will be performed as.

In order to prevent malicious users attempting to perform searches on behalf of others, the identity of the request must be confirmed as a trusted identity. Trusted identities are indicated by their inclusion in a particular AD group. This group is known as the **Search Administrators** group. During configuration you will be asked for the group to use. You should identify an AD group that only has the search identity in it.

Ensure that this group has the following members:

- All users that will be used as the NTLM credentials for a result source that access Content Manager records

For more information on the process of creating a result source, see *Content Manager SharePoint Integration User Guide*.

Default search location

There are situations where it is not possible to configure a result source to use a particular NTLM account. In those scenarios, the request will be presented as an anonymous. In this scenario, if a value is specified for **the Default Search Location**, the search will be performed as this user, regardless of who the interactive user is.

You will be asked during configuration for an account to use. Ensure that this user cannot see any records that are not considered available to all Content Manager users.

NOTE: This feature is optional and this value can be left blank to render this feature inoperative.

SharePoint\System location

NOTE: This section applies only if you intend to use the SharePoint Content Organizer feature.

If you plan to use the SharePoint **Content Organizer** feature, tasks performed by the content organizer present to Content Manager as a user with the account name: **SharePoint\System**

A location must exist in Content Manager for this account. This location must:

- Have a user type of **Contributor** or higher (and have correct permissions as described in the [Permissions](#) section)
- Have the domain specified as **SharePoint** and the account name specified as **System** on the profile tab.
- Be allowed to login to Content Manager

3.4 Determining the protocol and port

3.4.1 Choosing a protocol

The installation creates an IIS site used by the Content Manager Governance and Compliance app. This contains pages, services and resources used by the app as well as all the components that interact with Content Manager.

This site is initially configured to use the HTTP protocol.

It is recommended to use the HTTPS protocol on the app service site. For SharePoint Online installations, the only supported protocol is HTTPS.

There are additional configuration steps required to enable HTTPS. You should determine if HTTPS will be required prior to beginning the configuration process.

3.4.2 Choosing a port

During installation, you will be asked to specify a port that the app service will be installed on. This port must:

- Not in use by IIS (see appendix [Determining ports in use](#))
- Not be in use by another application (see appendix [Determining ports in use](#))
- Be open on any firewalls between the SharePoint farm and the Content Manager farm
- Be open on any firewalls between end users and the Content Manager farm

If you intend to use HTTPS, then the importance of this port is reduced as part of configuration, the site will be switched to port 443. You will still need to enter a port during installation however.

3.5 Installing the Content Manager components

The installation of the Content Manager components is required on each workgroup server in the Content Manager farm. Before you run the MIS, ensure that for each workgroup server [necessary preparation](#) described earlier has been performed.

Run the MSI and provide the following information:

1. Double-click on **CM_SharePointIntegration_x64** msi to install the Content Manager components. A welcome screen is displayed.

NOTE: If you have not completed installing the required components, an error message is displayed. Complete all the pre-requisite installations and re-run the msi.

2. Click **Next**. The License screen is displayed.
3. Accept the license and click **Next**. The Destination folder screen is displayed.
4. Click **Next** to display the Access Site Details.
5. Enter the port number, app pool user account information and the password. Enter the selected account in the format domain\account.

Click **Next**. The job processing service identity screen is displayed.

For more details, see [3.4 Determining the protocol and port](#) and [Application pool account](#) sections.

6. Enter the job service user name and password. Enter the selected account in the format domain\account. Click **Next**.

For more details, see the [Job processing service account](#) section.

The Ready to install screen is displayed.

7. Click **Next**. The update system is displayed.
8. Click **Finish** once the installation is complete.

The **Content Manager SharePoint Configuration tool** icon appears on your desktop.

3.5.1 Configuring the use of HTTPS

If you have elected to use the HTTPS protocol, there are several manual steps that you must perform following the installation process to convert the app service site to use this protocol.

See [3.4 Determining the protocol and port](#) section on how to make this selection.

Enabling https for the site

The installation process creates a web site in IIS with the name “Content Manager SharePoint Server”. By default, this site is configured to use HTTP.

To enable HTTPS for this site, see the [Enabling HTTPS for a site](#) section.

NOTE: Using a self-signed certificate will not be suitable for https on the *Content Manager* SharePoint Server website. You will need to use an existing SSL certificate, or obtain one through a certificate request in IIS.

To disable HTTP for this site, see the [Disabling http for a site](#) section.

Modify the web config files

The web.config file used by the “Content Manager SharePoint Server” site is by default configured for http.

1. Navigate to the installation directory and open the file called “web.config” (notepad is a suitable program for opening this file)
2. Locate all the following nodes (there should be 3):

```
<security mode="TransportCredentialOnly">
```

3. Modify all nodes to read:

```
<security mode="Transport">
```

4. Now locate the node:

```
<add binding="basicHttpBinding" scheme="http"
bindingConfiguration="secureBinding" />
```

5. Modify the node to read:

```
<add binding="basicHttpBinding" scheme="https"
bindingConfiguration="secureBinding" />
```

6. Save the changes to the web.config file.

Testing that HTTPS is correctly configured

If HTTPS is configured correctly, it should be possible to successfully browse to a number of key URLs (replace <YourURL> with the machine name of the Content Manager server or the load balanced URL used for accessing the Content Manager farm).

- https://<YourURL>/Pages/DialogLoader.html (will display the text “working on it”)
- https://<YourURL>/EventReceivers/remoteevents.svc (displays a default service description page)
- https://<YourURL>/SecureServices/DataStoreService.svc (displays a default service description page)

3.5.2 Additional steps for Windows Azure

If installing on a server hosted in Windows Azure, the following additional steps are required.

NOTE: These steps are applicable if using a Windows Azure Managed Cache or a Redis cache.

Update the caching configuration

1. In the installation directory, locate the file: *CacheConfiguration.xml*
2. Open this file (notepad is a suitable application).
3. In the file, locate the following node:

```
<CacheType>AppFabric</CacheType>
```
4. Modify this node to read (dependant on whether using managed or Redis):

- a. <CacheType>WindowsAzureManaged</CacheType>
 - b. <CacheType>WindowsAzureRedis</CacheType>
5. Save the file.

NOTE: In some cases it has been found that after publishing using the configuration tool that this value reverts to AppFabric. If this happens, you will be able to access the app start page but no other pages. You may also see errors in the SharePointIntegration.log file stating **Failed to access app fabric cache**. If this occurs, repeat the steps above to correct the file.

Replace AppFabric assemblies

1. Stop the Windows service: **Content Manager SharePoint Service**.
2. In the installation directory, locate the folder: **WindowsAzure**.
3. Copy all files that are in this directory.
4. In the installation directory, locate the folder: **bin**.
5. Paste the copied assemblies into this directory, overwriting any existing assemblies already in that directory.
6. Start the Windows service after completion of Publish: **Content Manager SharePoint Service**.


NOTE: If you by mistake perform this step and need to revert to the app fabric assemblies, they are available in the AppFabric folder in the installation directory.

3.5.3 Authentication settings for SharePoint Online


Authentication used by SharePoint Online differs to the authentication used by a high trust app used with an on premise instance of SharePoint. The installation process assumes that an on premise instance of SharePoint will be used, so IIS authentication must be re-configured. Perform the following steps:

1. Open **IIS Manager** and select the site: **Content Manager SharePoint Server**.
2. In the right hand pane using the **Features view** locate and double click **Authentication** icon.

Authentication will initially show **Anonymous Authentication** as **Disabled** and **Windows Authentication** as **Enabled**.
3. Right click on **Anonymous Authentication** and select **Enable**.

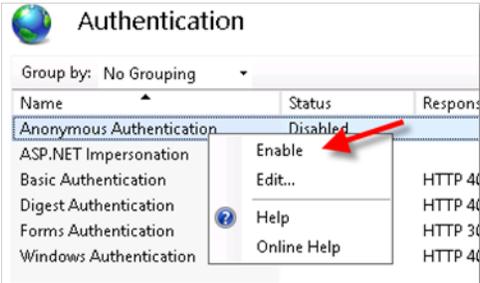

4. Right click **Windows Authentication** and select **Disable**.

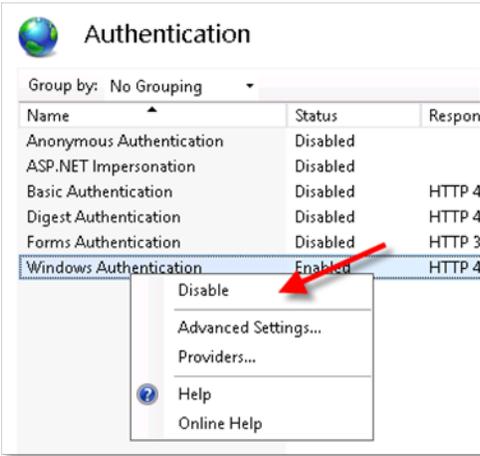


NOTE: Authentication is still performed by the app before granting access to resources.

4 Configuration

Following installation of the product, there are various configuration options that must be set before SharePoint content can be managed. The steps in this section take the environment from one where the product is simply installed, to one where the basic configuration of the environment is complete.

To select a configuration option log into the machine as the [installing user](#), right click **Content Manager SharePoint Configuration** tool available on your desktop and select **Run as Administrator**. Configuration selection window is displayed.

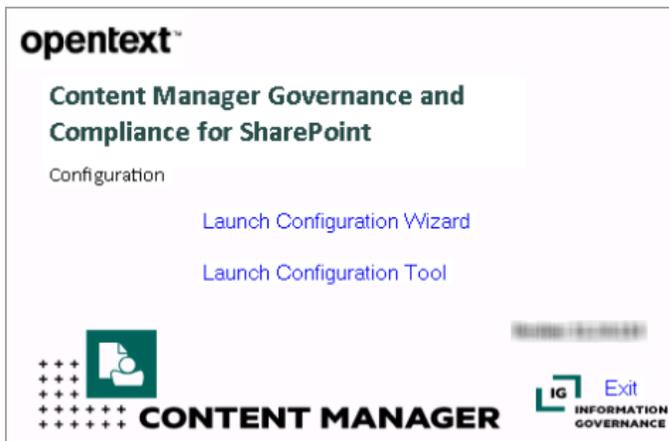

There are two ways of configuring SharePoint Integration:


1. **Using the Configuration Wizard**
2. **Using the Configuration Tool**

4.1 Using Configuration Wizard


The Configuration Wizard will guide you through the configuration steps required to correctly configure the SharePoint Integration.

NOTE: The Configuration Wizard is not supported for upgrades.

1. Run the **Content Manager SharePoint Configuration** tool as Administrator and click **Launch Configuration Wizard** in the selection window. The welcome screen is displayed.

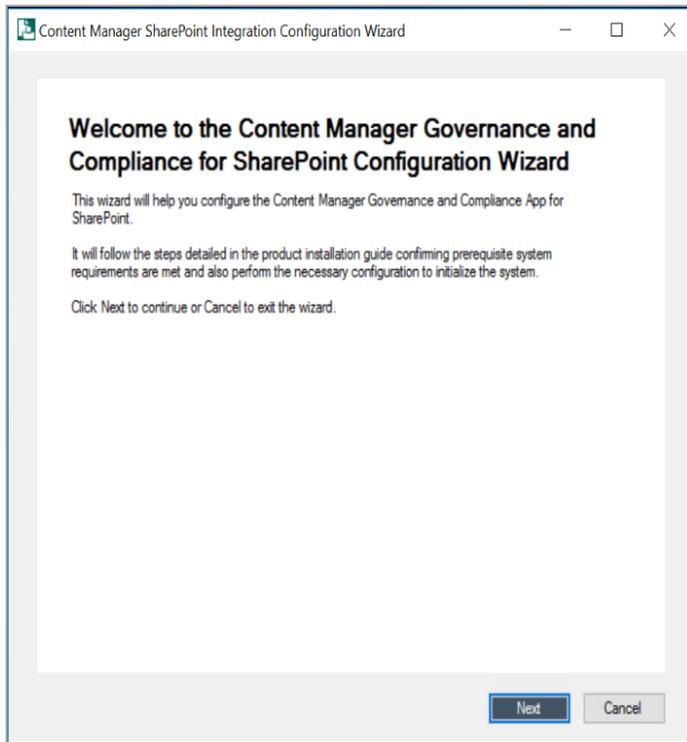


2. Click **Next**. The Pre check window is displayed listing all the prerequisites for the integration. The wizard checks for each prerequisite one by one and displays the status against the list item. Once the pre check is complete, the **Next** button is enabled.

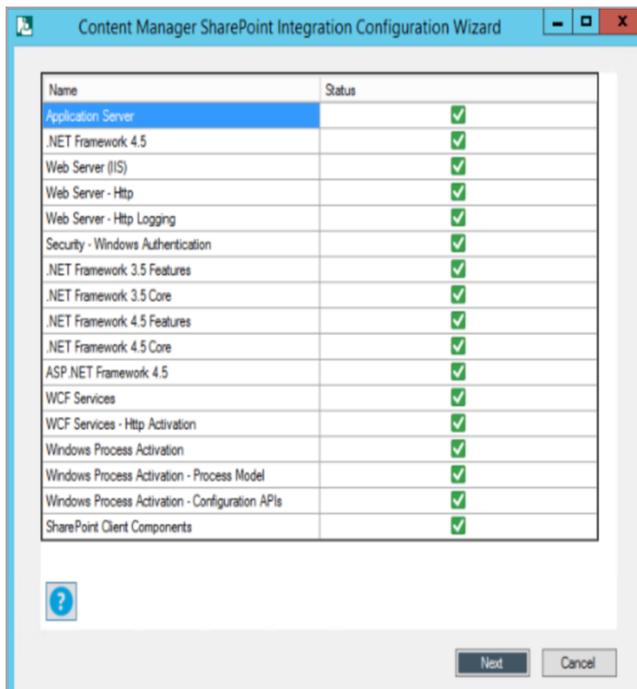

For more information on prerequisite configurations, see [3.1 On Content Manager server, on page 20](#).

3. Click **Next**. The **Content Manager Farm details** window is displayed.
4. Select from the drop down whether you want to create a new Content Manager farm or join existing one or use the current farm.
 - a. If you are creating new Content Manager farm, enter the SQL Server Instance and name for the Content Manager farm database in the **Create a new Content Manager Farm** window.

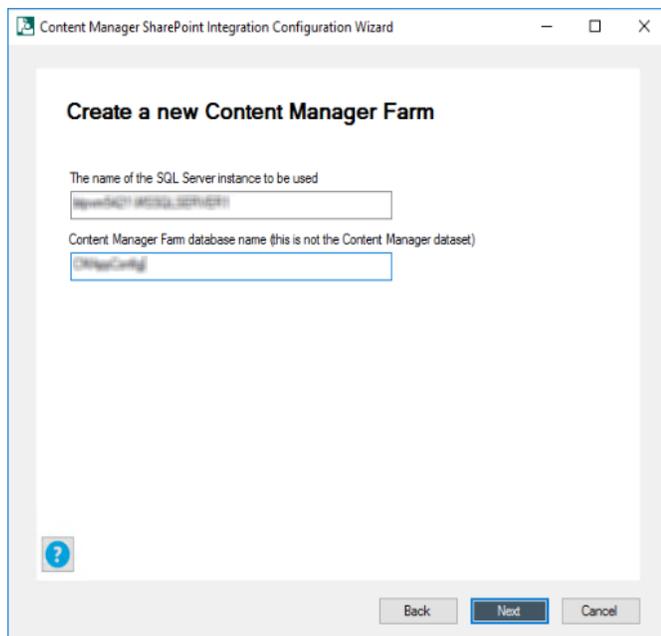

Click **Next**. The **Cache Details** window is displayed.

- b. if you are joining the existing farm, enter the server name, database details and test the connection in the **Join an Existing Content Manager Farm > Data Link Properties window**.

Click **OK** and then click **Next**. The **Cache Details** window is displayed.

- c. If you are using the current farm, the **Cache Details** window is displayed.
5. Select the type of cache that will be used by Content Manager farm from the drop down and click **Next**.

For details on various cache configurations, see [B: General administration tasks, on page 121](#).

The **SharePoint Configuration Result** window is displayed.

6. Select the SharePoint instance being configured from the drop down and click **Next**.

The **Tenant Information** window is displayed.

7. You can add a new tenant or edit existing one based on whether you have created a new Content Manager farm or using the existing / current farm.

a. **For new Content Manager farm**

If you have created a new Content Manager farm in [step 4](#), then in the **Tenant Information** window, you get option only to add a new tenant.

Select **Add new Tenant** from the drop-down and click **Next**. The **Content Manager Farm URL** window is displayed. Go to [step 8](#).

b. **For existing farm or using current farm**

If you have joined an existing farm or using a current farm, then in the **Tenant Information** windows, you also get an option to Edit an existing tenant information. Perform one of the following steps:

i. **Add new Tenant**

If you select this option from the drop-down, click **Next**.


The **Content Manager Farm URL** window is displayed.

ii. **Edit existing Tenant**

If you select this option from the drop-down, the **Choose Tenant** window is displayed. Select an existing tenant from the drop-down and click **Next**.

The **Content Manager Farm URL** window is displayed.

8. Enter the Content Manager load balanced URL and click **Next**. The **Configure SharePoint for Apps** window is displayed.

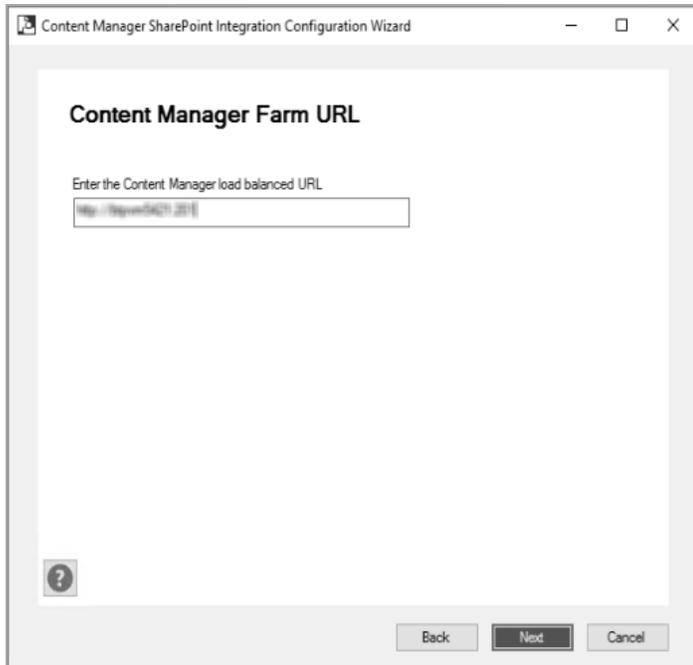


9. Select **Yes** or **No** based on whether the SharePoint instance has already been configured or not and click **Next**. The **Default Site Collection** window is displayed.

10. Enter the default site collection URL and click **Next**. For more details, see [3.2.2 Identify the default site collection, on page 31](#).


11. Ensure the following manual steps are completed:

- a. Copy the script and certificate files from Content Manager manager to a folder on the SharePoint server.


Click **Next** if you have already copied the files.

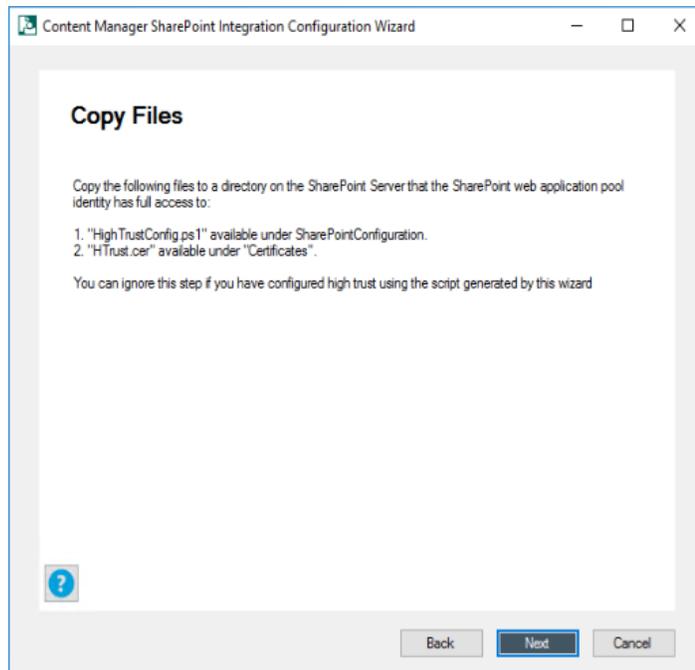

- b. On the SharePoint server, run the script copied from Content Manager. This script generates a .xml file. Click **Next**.

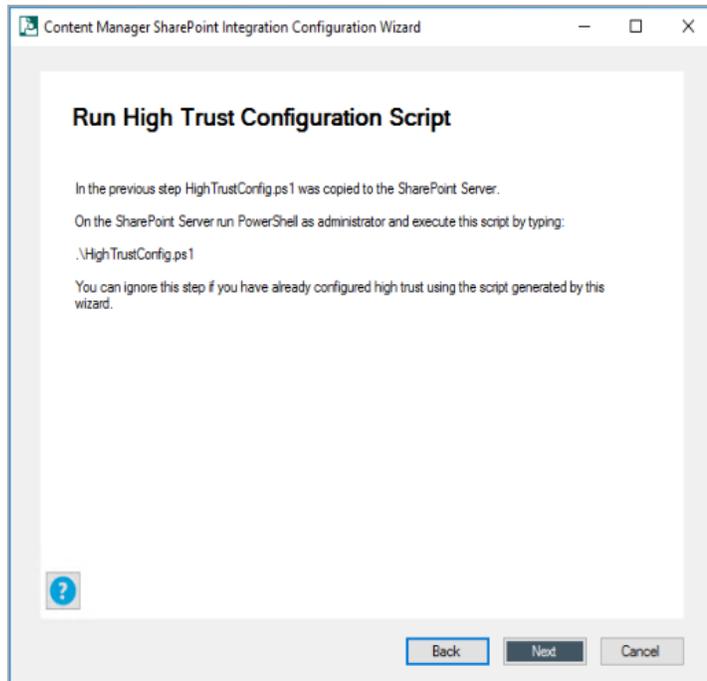


- c. Copy the .xml file to the Content Manager system. Click **Next** if you have already copied the files. The **Configure SharePoint Site User Experience** window is displayed.

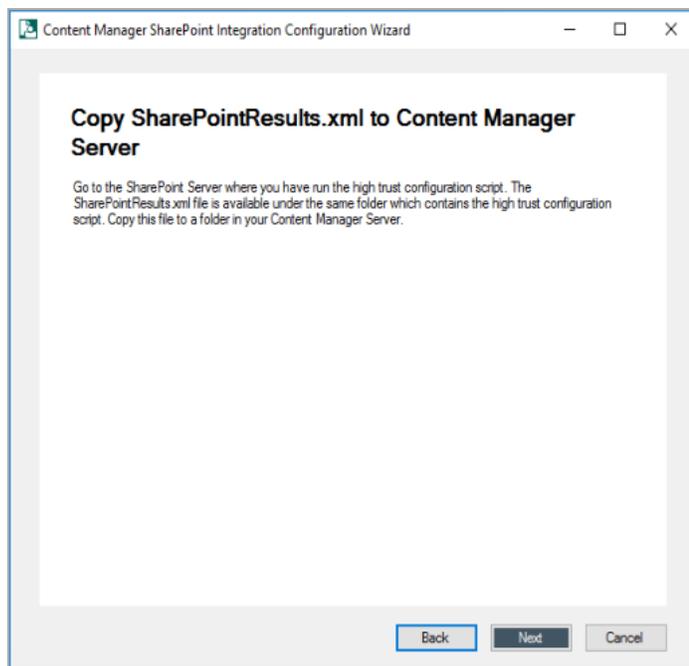


For more information, see [3 Initial Setup and Installation, on page 20](#).

- 12. Select the SharePoint Site User experience (**Classic** or **Modern**) from the drop down and click **Next**. The **App Identifier** window is displayed.

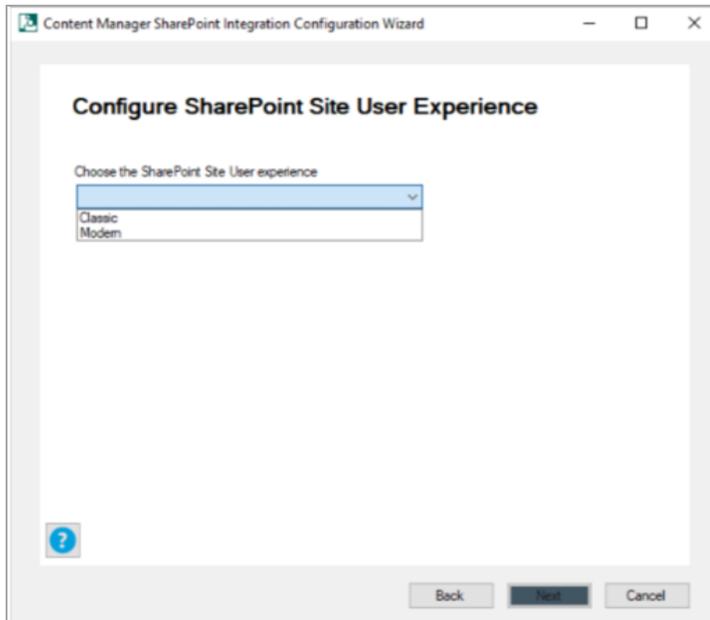

13. Generate the App ID using the link and copy paste the ID in App ID field. Click **Next**.

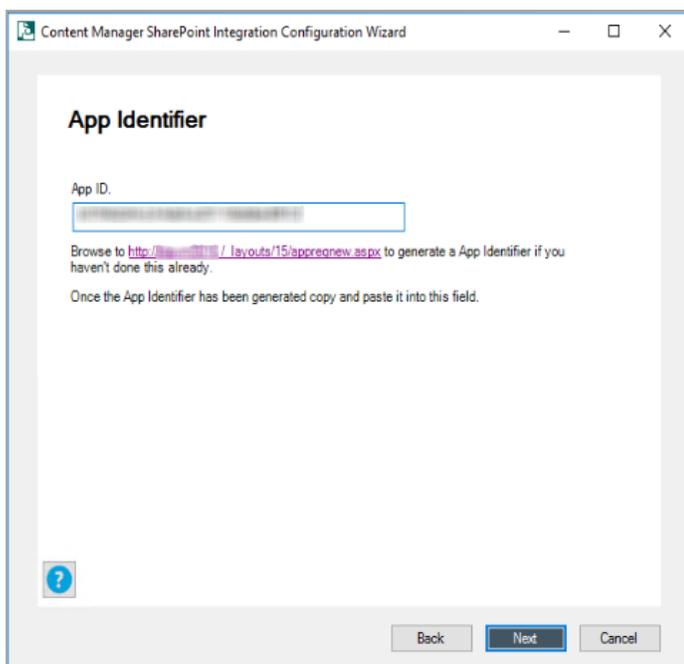

The **SharePoint Configuration Results** window is displayed.

Register the app in SharePoint system

Before uploading an app to the corporate app catalog, it must be registered with SharePoint first. This process provides an “App ID” that will be used later in the configuration process.

Registration is performed using the SharePoint “appregnew.aspx” page. To access this page, navigate to the following URL where [site collection URL] is the full URL to the root of your default site collection:

[site collection URL]/_layouts/15/appregnew.aspx

For example, if the site collection URL was http://SharePoint, then the URL of the appregnew page would be:

http://SharePoint/_layouts/15/appregnew.aspx

For both SharePoint on premise and online



Using the appregnew page, generate an **Client Id** and **Client Secret** by clicking on the **Generate** buttons.

Take a copy of the generated **Client Id**, as this will be required in a later step.

NOTE: From SharePoint version 2016 onwards, **App ID** and **App Secret** are referred as **Client ID** and **Client Secret**, respectively.

Specify “Content Manager Governance and Compliance” for the **Title**.

App domain:

For on premise, specify your **App domain** i.e. the domain that the app will be used in.

For Sharepoint Online, The **App domain** should be Content Manager Farm domain. For example, if the Content Manager farm URL is **https://service.mydomain.com**, then the App Domain to specify is **service.mydomain.com**.

For the **Redirect URI**, you must specify the full URL of the app start page. This will be the Content Manager farm URL with the following appended:

/pages/appstart.aspx

For example, if the Content Manager farm URL is:


https://service.mydomain.com

Then the full URL to specify in the Redirect URL will be :

https://service.mydomain.com/pages/appstart.aspx

After entering all the details, click **Create** to register the app in your environment.


14. Enter the full path to the .xml file you copied on to the Content Manager system and click **Next**.

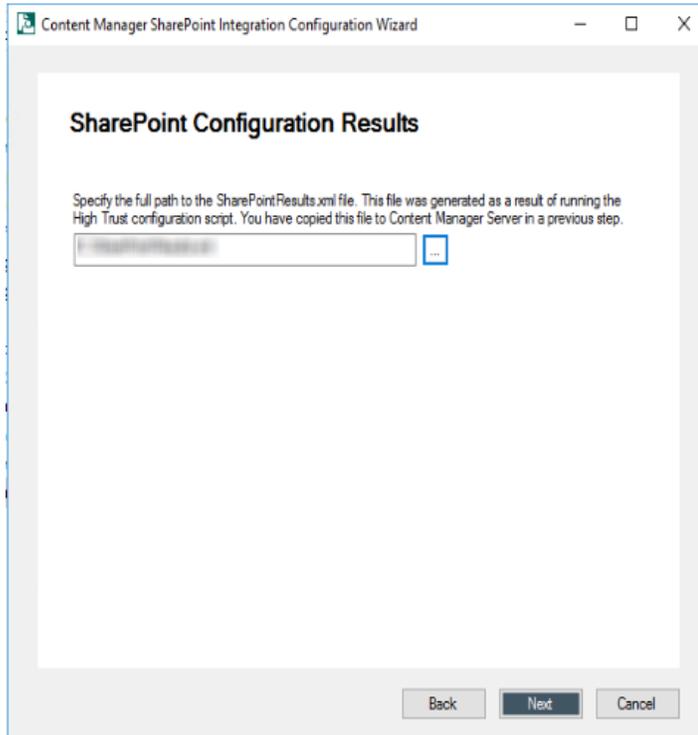

NOTE: If you are using existing tenant (see [Edit existing Tenant, on page 46](#)), only then a check box with the option **Fetch Issuer ID from stored configuration** is displayed. Select the check box to fetch the issuer ID. The option to enter the path for the .xml file is disabled.

The **Set the Protocol to use** window is displayed.

15. Select the type of protocol to use for communication between Content Manager and SharePoint and click **Next**.

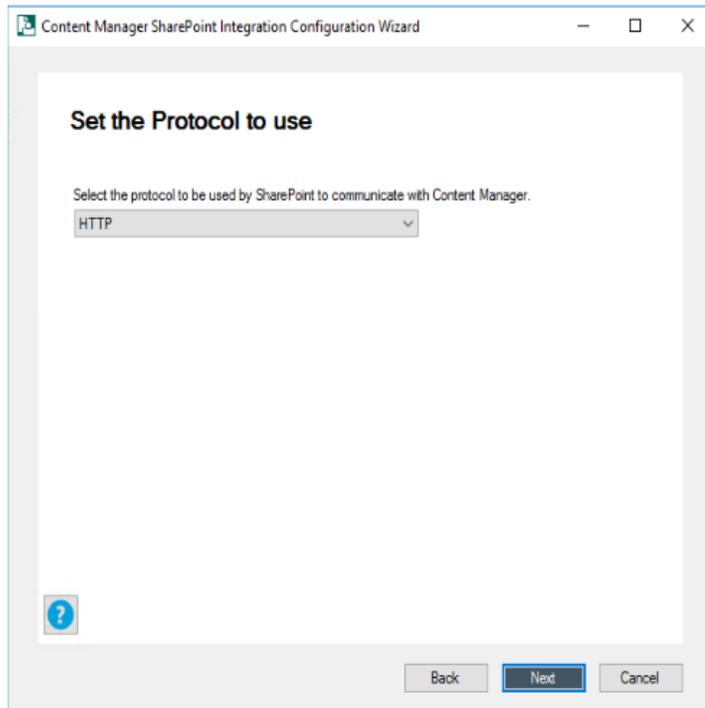


For information on enabling and disabling HTTPS, see [HTTPS, on page 131](#).

The **Auto Install App** window is displayed.

16. Select **Yes** from the drop down to automatically install the **Content Manager Governance and Compliance App** to the default site collection and click **Next**.

If you have already installed the **Content Manager Governance and Compliance App**, select **No** from the drop down and click **Next**.


17. Enter the app catalog URL and click **Next**.

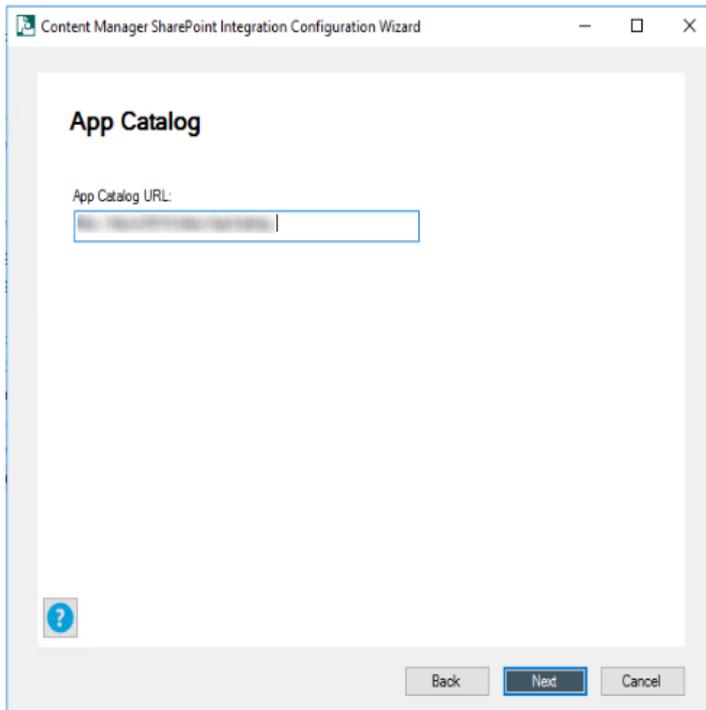

If you have selected **No** in [Step 15](#), proceed with next step. Else, go to [Step 19](#).

For information on identifying app catalog, see section [Identifying the app catalog in use, on page 140](#).


18. On the SharePoint System, manually, upload the **Content Manager Governance and Compliance App**. Click **Next**.

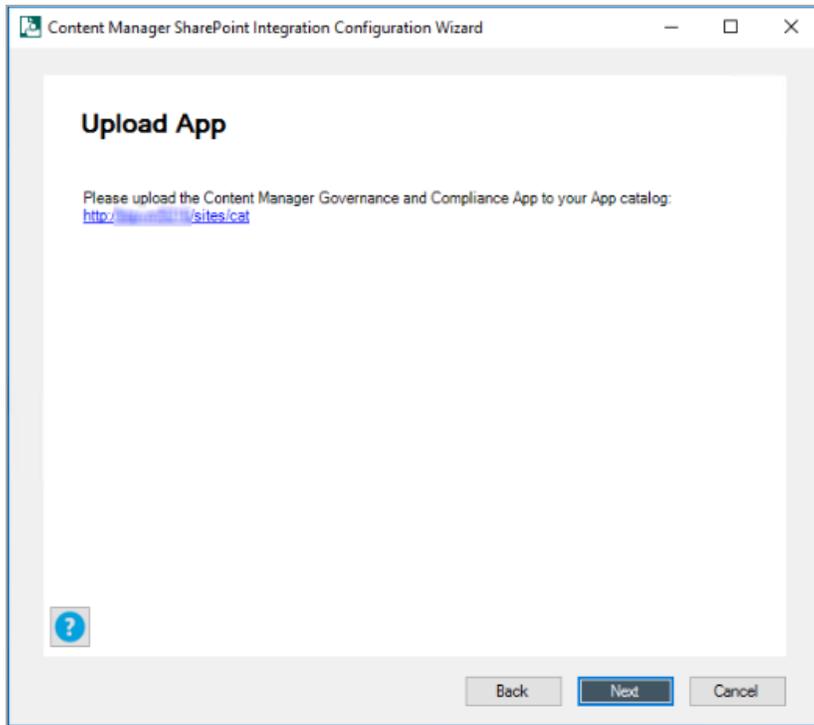


Upload the app to the corporate catalog in SharePoint system

These steps describe how to add the Content Manager Governance and Compliance app to the corporate app catalog.

- a. Navigate to the corporate app catalog used by your SharePoint farm.
- b. Click the “Apps for SharePoint” link.

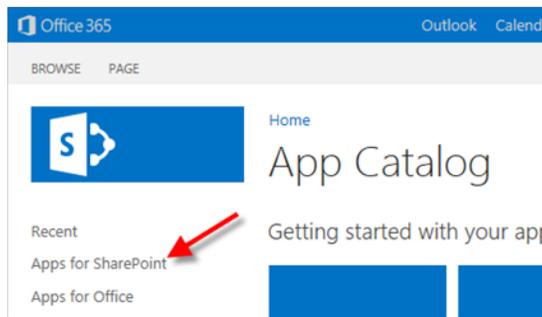

- c. Click the “upload” link.

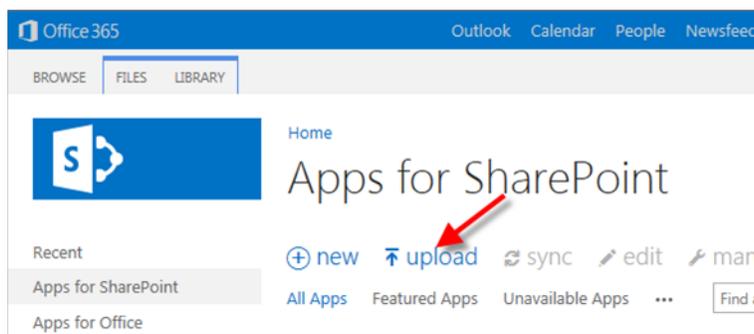

When prompted, select the app file to upload. The app file created in the previous step can be found in the installation directory of Content Manager for SharePoint. By default, this directory is:

[Program Files]\Micro Focus\Content Manager\Content Manager SharePoint Integration

The app file name is:

HPRMGovernanceCompliance.app


During upload, you will be prompted to enter metadata for the app. Entry of this information is optional, however, entering the URL of the image to display for the app is recommended.

The URL will be:


<Content Manager Farm URL> + “/Images/AppIcon.png”

 A screenshot of a metadata form for an app. The 'Icon URL' field is labeled 'Type the Web address: (Click here to test)' and contains the text 'http://localhost:201/Images/AppIcon.png'. Below it is a field for 'Type the description:' which is empty. A note below the description field states: 'The URL to the app icon. The icon should have a width and height of 96 pixels.'


d. Clicking **Save** on this form will complete the addition of the app into the app catalog.

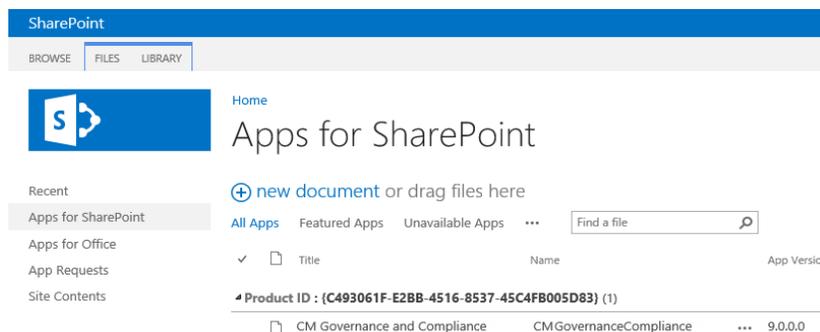

19. Add the **Content Manager Governance and Compliance App** to the Default site collection. Click **Next**.

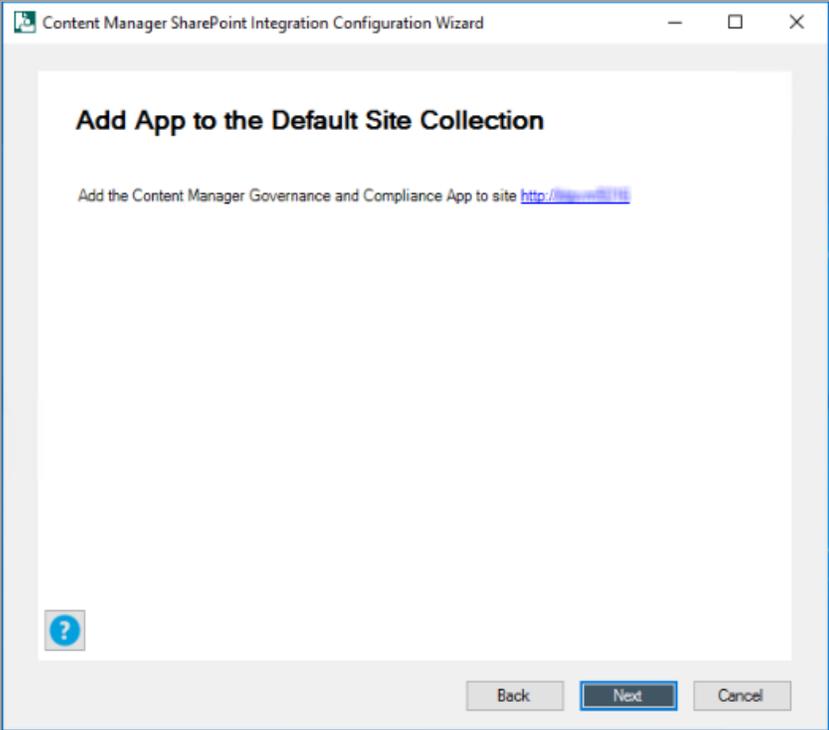


The **Content Manager Governance and Compliance App** installation is validated.

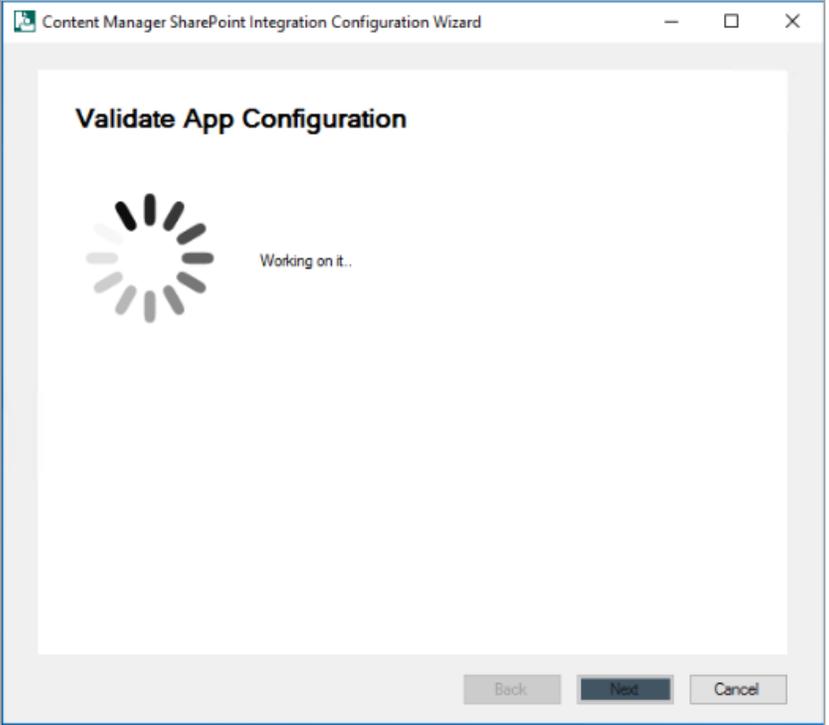


Add the app to the default site collection in SharePoint system

The app must be added to the site collection that has been selected as the [default site collection](#).


- a. Navigate to the root of the default site collection, then to **Site Contents** for the site collection. On this page choose the **add an app** link.

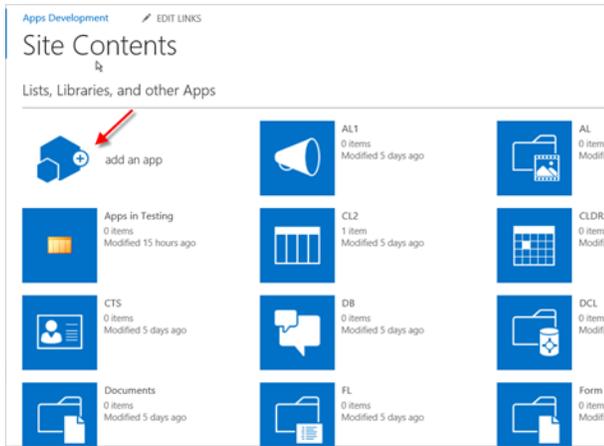


- b. On the apps page, choose either of the links **Apps You can Add** or **Apps from your Organization** and select the **Content Manager Governance and Compliance** app from the list.

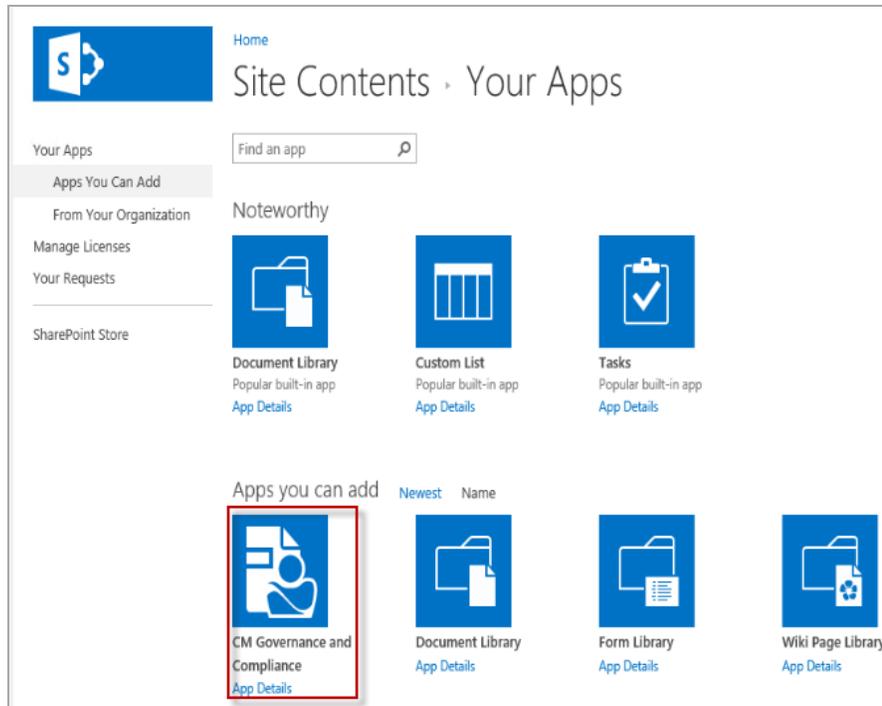


- c. Click **Trust It** to allow the app to be added.

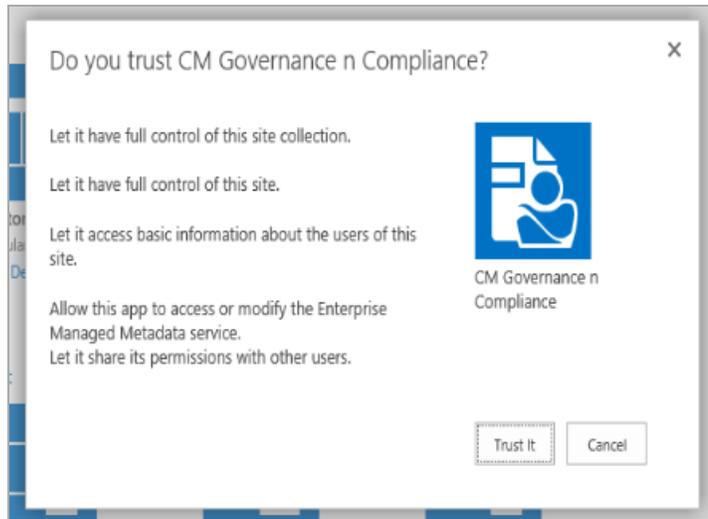

You will see the app added to the site contents and initially in a state where it is being installed. Once installed it will appear as follows on the site contents page.

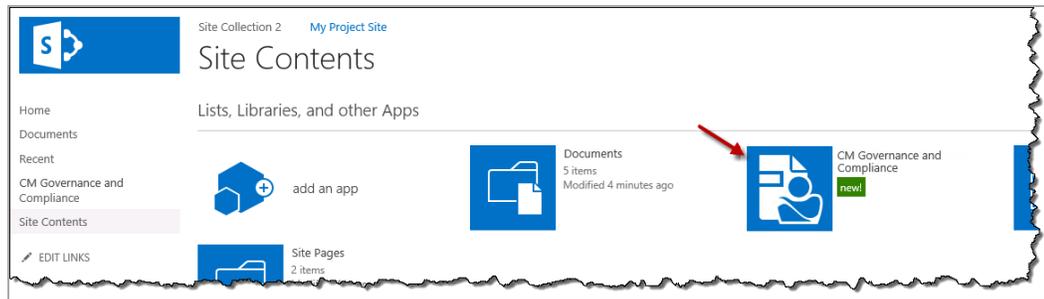


20. Once the installation and validation of **Content Manager Governance and Compliance App** are complete, you may choose to enter email settings.

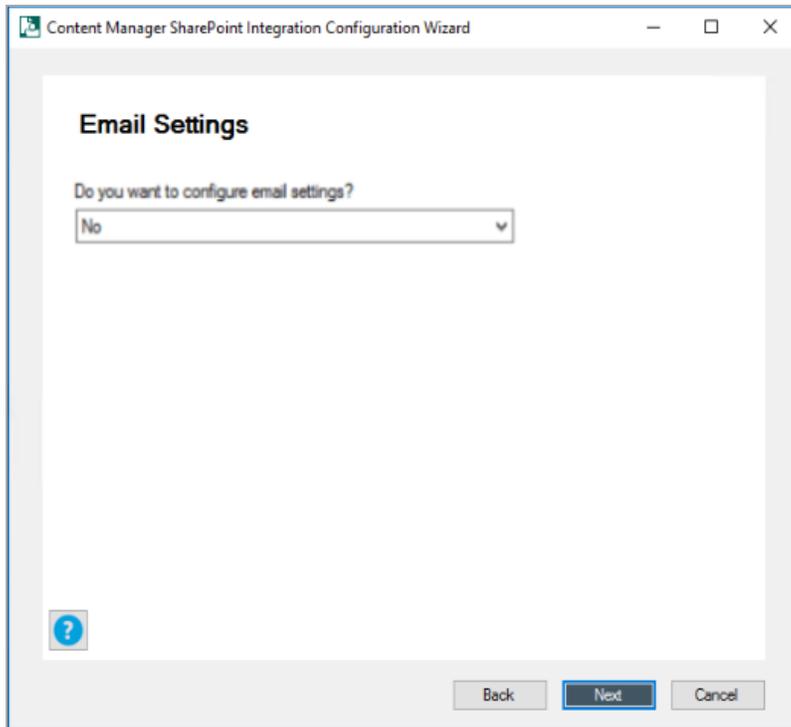


If you are going to configure email at later stage, select **No** in the drop down, click **Next** and proceed to next step.

Otherwise, continue by entering the **SMTP server name** and **Reply to address**. Click **Next**.

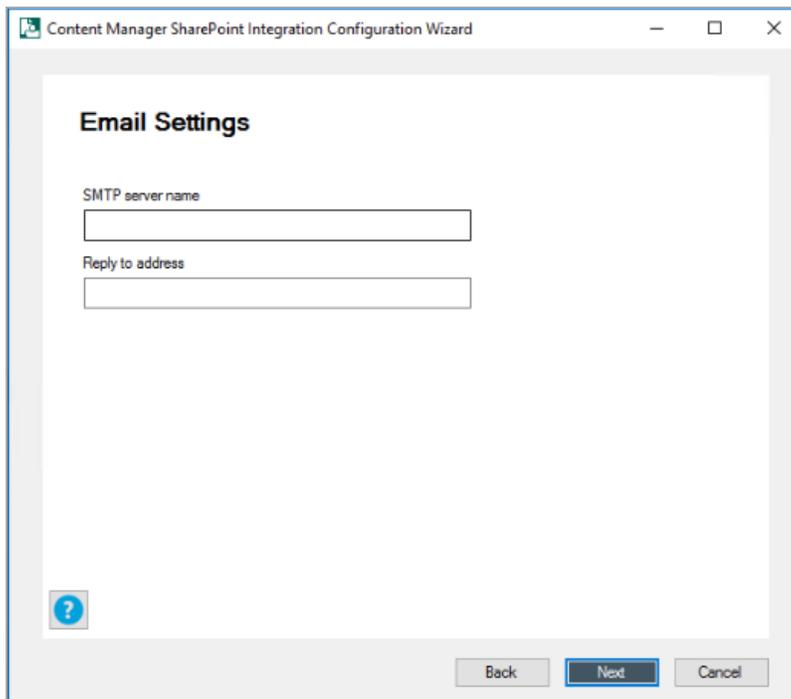


The **Primary Configuration Administrator** window is displayed.

21. Enter an account to use as the primary configuration administrator and click **Next**.
The settings are published. Click **Next**.

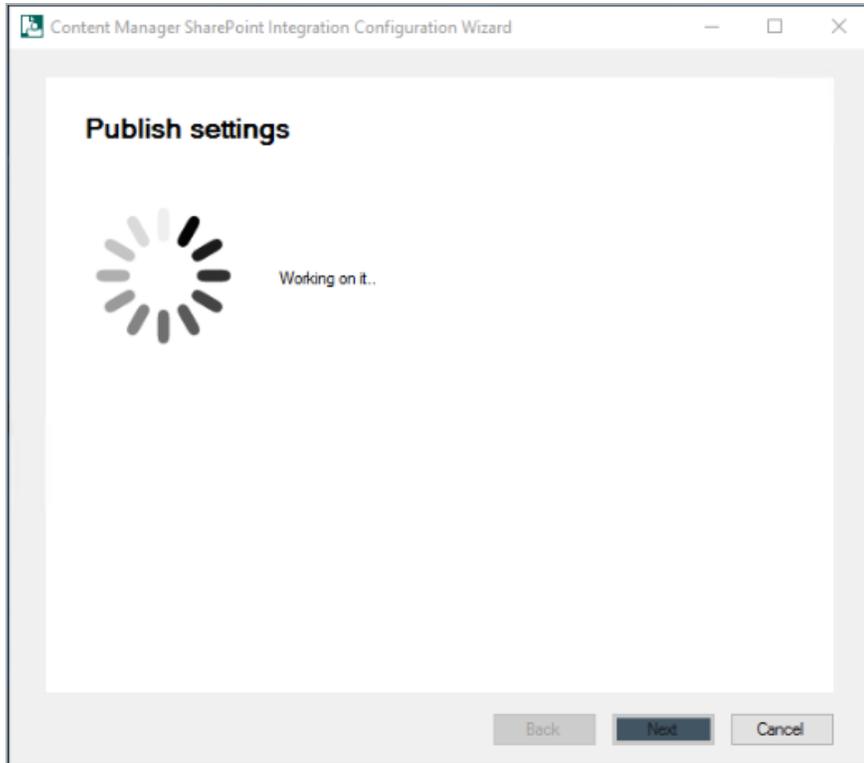

22. Enter the Content Manager dataset ID and click **Next**.

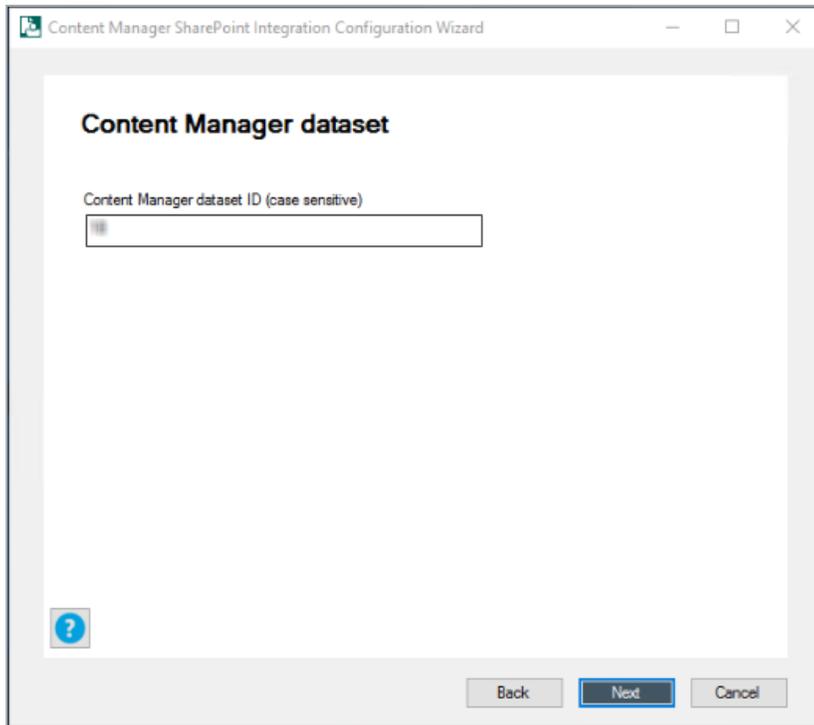

NOTE: Ensure to enter the dataset ID created while creating or registering the dataset in **Content Manager Enterprise Studio**.


Once you enter the dataset ID and click **Next**, the service locations are created in Content Manager.

23. Ensure the following manual steps are completed:


If you have already performed these manual steps, click **Next**.

- a. Add the App Pool User account and the Administrator account as trusted server accounts in Content Manager system.

For more details, see [3.1.6.3 Add trusted server accounts, on page 24](#).

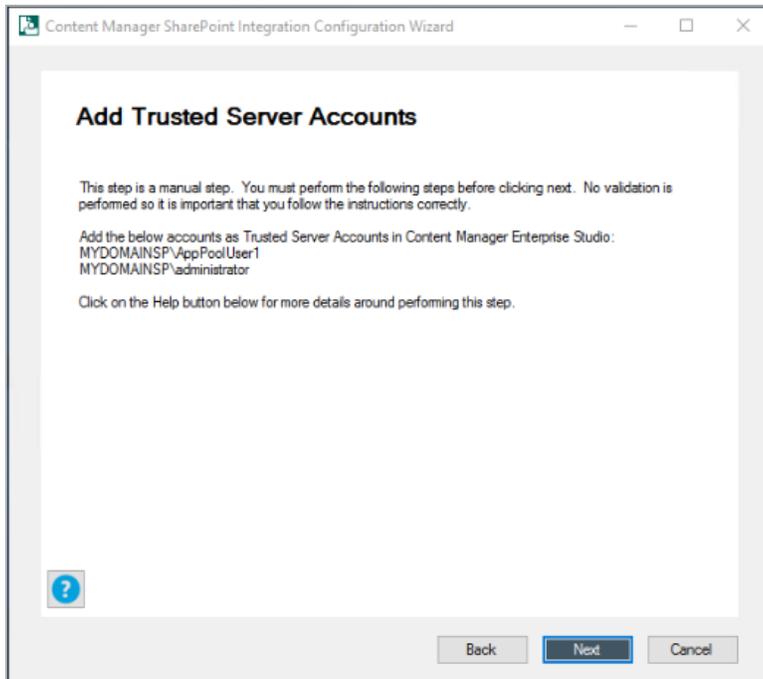

- b. Enable the event processing in Content Manager. For more details, see [3.1.6.6 Enable event processing, on page 27](#).
- c. Join a SharePoint farm. For more details, see [3.1.6.5 Add to a SharePoint farm, on page 26](#).
- d. Enable the **Content Manager SharePoint integration** and **SharePoint Zero FootPrint** features. For more details, see [3.1.6.4 Enable Content Manager features, on page 25](#).
- e. Prepare the document record type for SharePoint items.

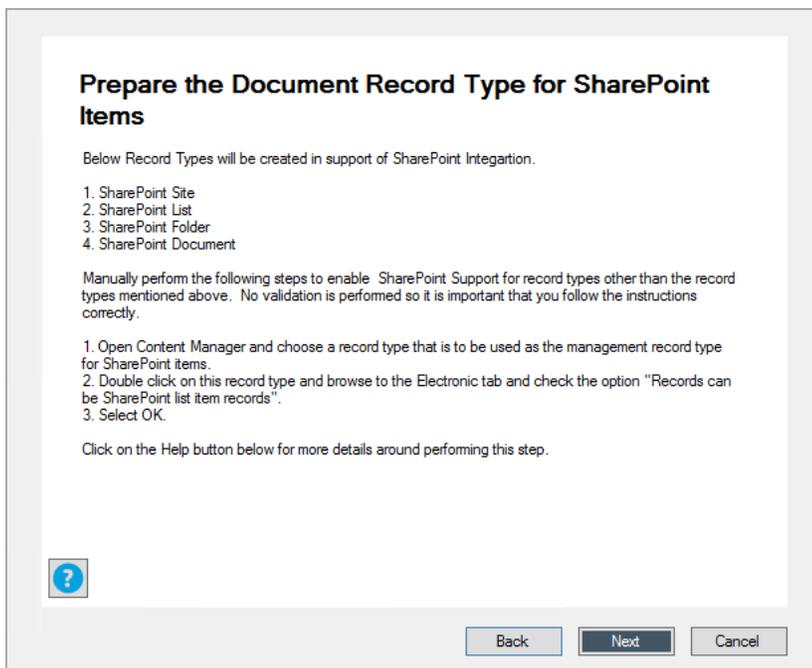


This step is now automated. If you click **Next**, the record types - **SharePoint Site**, **SharePoint List**, **SharePoint Folder**, and **SharePoint Document** - required for SharePoint integrations will be created in Content Manager.

You can also follow the manual steps given on the page to create the record types in Content Manager.


For more details, see [Prepare record types, on page 136](#) in Appendix B: General administration tasks.

- f. Create Content Manager term set group.

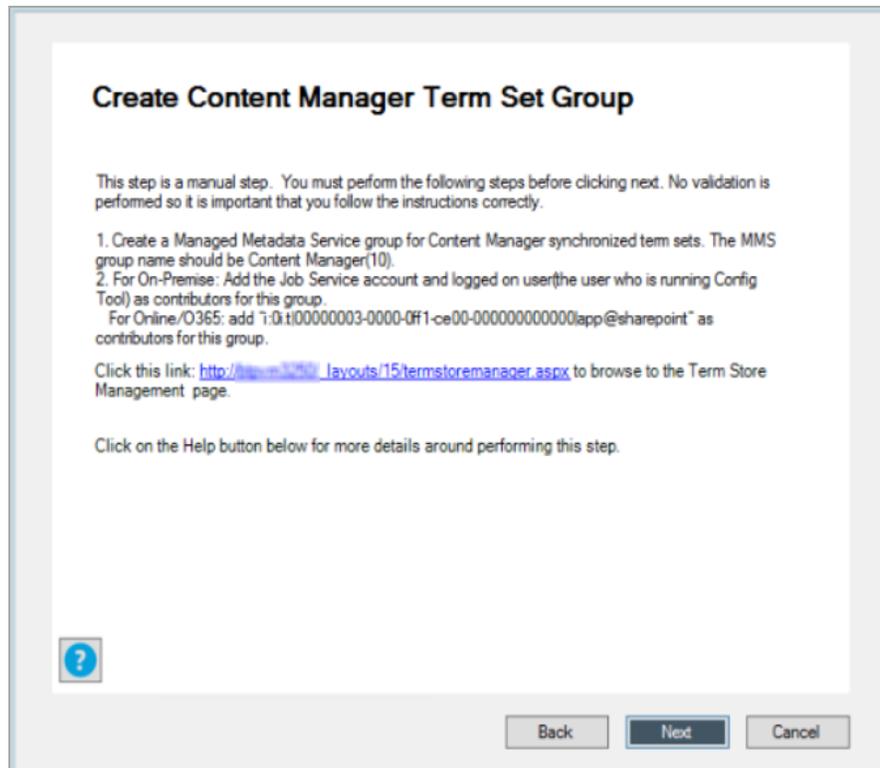


For details, see [Working with the term store, on page 142](#).


- 24. Click **Next**. The **Do not Create Classification terms** window is displayed.
- 25. Select the check box if you do not want to create classification terms. Click **Next**.

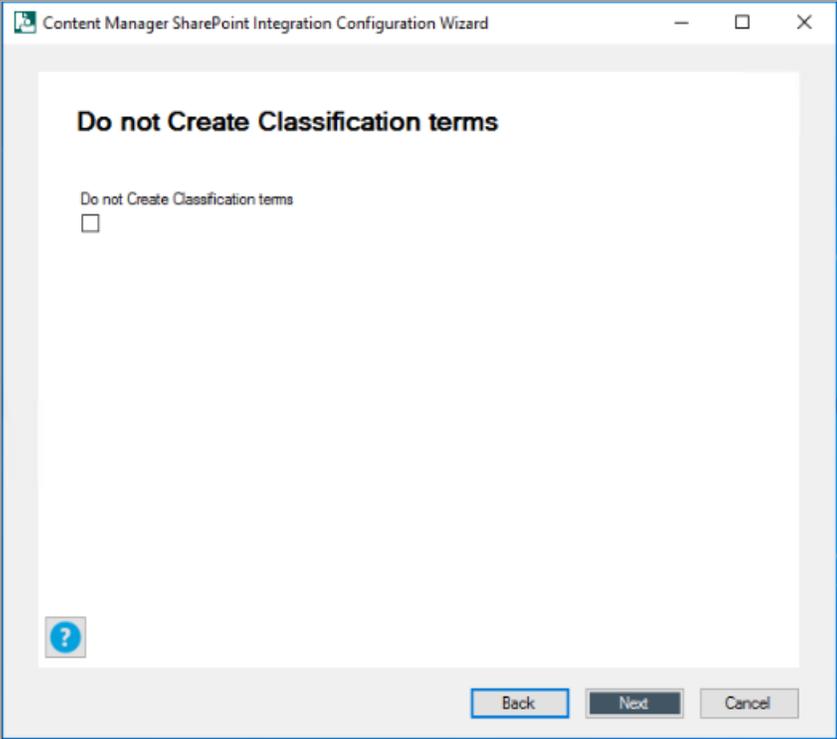

26. This step to choose the record type is automated. By default, the standard SharePoint record type gets configured. However, you can also configure the record types manually. Follow the instructions given to manually configure the record types as needed. Click **Next**.

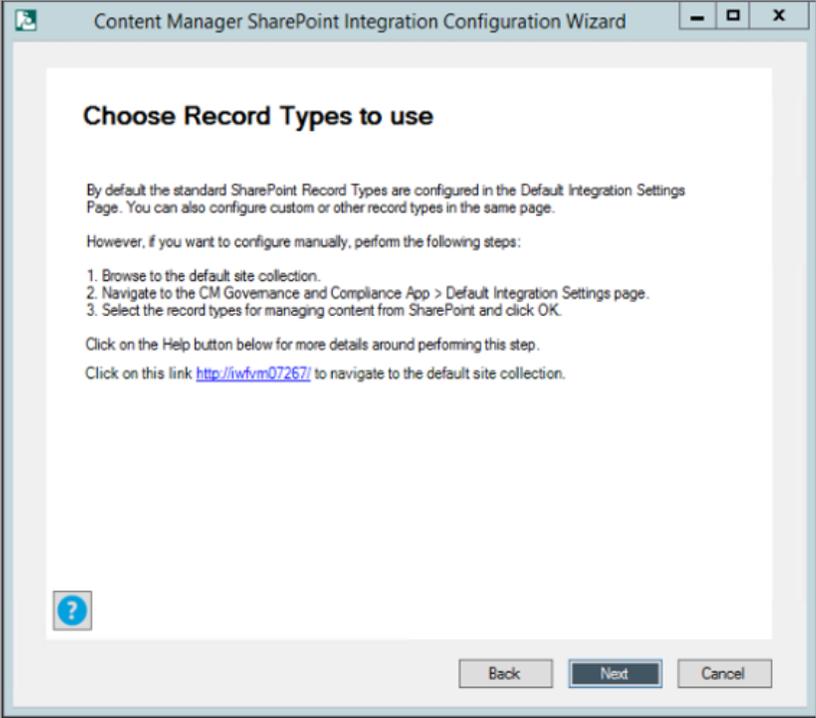


The termsets created in the SharePoint system are mapped with the metadata in dataset created or registered in the **Content Manager Enterprise studio**. For details on creating term sets, see [3.2.4 Creating Content Manager term sets, on page 34](#).

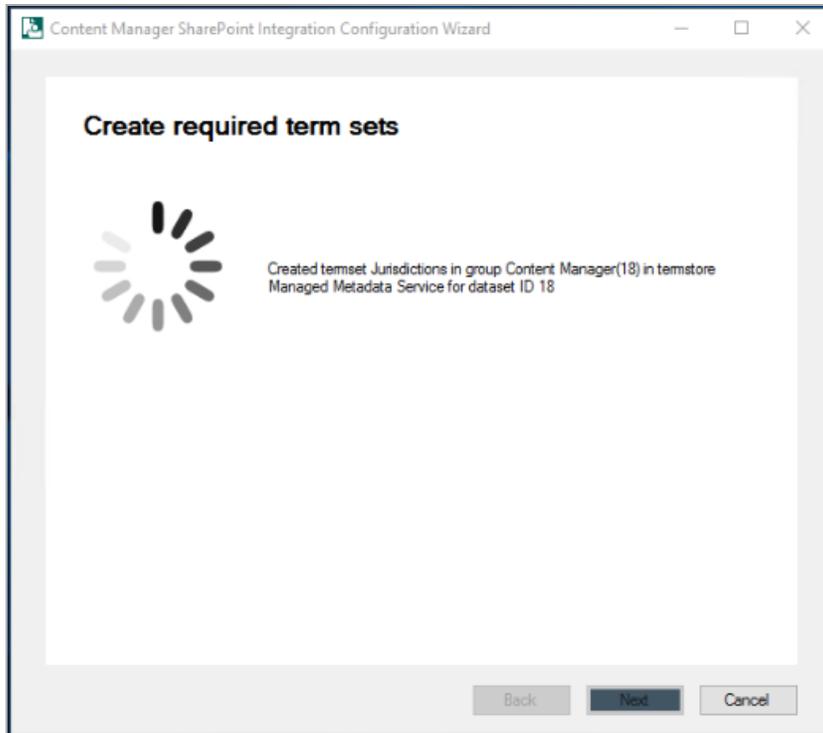

Once the termsets are created, the Content Manager site columns are also configured for the site collection.

27. The **Configuration Complete** window is displayed with a status message. Click **Finish**.

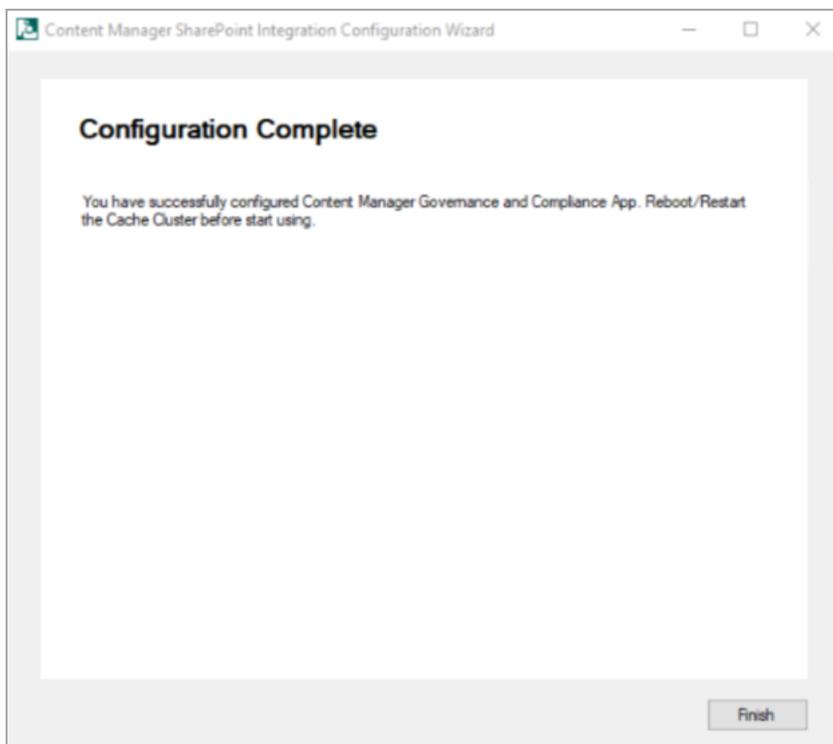

4.2 Using Configuration Tool

The Configuration Tool allows modification to existing configuration data and should be used once the Configuration Wizard has been used to create the initial configuration.

For more advanced configuration options, see *Content Manager Governance and Compliance SharePoint App: User Guide*

Right-click the **Content Manager Sharepoint Configuration** Tool on your desktop and run as administrator to configure the SharePoint integration. Ensure to log in as installing user.

CAUTION: The use of system accounts to configure the SharePoint Configuration Wizard is prohibited, as the tool cannot override the admin/system accounts. Use the job account to login into the system, and then run the SharePoint Configuration Tool as run an administrator. Note that, this restriction is applicable only when running the Configuration Wizard. When running the Configuration Tool, an admin/system account can be used.


The Configuration Tool consists of two main tabs: **Configuration** and **Tenant Settings**. The details in these tabs are automatically filled when you run the Configuration Wizard. You can view and modify the information. The following are the details of each tab in the Configuration tool:

NOTE: Make sure to publish once you have modified any of the information using the Configuration Tool. See [Publish](#).


1. **Configuration** tab: includes **Farm**, **Workgroup**, **Caching** and **Admin Tasks** tabs.

- a. **Farm** tab: This tab includes the details of Content Manager farm database used for SharePoint management. Also includes information on **Content Manager Farm database connecting string** and **Content Manager Farm URL**.


In this tab, you can create new database by providing **Database server name** and **New database name**. You can click the ellipses and modify the **Join existing Farm** details. The **DataLink Properties** dialog box is displayed. Enter the SQL server details, database details, and test the connection. Click **OK**. The **Content Manager Farm Database connecting string** is generated.

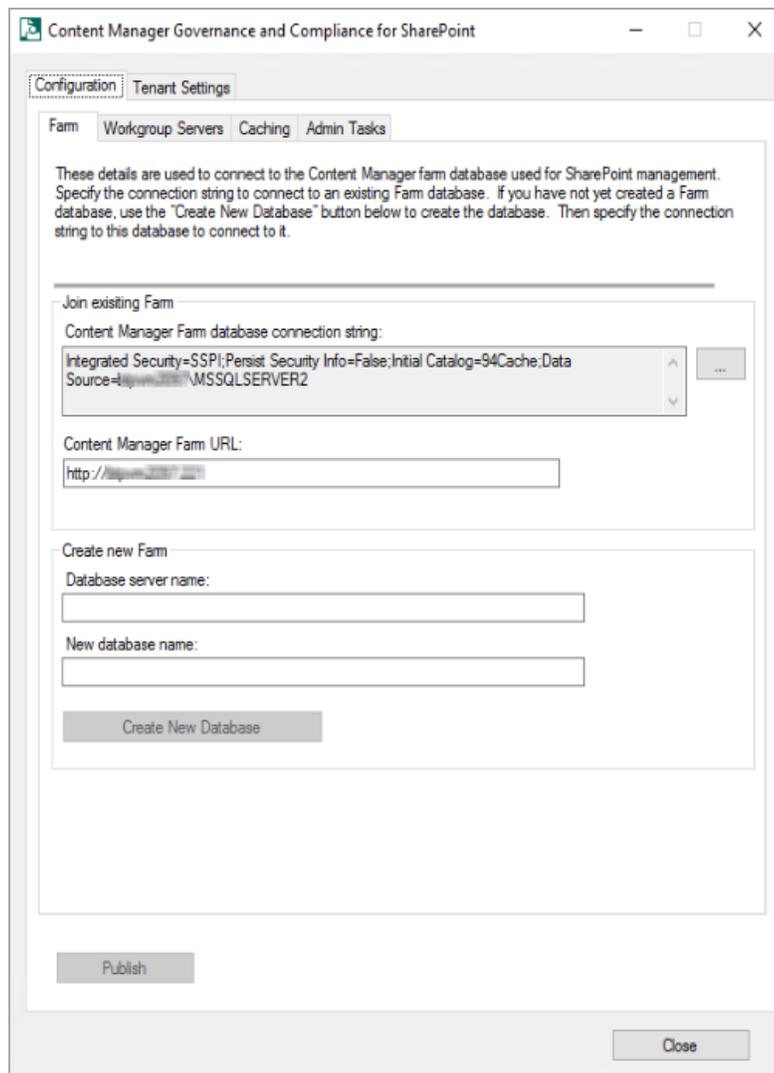

- b. **Workgroup Servers** tab: This tab lists the details of workgroup servers in the farm. In this tab, you can add new workgroup servers to the farm, modify server details of the existing workgroup servers in the farm or remove the workgroup servers from the farm.

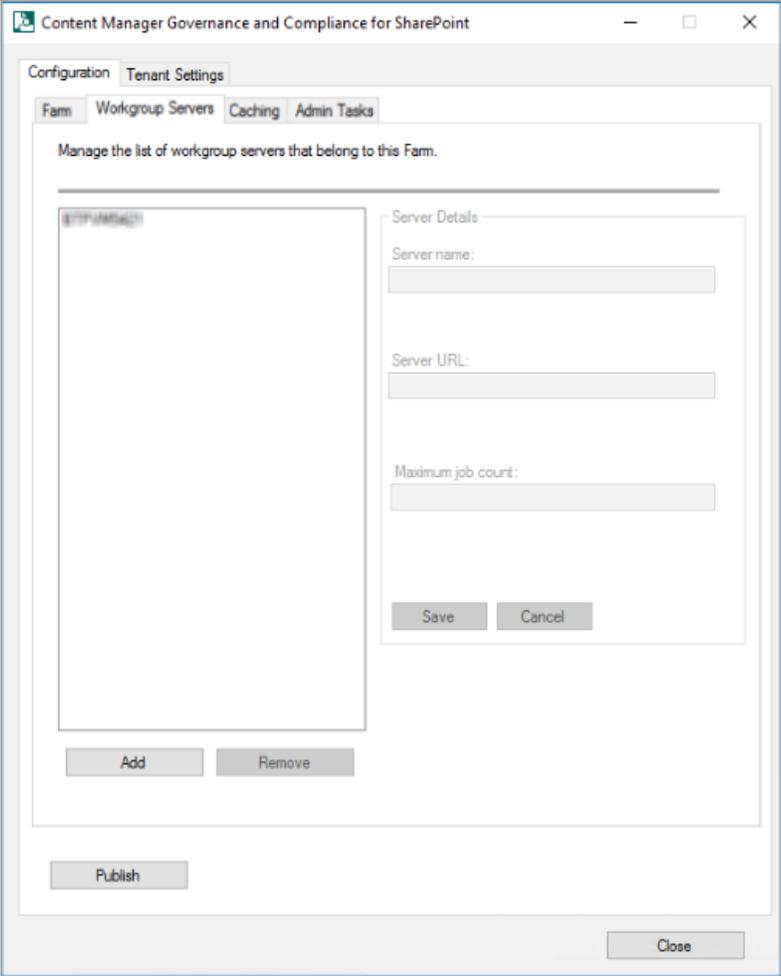

c. **Caching** tab: In this tab, you can modify the caching settings.

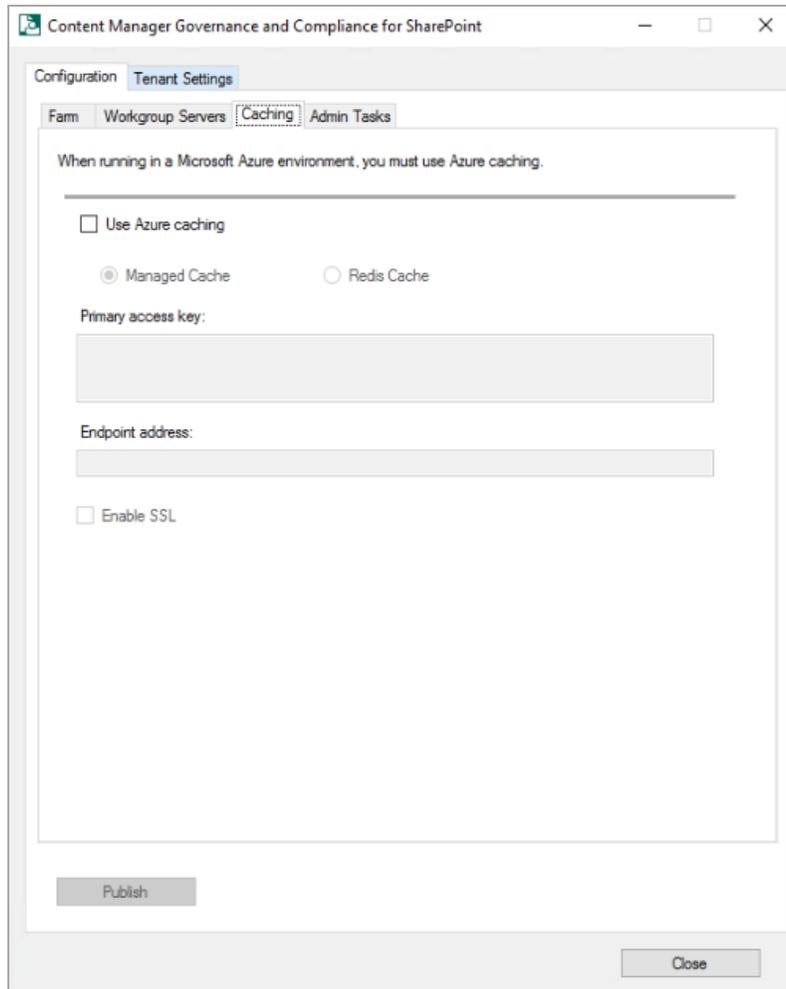


If Content Manager is later on hosted on Windows Azure environment, then set the caching option in the Caching tab. Check the **Use Azure caching** check box and select the type of **Azure caching**:

- **Managed** or **Redis**.

Check the **Enable SSL** check box if the cache is configured to be accessed through SSL. To determine if this value is required see [Determining if the Azure cache is configured to use SSL](#).


Enter the details of the Azure cache into the Primary access key and Endpoint address fields.

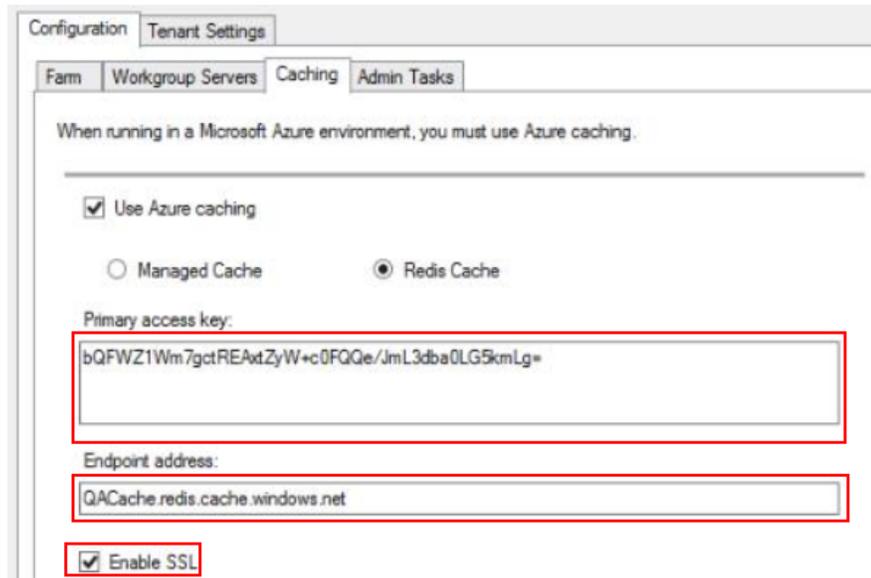

For more details, see [Azure cache](#).

- d. **Admin Tasks** Tab: This tab lets you create default Record Type and locations for the given Dataset ID.
 - i. Record Types - SharePoint Document, SharePoint Folder, SharePoint List, and SharePoint Site are the default record types that will be created. If the record types already created, then they will be enabled to support SharePoint list item records.
 - ii. Locations - The service accounts will be added as Administrator in Content Manager. The AppPoolUser and Job Service accounts will be added to different groups like, IIS users and Performance monitor users groups.


Enter the **Dataset ID** and click **Create Default Record Types** and/or **Create Service Locations** to create default Record Type and locations.

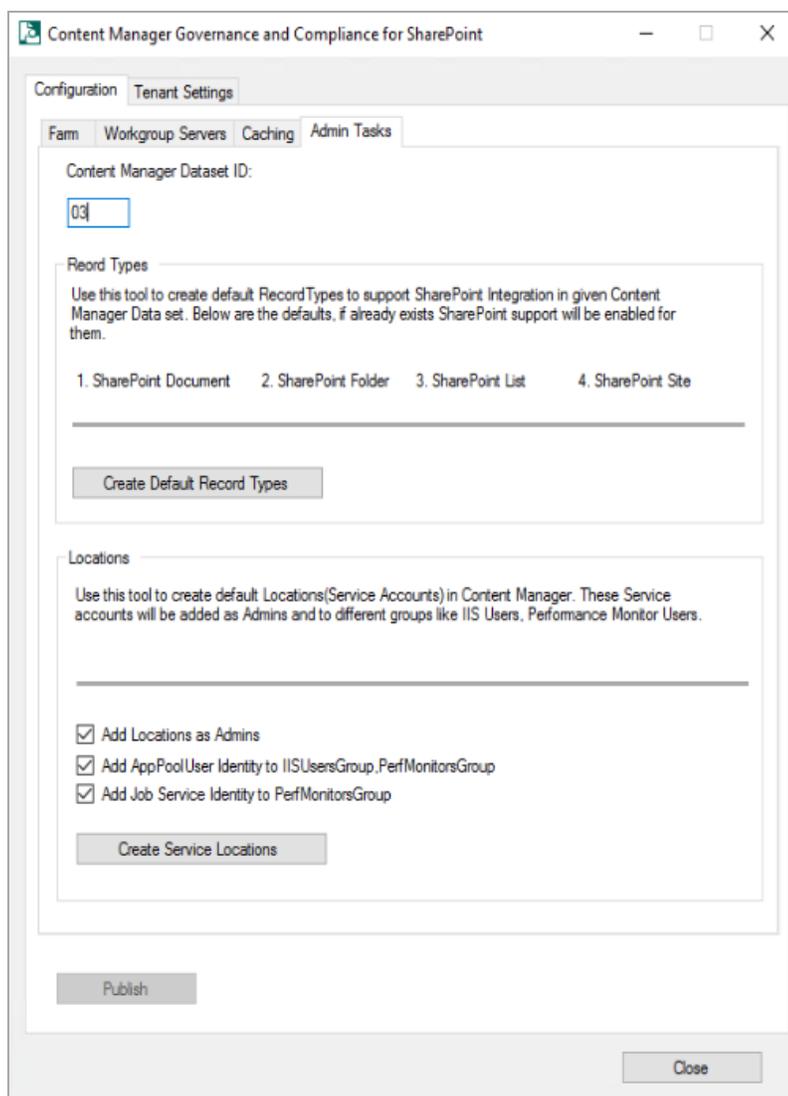

For more details, see [Prepare record types, on page 136](#) and [B: General administration tasks, on page 121](#) in Appendix B: General administration tasks.


- 2. **Tenant Settings** tab: This tab allows you to add, configure or remove the tenant settings.

A tenant is a logical group of site collections that share the same configuration. In an on premise SharePoint deployment, a tenant represents a SharePoint farm or a SharePoint web application. A tenant represents a SharePoint tenant in SharePoint online. In previous versions, to support these configurations, a separate configuration database was needed. As of 9.1 a single configuration database is used to support these configurations. These changes are introduced as part of SaaS support. Managed Service Providers can now use the configuration tool to support multiple customers.

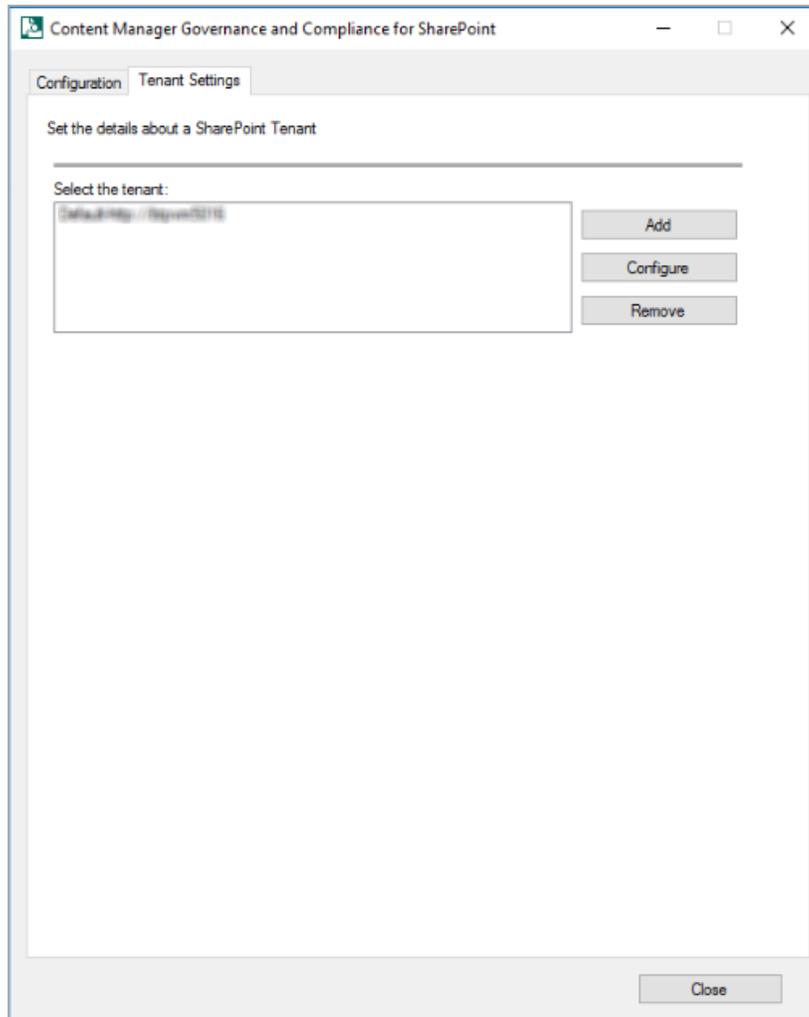

You need to save a tenant before you can continue with the rest of the configuration. From the **Tenant Settings** tab a tenant can be added, configured or removed. Click **Add** or **Configure** on the **Tenant Settings** tab. The **Tenant Settings** window is displayed.

- *Add* - Will add a new Tenant

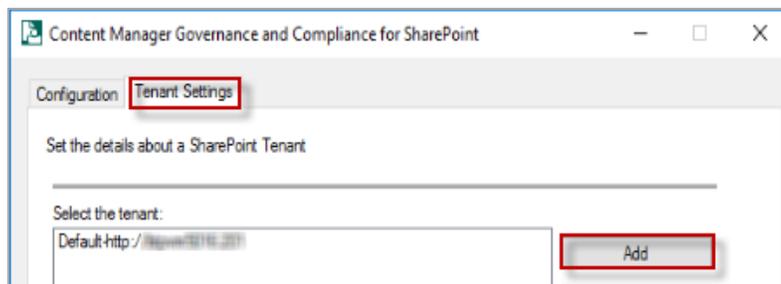


- *Configure* - Select an existing Tenant and then click 'Configure' This will display the tenant for modifying
- *Remove* - Select the existing Tenant and then click remove, this will the Tenant. When a

Tenant is removed all the jobs and configuration related to that particular tenant will be removed from the configuration database.

Configuring a Tenant


To configure a Tenant select **Add** from the **Tenant Settings** tab. A Tenants settings dialog will display, the Name and base URL need to be populated before the save button is selected. The "Base Url" is your web application url in an on premise scenario, whereas it is your SharePoint online tenant root url in case of SharePoint online. The Id is a read only field that is automatically populated with a Tenant ID.

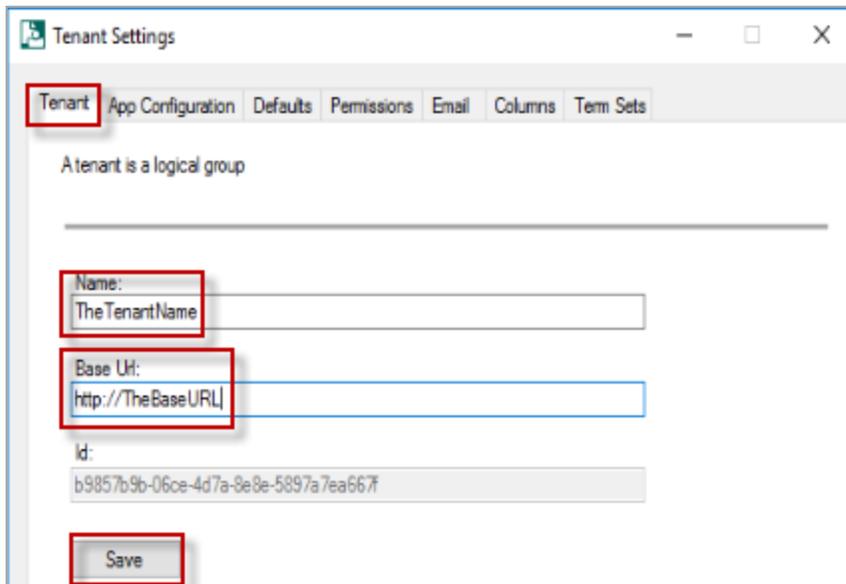

Create the .app file

Before you can add the app to the corporate app store, it is necessary to generate the .app file first. The .app file contains the details of the Content Manager Governance and Compliance app. It must be generated uniquely for each organization as it contains the unique URL of the [Content Manager Server URL](#).

Using the configuration tool, navigate to the **Tenants** tab then select the **App configuration** tab.

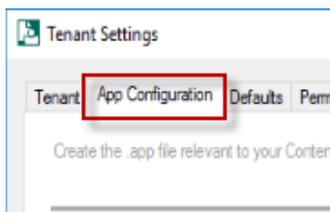

Determining the template to use

When the Content Manager Governance and Compliance app is added to a site, the items ribbon will include the following buttons:

- Manage with Content Manager
- Finalize with Content Manager
- Relocate to Content Manager
- Archive to Content Manager
- Management Details
- Security Details

It may be required in your organization to prevent one or more of these buttons being made available to end users. In the next steps, the app file will be generated based on a template. By default, the template used contains all menu items.

Should you require one or more items to not be included, then you must change the template that is being used. Firstly, identify which template is applicable:

Template file name	Included menu items
ContentManagerGovernanceComplianceTemplate.app and CMModernUIGovernanceComplianceTemplate.app	Manage with Content Manager Finalize with Content Manager Relocate to Content Manager Archive to Content Manager Management Details Security Details
AppTemplate2.app and ModernUIAppTemplate2.app	Finalize with Content Manager Archive to Content Manager Management Details Security Details
AppTemplate3.app and ModernUIAppTemplate3.app	Archive to Content Manager
AppTemplate4.app and ModernUIAppTemplate4.app	None

<p>AppTemplate5.app</p>	<p>None (including configuration menu options)</p> <p>NOTE: Since AppTemplate5 is not relevant for Modern UI, it is not added.</p>
--------------------------------	---

NOTE: All templates except AppTemplate5 include configuration menu options such as RMOs and exposure settings.

If a template other than the **ContentManagerGovernanceComplianceTemplate.app** or **CMModernUIGovernanceComplianceTemplate.app** is required, you must perform the following steps before proceeding:


Navigate to the directory the templates are installed to. This is the Templates directory under the install directory.

Change the name of the **ContentManagerGovernanceComplianceTemplate.app** file to **ContentManagerGovernanceComplianceTemplate1.app**.

Locate the file that is the template to be used. Copy this template and change the name of it to:

ContentManagerGovernanceComplianceTemplate.app

- a. For On premise SharePoint
 - i. Select the SharePoint Site User Experience - **Classic** or **Modern**. The **Classic** option is the default SharePoint experience.
 - ii. Enter the **App ID** captured while [registering the app](#).

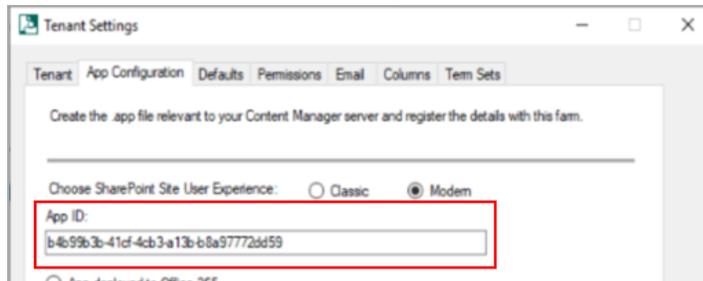

- iii. Select the **App deployed on premise** radio button to enable the on premise controls.
- iv. Choose the client signing certificate that was used when [3 Initial Setup and Installation, on page 20](#).
- v. Enter the password used with the selected certificate.
- vi. Enter the issuer ID obtained while [3 Initial Setup and Installation, on page 20](#).

App deployed on premise

Client signing certificate (.pfx)

Client signing certificate password:

Issuer ID:

- vii. Click **Configure App**. If successful you will be presented with a success message.
- b. For SharePoint Online
 - i. Enter the **Client ID** captured while [registering the app](#) as the **App ID**.
 - ii. Select the **App deployed to Office 365** radio button to enable the relevant controls.
 - iii. Enter the **Client Secret, Azure Client ID and Azure Tenant ID**.

To get the **Client Secret**, see [registering the app](#) section for details.

To get **Azure Client ID** and **Azure Tenant ID**, see section [4 Configuration](#) for details.

App deployed to Office 365

Client Secret:

Azure Client ID

Azure Tenant ID

App deployed on premise

Client signing certificate (.pfx)

Client signing certificate password:

Issuer ID:

- iv. Click **Configure App**. If successful you will be presented with a success message.


Tenant Settings window

You need to save a tenant before you can continue with the rest of the configuration.


The **Tenant Settings** window includes the following tabs:

- a. **Tenant** tab: This tab includes details of tenant - **Name**, **Base Url** and **ID**.


The **Base Url** is your web application url in an on premise scenario, whereas it is your SharePoint online tenant root url in case of SharePoint online. The Id is a read only field that is automatically populated with a Tenant ID.

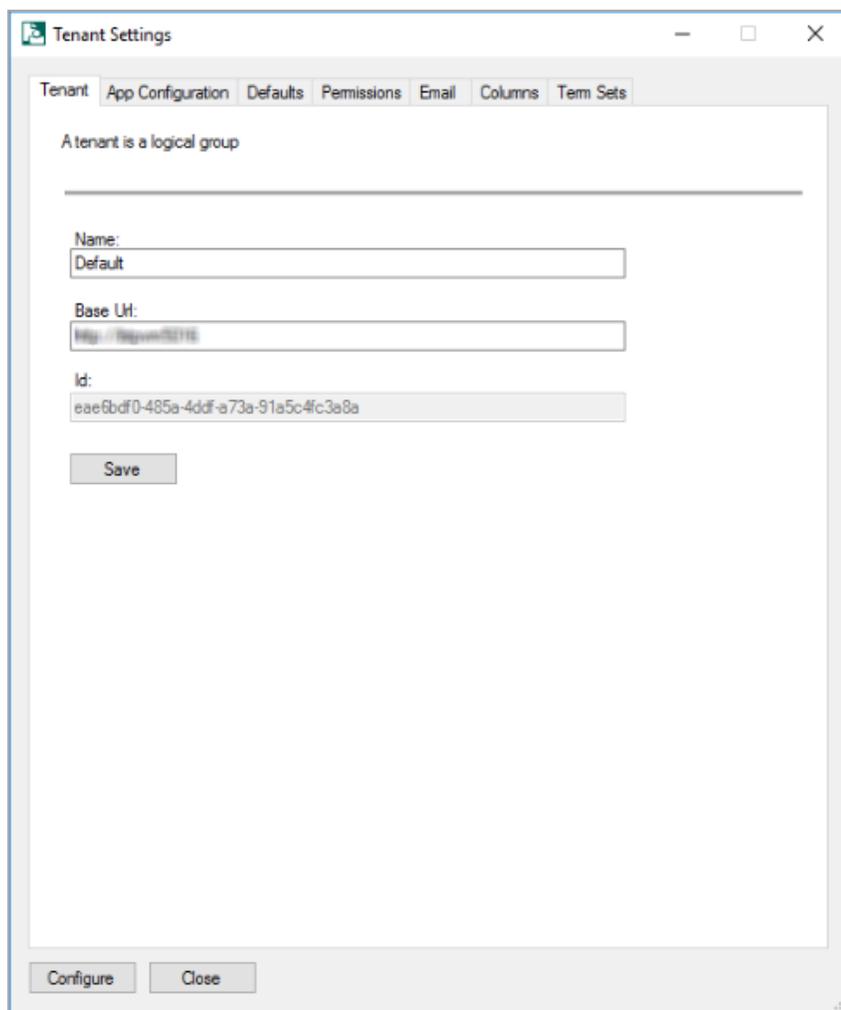


- b. **App Configuration** tab: This tab includes information on SharePoint Site User experience, App ID, whether App is deployed on SharePoint online or OnPremise, path to certificate file, and Issuer ID.

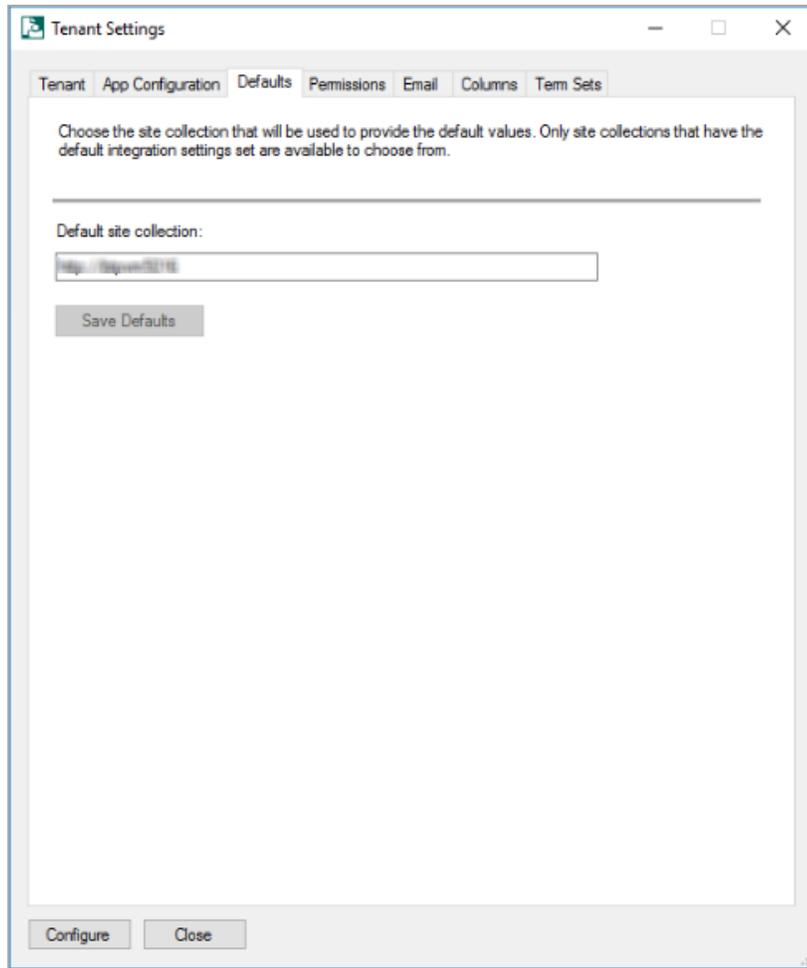


- d. **Permissions** tab: This tab includes information about the Primary Configuration Administrator, the user who is permitted to perform actions.

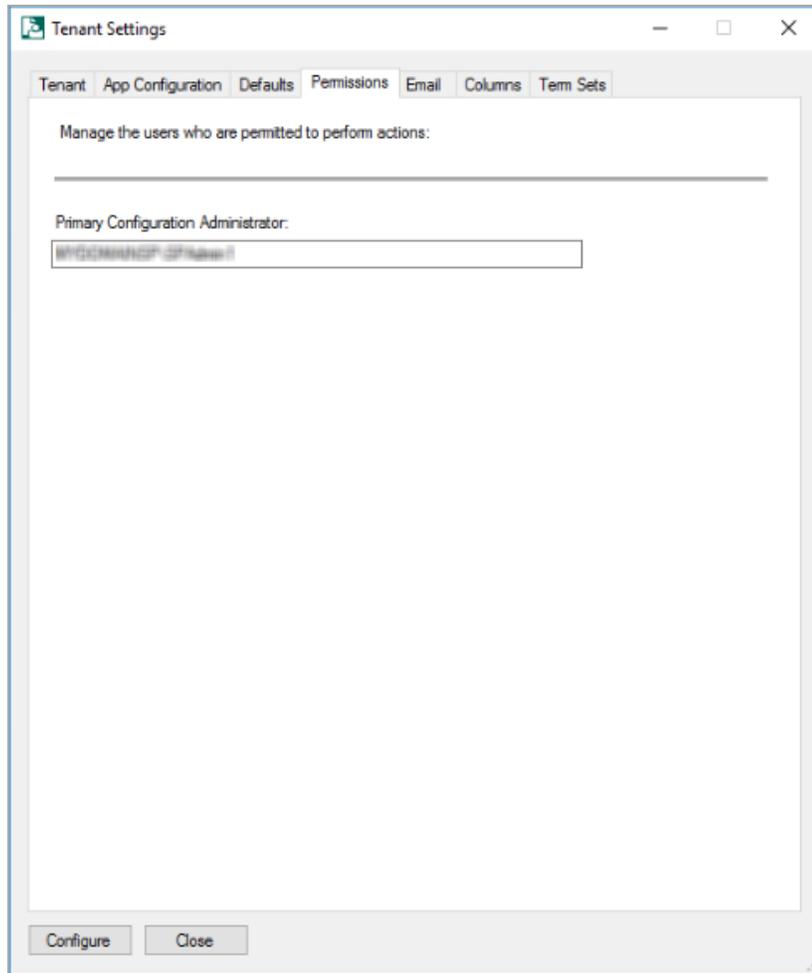

- e. **Email** tab: This tab contains details of email notification settings, such as, **SMTP Server Name** and **Reply to address**.

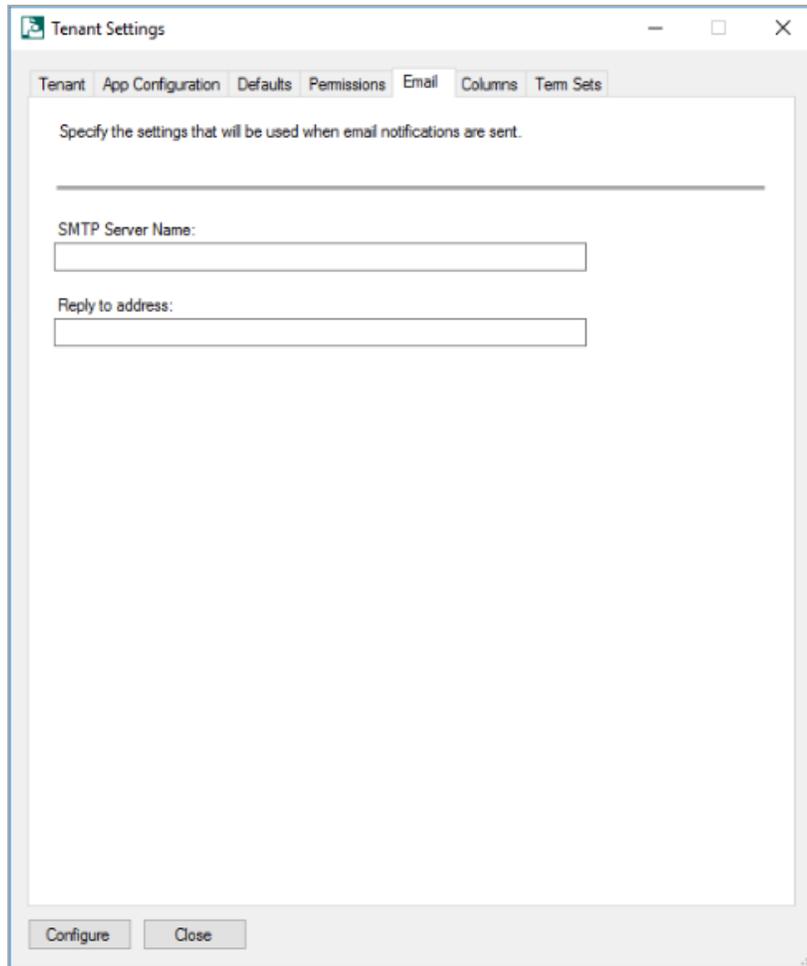

- f. **Columns** tab: This tab contains information about site columns for site collection that represent fields in the Content Manager.

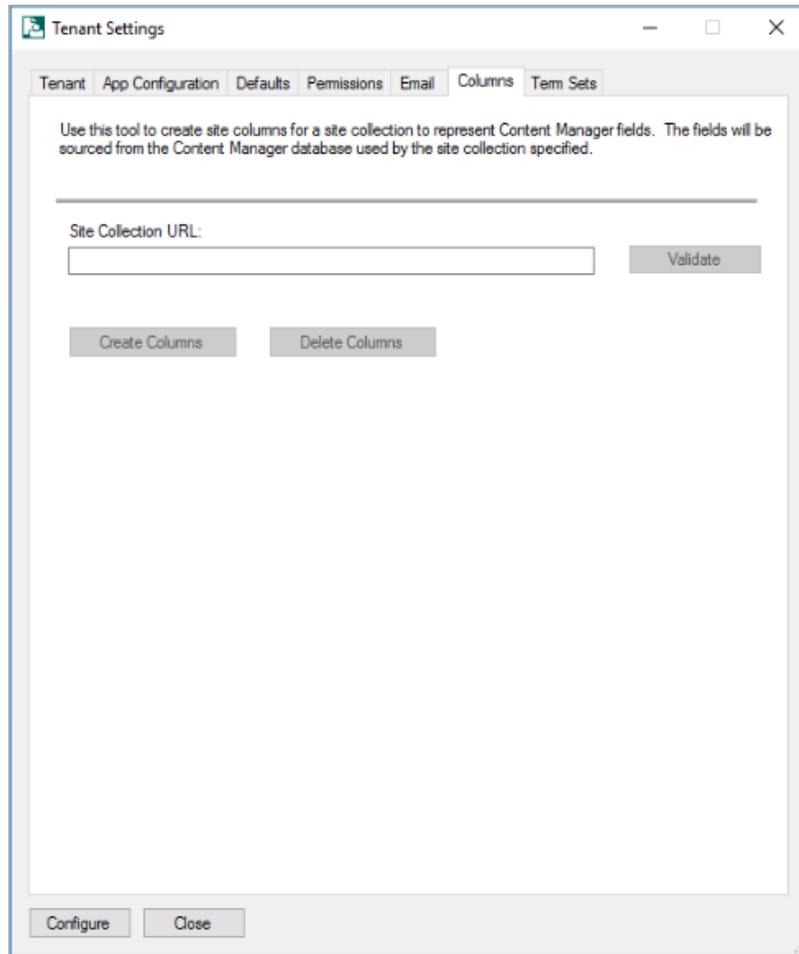


When working with managed SharePoint content, often there is a requirement to see values for the corresponding Content Manager record in the SharePoint list item itself. For example, it may be important to your organization that the record number for the record is easily identified. In this scenario, a “record number” column could be added to the list. Using column mapping, it can be mapped such that it shows the value of the record number from Content Manager.

The configuration tool includes a column creation tool. This tool creates a collection of site columns that represent most of the fields in Content Manager. These columns are automatically mapped to the relevant Content Manager field during creation.

Once created, these fields appear in the “Content Manager Columns” group and can be used throughout the site collection they exist on.


Creating columns requires that the [Set default integration settings, on page 85](#) section has been completed first.

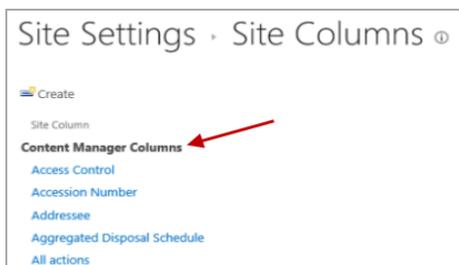

The creation of columns is optional. It is not required by the application.

Creating columns

- i. To Create Columns, run the Configuration tool and navigate to the **Tools** then **Columns** tab.
- ii. Enter the full URL of the site collection that the site columns should be created on. The **Validate** button will confirm that the URL entered is a suitable SharePoint site collection.
- iii. Click the **Create Columns** button to start the column creation.

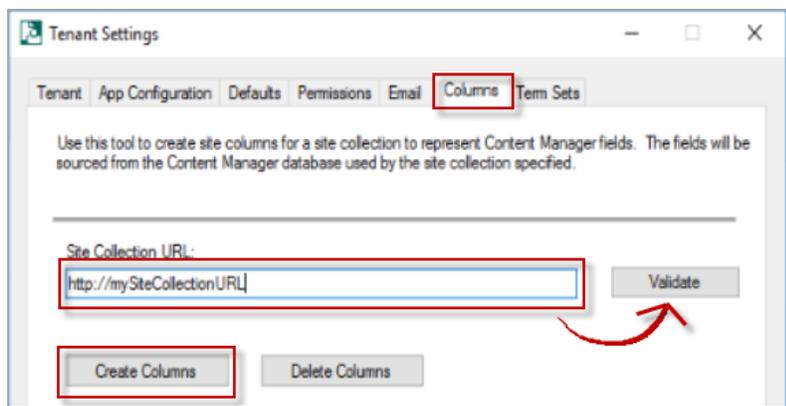

NOTE: For SharePoint Online only

If column creation fails with the error message Error creating new site field. Details : Classification (All) or “unkown error”, perform the following steps:

- i. Check if the HPRMFieldBehaviour.js file exists in the site's master gallery.
- ii. During the configuration, due to permission/access issue, the file might not have been uploaded to the master gallery. In this case, run the following powershell commands to upload the file manually:
 1. Connect-SPOService https://<yourdomain>-admin.sharepoint.com
 2. Set-SPOSite -Identity https://<yourdomain>.sharepoint.com - DenyAddAndCustomizePages \$false

The HPRMFieldBehaviour.js file is available in the installation directory (example, C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration).

Maintenance of columns

Run the create column tool again to modify an existing column.

Deleting columns


To remove all columns that have been created by the tool, enter the URL of the site collection to remove them from, then click **Delete Columns**.

NOTE: This will delete all columns in the “Content Manager Columns group, including any that have been added manually.

If a column is being used by a content type, it will not be deleted. When all columns cannot be deleted, the log file will indicate which columns were not removed.

TIP: It is recommended that if you are using SharePoint farm create columns only on the content type hub so that is is propagated to other site collection.

- g. **Term Sets** tab: This tab includes information about Content Manager Dataset ID and term sets.

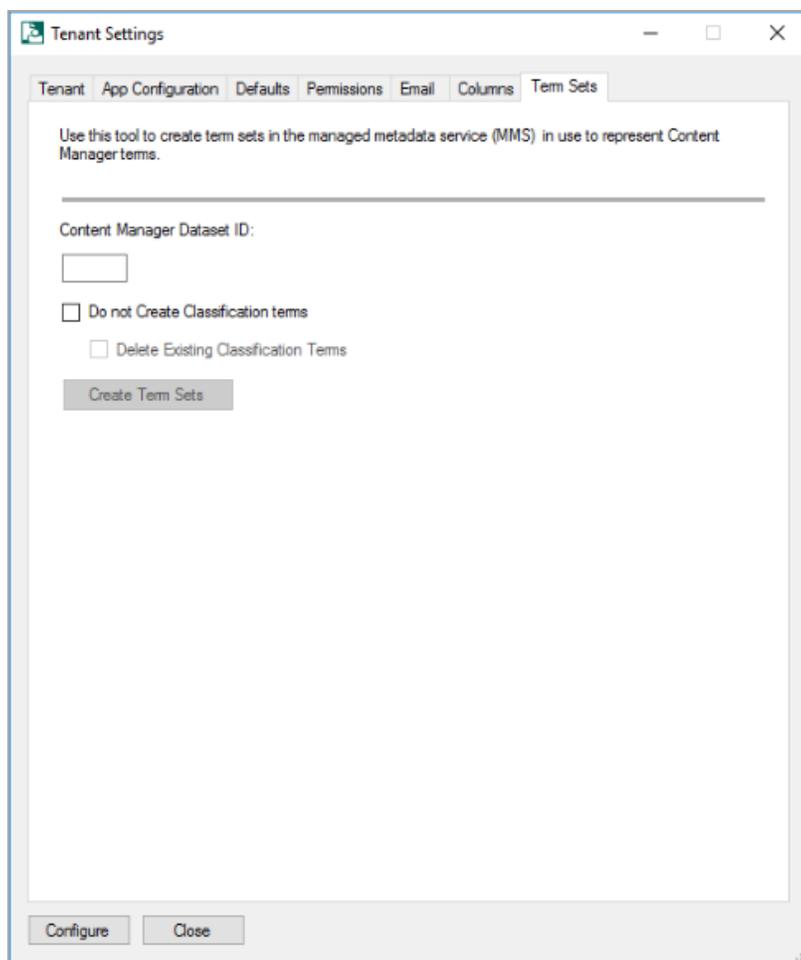

Enter the **ID** of the Content Manager dataset that the term sets should be created to represent then click **Create Term Sets**.

This will instigate the process of creating term sets. Note that the term sets will be created in every term store that you have created the Content Manager group.

NOTE: *If no groups have been created, this tool will not fail. Term sets will just not be created.*

You can repeat use of this tool for as many datasets as you intend to use.

Creation of terms sets without using Classification terms

A term set can be created without leveraging the Classifications within Content Manager by selecting the "Do not create Classification terms" check box on the term sets tab. Doing so will also allow you to remove any existing Classification terms (see below)

Removal of existing term sets

If your installation has existing Classification terms, you can remove all of the existing entries by ensuring the "Delete existing Classification terms" check box is selected when creating term sets without using Classification terms (see above).

Maintenance of term sets

From time to time, new terms will be added to Content Manager and existing terms will be modified or even removed entirely. Because of this, it is necessary to maintain the values of the term sets.

A maintenance process executes every hour to update the terms.

Alternatively, if a change is required more immediately than this, run the term sets tool again. This will correct any term set changes almost instantly.

Set default integration settings

The **Default Integration Settings** are used to determine how content in SharePoint is managed by Content Manager. It is the **Default Integration Settings** that are used during the management process.

For more advanced configuration options, see *Content Manager Governance and Compliance SharePoint App: User Guide*.


NOTE: For initial configuration, you should set the default integration settings used by the default site collection as these will be used by other site collections. If performing initial configuration, in the following sections, use the default site collection.

Accessing app configuration pages

A number of app configuration pages are accessed from a page referred to as the "app start page". To access the app start page for the Content Manager Governance and Compliance app, navigate to the site contents page of the site collection.

Locate the **Content Manager Governance and Compliance** app and click on it.

This will take you to the app start page:

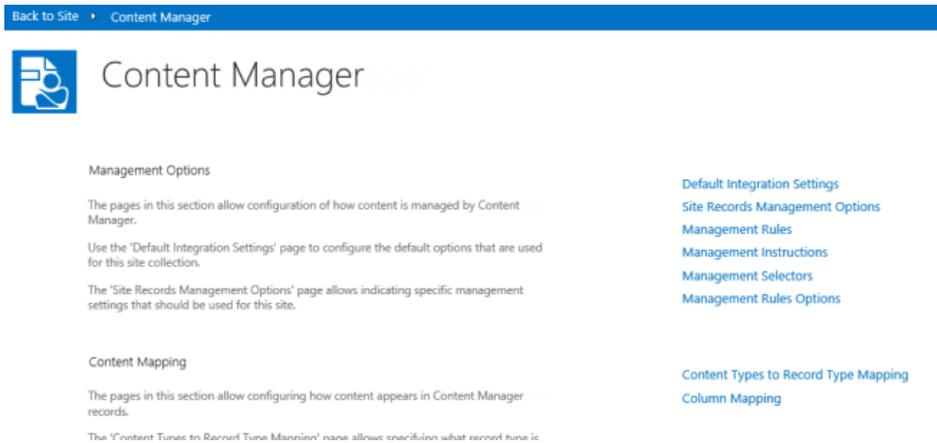

Publish

Once all settings have been entered, they must be published to all servers in the Content Manager farm. Click **Publish** at the bottom of the dialog to reflect the changes to all the servers in the Content Manager farm.


After you have published the information, configure the default integration settings. See, [4.3.1 Setting the default integration settings, below](#).

IMPORTANT: This section is only applicable for machines using Windows Azure caching
Restart the Windows service named:
Content Manager SharePoint Service
This is required to complete the configuration of Azure caching.

4.3 Additional Configuration

4.3.1 Setting the default integration settings

From the app start page click the **Default Integration Settings** link. You must be a site collection administrator to access this page.

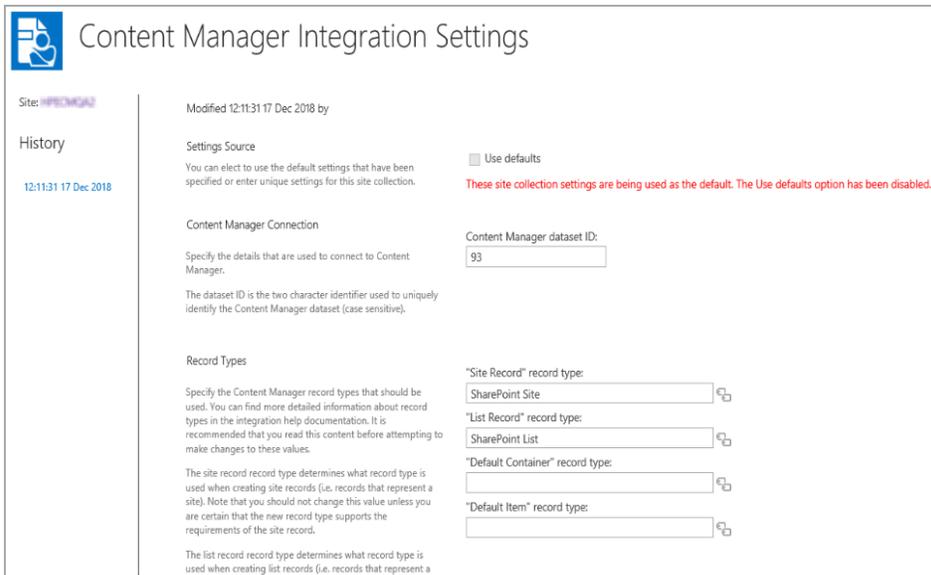

Settings source

The settings source section allows you to specify if the values used for this page should come from the default site collection, or whether this site collection specifies its own values.

If the **Use defaults** check box is unchecked, then specific values for this site collection can be entered.

If this site collection is the nominated default site collection, then the **Use defaults** check box is disabled.

Content Manager Connection

The Content Manager Connection section allows you to specify the ID of the Content Manager dataset to be used.

Enter the two character identifier of the Content Manager dataset ID to use. This value is case sensitive.

Record Types

The record types section allows you to specify the Content Manager record types that should be used by default during management.

- **Site Record** - control will allow you to select any record type that has a behavior of **SharePoint site**.
- **List Record** - control will allow you to select any record type that has a behavior of **SharePoint list**.
- **Default Container** - control will allow you to select any record type that has a behavior of **Folder** and is marked as suitable for being a list item record.
- **Default Item** - record type will allow you to select any record type that has a behavior of **Document** and is marked as suitable for being a list item record.

NOTE: You must specify a value for all four record types before the page will allow you to save.

For details regarding record type requirements see the [Prepare record types](#) section earlier in this document.

NOTE: Only record types that existed prior to creating term sets or a term set maintenance job running will be available for selection.

You must have specified a dataset ID prior to selecting record types or the selection dialog will not show any values.

For information on remaining settings on this page, see *Content Manager Governance and Compliance SharePoint App: User Guide* and can be left default for the initial setup.

4.3.2 Setting up subsequent site collections


Following configuration of the initial, default site collection, all that is required to configure subsequent site collections is to [add the app](#).

If the default values configured on the default site collection are suitable for this subsequent site collection, then there are no further steps required.


4.3.3 Setting up One Drive for Business

One Drive for Business (ODB) provides cloud file storage for business users. A user's drive in ODB is in fact nothing more than a document library. The Content Manager Governance and Compliance app is fully compatible with ODB.

To utilize the app with ODB involves adding the app as is required for any other site or site collection. This can be done by accessing the Site contents and then [add the app](#).

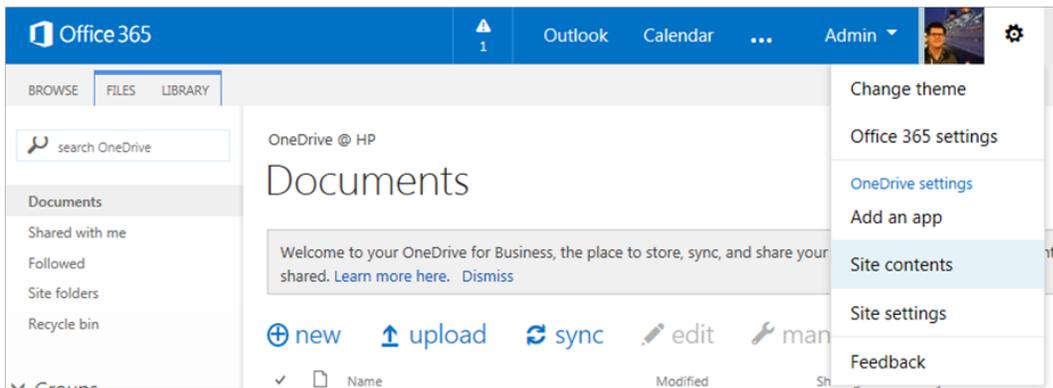

Alternatively, the Add an app link can be used to navigate directly to apps page.

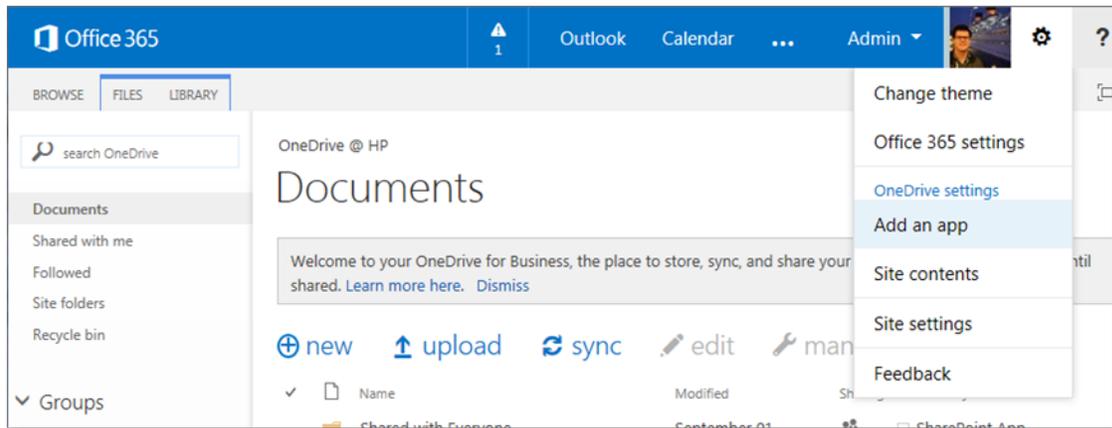

4.3.4 Supporting multiple SharePoint farms or multiple configuration databases

A configuration database used by a Content Manager farm is only designed to support a single SharePoint farm. In the scenario where your organization has multiple SharePoint farms, you will need to plan for this accordingly.

A similar scenario that requires the same planning in the case where multiple configuration databases are required. Consider the scenario where you have 20 site collections. Ten of these site collections will require one set of configuration while the other 10 use a different set of configuration.


With a single configuration database, the first ten could use the default site collection settings to obtain configuration values. The other ten though would have to be set individually as the default values are not the ones required. This requires setting the same values ten times.

If the second lot of ten site collections used an independent configuration database, a default site collection could be defined and the other nine site collections consume the values from it.

There are two primary options available to support these scenarios.

1. Paired SharePoint and Content Manager farms

A Content Manager farm has a single configuration database. In the “paired” approach, for each SharePoint farm, a dedicated Content Manager farm is configured each with a single configuration database.

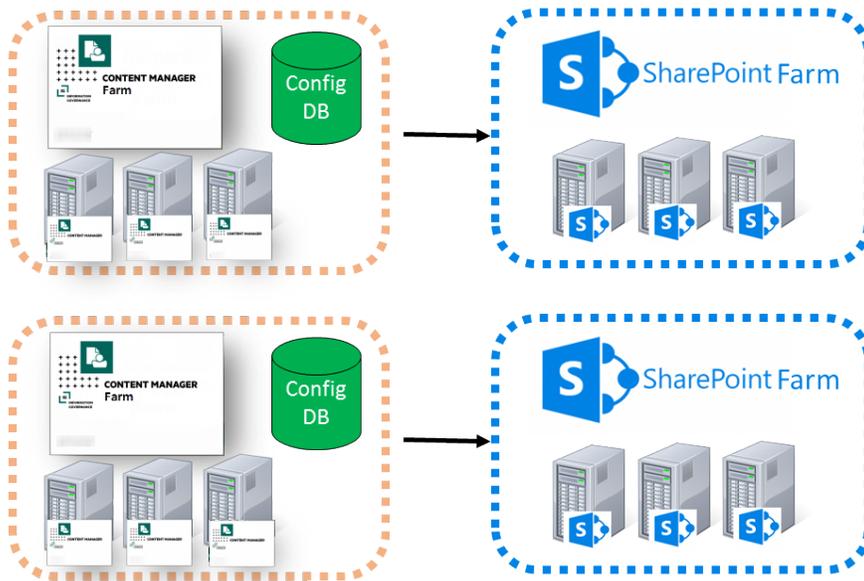


The advantage of this approach is that it is simple to understand and configure as everything for a particular SharePoint farm is logically separated.

The disadvantage of this approach though is that you may end up with underutilized workgroup servers. Consider the scenario where your organization has two SharePoint farms. It has been determined that the number of workgroup servers required to service the load of each farm is as follows:


- SharePoint farm 1: 1.5 workgroup servers
- SharePoint farm 2: .5 work group servers

Although a sum total of two workgroup servers is required to address the total load, using the paired approach, three servers would be required.

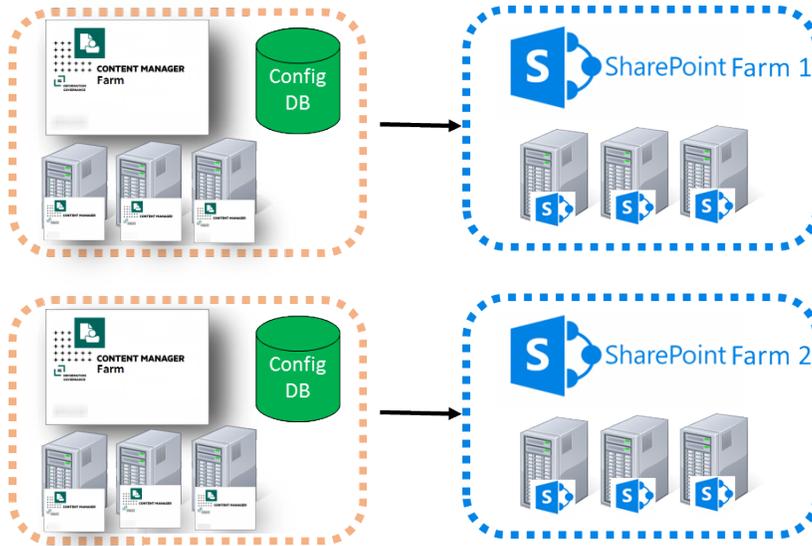

2. Shared Content Manager farm


The second approach to supporting multiple SharePoint farms is to “share” a Content Manager farm with a number of SharePoint farms. In this approach, one Content Manager farm is created, however, the farm contains multiple configuration databases (one for each SharePoint farm)

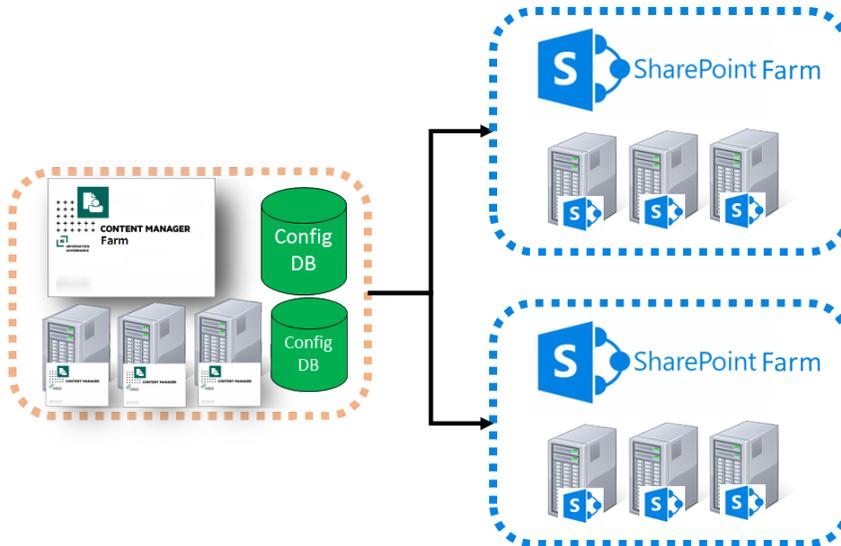

The disadvantage of this approach is that it is more difficult to configure than the paired approach. The advantage though can be illustrated by considering the scenario where your organization has two SharePoint farms and it has been determined that the number of workgroup servers required to service the load of each farm is as follows:

- SharePoint farm 1: 1.5 workgroup servers
- SharePoint farm 2: .5 work group servers

Using the shared approach, the requirements can be serviced with two workgroup servers as against the three that are required in the paired approach.

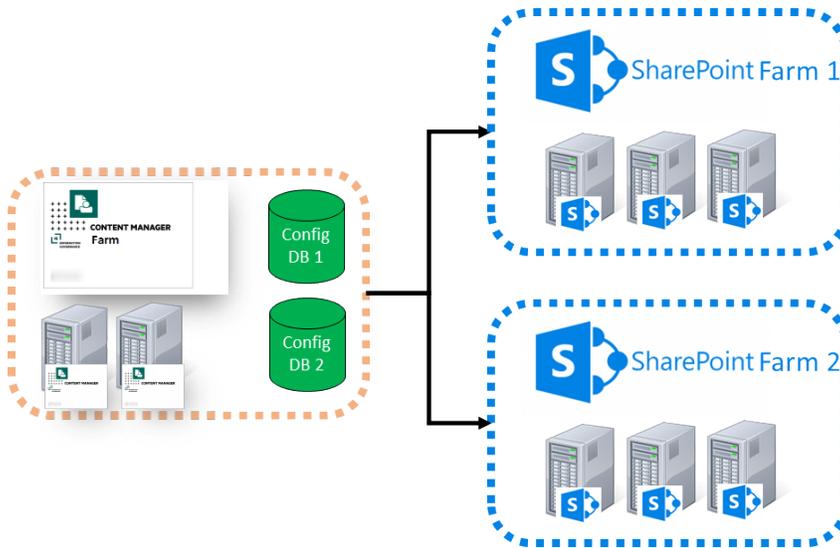


Architecture of a shared Content Manager farm

For the explanation of a shared Content Manager farm, the farm will be considered to only have a single workgroup server. When using multiple servers in a Content Manager farm, the architecture and configuration must be repeated on each server in the farm.

When the Content Manager Governance and Compliance app server components are installed on a workgroup server, two key components are created:


- a. An IIS site referred to as the Data Store Server (DSS)
- b. The Content Manager SharePoint Windows service (referred to as the job service)

These components interact with the configuration database used by the farm.

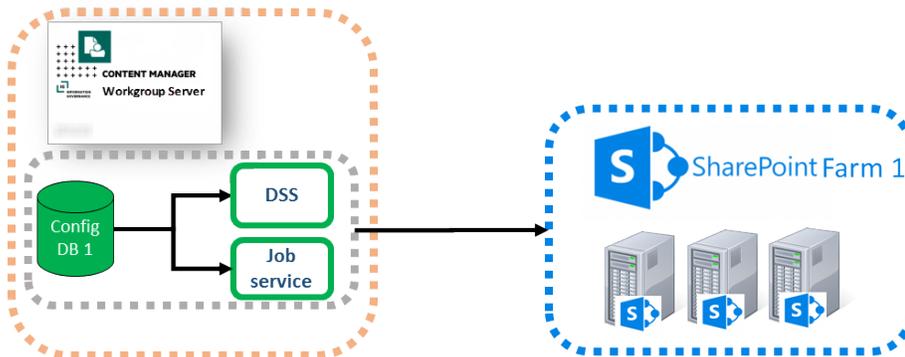

In this diagram the config database is illustrated as residing on the workgroup server. It is important to recognize that this database could reside on a dedicated SQL server farm. It has been drawn this way for convenience.

The shared Content Manager farm approach involves duplicating the core components to allow them to interact separately with the relevant config database.

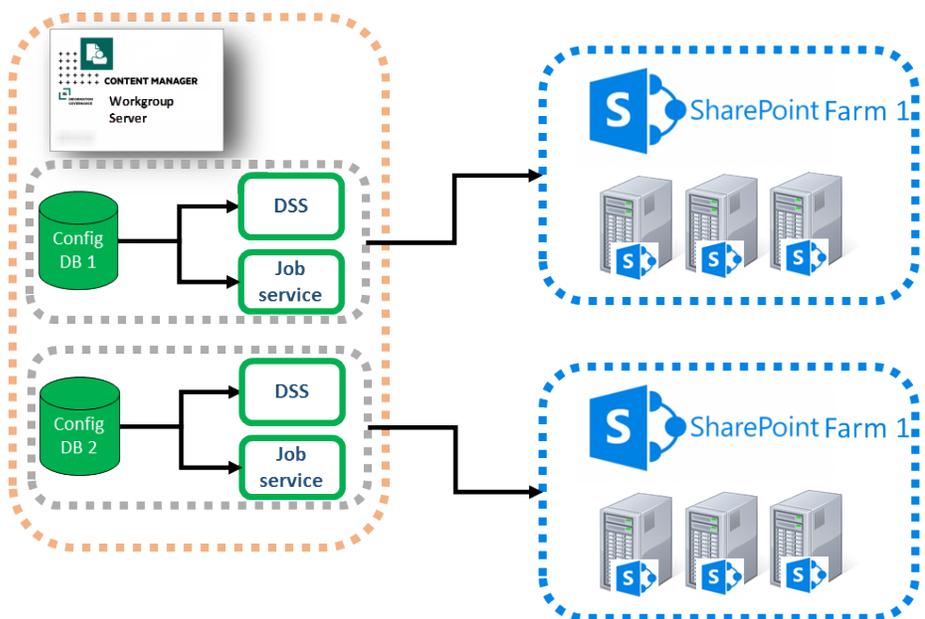

When duplicated in this way, the DSS must be placed on a different IIS port or use a different host header to allow the Content Manager Governance and Compliance app on each farm to access the correct configuration database.

Creating a shared Content Manager farm

This section assumes that you have correctly installed and configured this Content Manager farm for one SharePoint farm already.

A script is installed with the server components that performs most of the configuration effort for you.

Modifying the execution policy on the machine

In order to run this script, a temporary change to the execution policy may be required.

Run an instance of Powershell as an administrator

Determine the current execution policy in use by running the following script:

```
Get-executionpolicy
```

Note down the name of the current policy so it can be used to revert to it.

Set the execution policy to RemoteSigned using the following script:

```
set-executionpolicy RemoteSigned
```

After running the script to create the shared Content Manager farm, revert your policy back to the original by running the following script where [Your original policy] is the name of the policy determine by running the get script:

```
set-executionpolicy [Your original policy]
```

Running the farm configuration script

Run Powershell ISE as an administrator. Using Powershell ISE open the file **FarmConfiguration.ps1** from the installation directory used when installing the Content Manager Governance and Compliance app server components

Run this script.

This script will prompt you for the following details:


- The port number to use for the IIS site – ensure you choose one that is not already in use
- Whether to enable SSL for the site – this will add a https binding to the site
- The identity of the application pool in the format **domain\name**
- The password for the application pool
- The identity of the job processing service in the format **domain\name**
- The password for the job processing service

Following the execution of the script, you can verify that it succeeded by confirming the following steps. The name of the components will have the number of your farm appended. The first additional farm you create will be 1, the next 2 and so on. In the following section, the term **Farm x** has been used to represent the farm number:


- A new directory has been created at the same level as the installation directory named **Content Manager SharePoint Integration (Farm x)**



- In IIS a new site has been created named **Content Manager SharePoint Server (Farm x)**

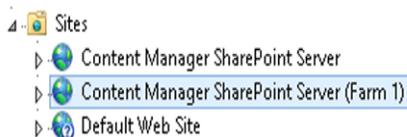

- In IIS a new application pool has been created named **Content Manager SharePoint Server (Farm x)**



- A new windows service has been created named **Content Manager SharePoint Service (Farm x)**

 Content Manager Automated Email Management Service	Content Ma...	
 Content Manager SharePoint Service	Content Ma...	Running
 Content Manager SharePoint Service (Farm 1)	Content Ma...	Running
 Content Manager Workgroup Service	Content Ma...	Running

NOTE: This script should be run for every additional farm that is to be created.

Configuring a shared Content Manager farm

After running the script to create the shared Content Manager farm, each new instance must be configured.

- Post installation steps

Essentially, running the farm configuration script installs a new instance of the server components. You must complete (for each farm you have created), all steps in chapter 3 after the installation chapter (3.1.2).

- Configuration

For each farm that has been created using the farm configuration script, you must complete the [configuration](#) for the farm just as you did for the first installed farm.

You must run the right instance of the configuration tool though. The shortcut installed for the configuration tool by the MSI is the instance used by the first farm created by the MSI. To locate the correct instance of the configuration tool to run, navigate to the directory that was created by the farm configuration script. Locate the following file:

`HP.Integration.SharePoint.JobProcessing.exe`

Right click and run as administrator. This is the instance of the configuration tool that applies to that farm.

It is also important to understand that you must follow the steps to generate a new app file. The new app file generated will contain the correct URL to the shared Content Manager farm instance to use. This is the app file that must be used on the SharePoint farm managed by this shared instance.

Removing a shared Content Manager farm

If a shared Content Manager farm is no longer required, it can be removed as follows:

- Ensure that the job processing service applicable to the farm is stopped
- Open Powershell ISE as an administrator
- Run the following script replacing “x” with the number of the farm to remove. This will delete the job processing service for the farm:

```
$service = Get-WmiObject -Class Win32_Service -Filter "Name='Content Manager SharePoint Service (Farm x)'"
$service.delete();
```


- From IIS delete the site created for the farm
- From IIS delete the app pool created for the farm
- Delete the directory created for this farm

NOTE: The uninstalling the MSI will not remove any shared farms that have been created. You must use this manual process.

4.3.5 Other configuration tasks

Trusted sites

The integration includes a number of dialogs that are shown to the user. These dialogs may include address bars along top of the dialogs. Although these do not hinder the functionality of the product, they may be aesthetically incorrect.

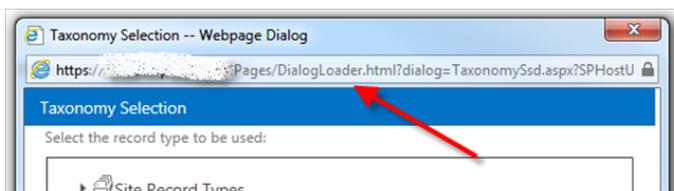


Adding the URL specified as the load balanced URL for the Content Manager farm to trusted sites in Internet Explorer settings will prevent this address bar from being shown.

To add the URL, perform the following steps:

1. Go to **Internet Options > Security**, select the **Trusted sites** and click **Sites**. The **trusted sites** window is displayed.
2. Enter the URL in **Add this website to the zone** field and click **Add**.
3. Click **OK** to close the **Internet Options**.

Once added to the trusted sites, the address bar will no longer show.

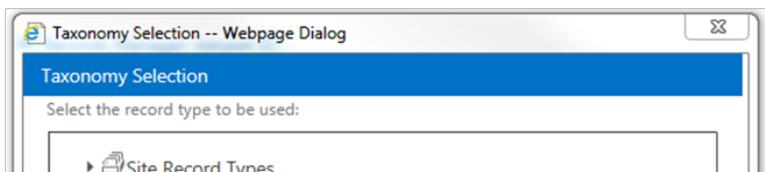

TIP: This configuration task is best suited to group policy rather than setting on individual machines.

5 Upgrading

This section is about upgrading an existing installation of version 8.3 to a later version. This involves upgrading the Content Manager components, and possibly upgrading the app. You need to update the app only if it is mentioned specifically in the new version.

NOTE: Version 9.2 of the Content Manager Governance and Compliance app will only work with version 8.3 of Records Manager. You must upgrade to version 8.3 of Records Manager before upgrading the Content Manager Governance and Compliance App for SharePoint.

5.1 Upgrading the Content Manager components

The upgrade process will overwrite any IIS configuration settings made. Reapply the following:

- [Configuring the use of https](#) (if the Content Manager server is configured to use https)
- [Additional steps for Windows Azure](#) (if the Content Manager server is in that environment)
- [Additional steps for use with SharePoint Online](#) (if the app is hosted in SharePoint Online)

5.1.1 Before you begin

Ensure the following before you begin the upgrade:

- Stop the service: **Content Manager SharePoint Service** on each server in the Content Manager farm. This will ensure that any pending jobs will not get processed during the upgrade.
- Upgrade one workgroup server at a time, first making it unavailable to the load balancer in use. This will ensure that events being raised by SharePoint can still be handled by the remaining servers in the Content Manager farm.
- Perform any configuration tool work once the last server has been upgraded. This will ensure that any database upgrades are not performed until the latest time.

5.1.2 Performing the upgrade

- **Upgrading from 8.3**

If upgrading from 8.3 a tool has been provided to prepare the existing configuration for the 9.2 upgrade. To upgrade the 8.3 Records Manager Farm database see [Upgrade the Content Manager 8.3 Farm database](#).

- **Install the SharePoint client components**

When upgrading to version 8.3, it may be necessary to [install the SharePoint client components](#).

- **Upgrade the server components**

The components that are required to be installed on a Content Manager workgroup server can be installed using the **CM_SharePointIntegration_x64.msi** MSI found on the installation media.

NOTE: You must perform this upgrade on each workgroup server used in the Content Manager farm.

On every server in the Content Manager farm, run the MSI to upgrade the components.

Repeat any steps determined to be applicable in the preceding considerations section.

5.2 Upgrading the app configuration database

NOTE: These steps only need to be performed on one server in the Content Manager farm.

To upgrade, perform the following:

1. Reconnect to the app configuration database

Following upgrade, it will be necessary to connect to the app configuration database again using the configuration tool.

Connecting to an existing configuration database

- a. In the **Join existing farm** group, the **Content Manager farm database connection string** allows specifying the connection string to use to connect to the correct database.

If you have created the database using the steps in the previous section the connecting string details are automatically filled in. Else, click the ellipsis and fill in the details of the database in the Data Link Properties dialog box.


Join existing farm

Content Manager farm database connection string:

Integrated Security=SSPI;Persist Security Info=False;Initial Catalog=f;Data Source=|


Content Manager Server URL:

- b. In the **Data Link Properties** dialog, enter the name of the SQL Server instance where the database resides.
- c. Choose **Use Windows NT Integrated security**.
- d. Select the database from the **Select the database on the server** dropdown.

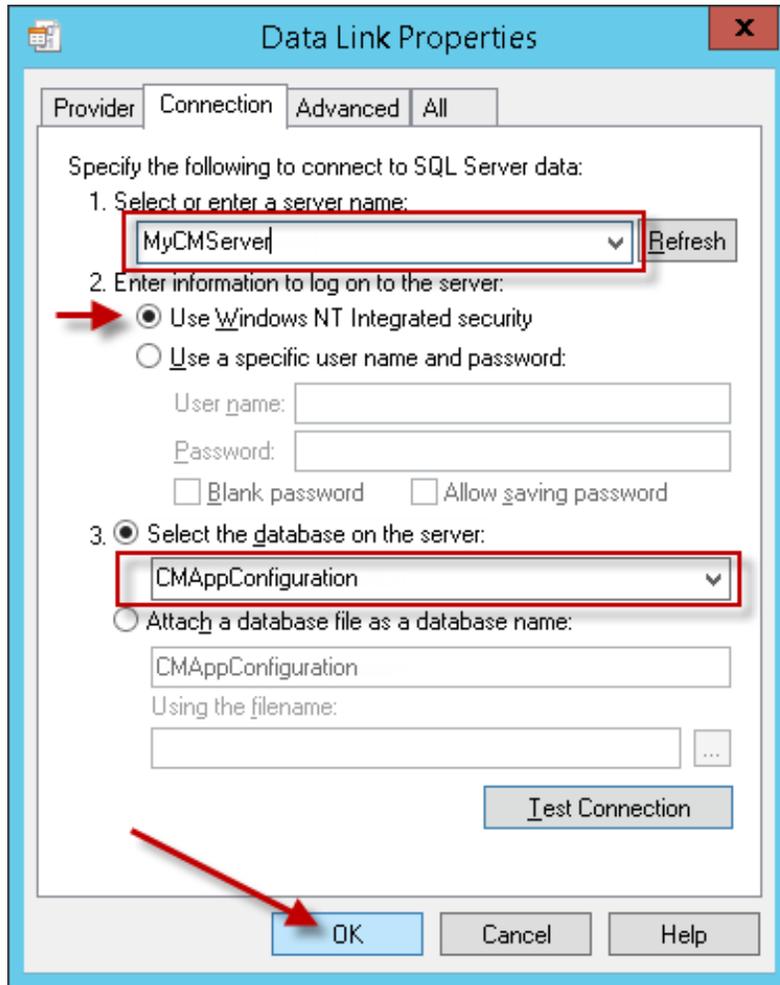


CAUTION: The app configuration database is not the database that Content Manager uses for record storage. Do not attempt to connect to the Content Manager records database in this step.

- e. Click **OK** to construct the connection string.

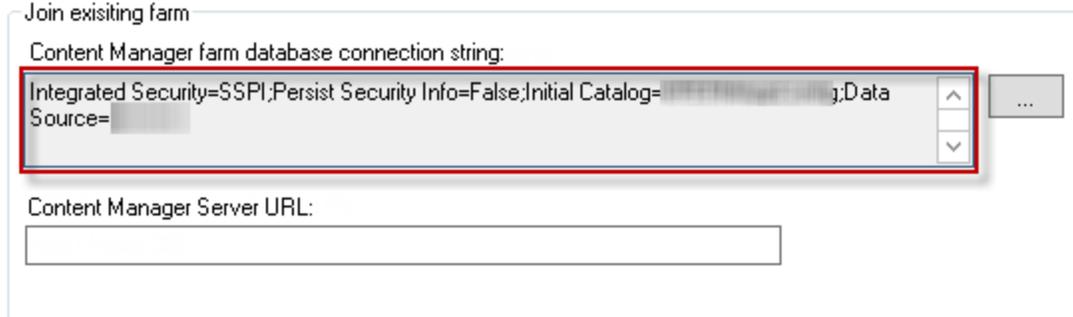

- f. Specify the Content Manager farm URL. Under the connection string details is a text box that allows the entry of the URL to use when interacting with the Content Manager farm.

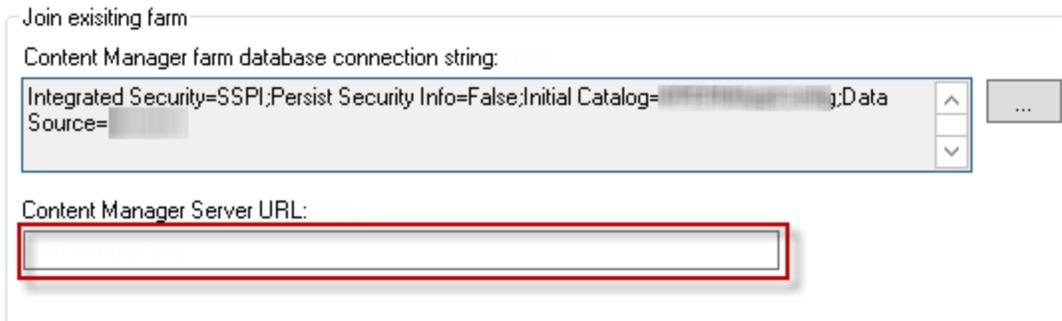

If your farm has only a single server, this is the URL of that server. In the case where HTTP is being used, the URL will be:

`http://MachineName:port`

Where “MachineName” is the name of the Content Manager server and “port” is the [port that you selected](#) during installation. For example, if the machine name was “CM1” and you elected to use port 200, the URL would be:

`http://CM1:200`

If you Content Manager farm contains multiple servers though, this URL must be the [load balanced URL](#) for the Content Manager farm.

2. Upgrade the app configuration database

Using the configuration tool, perform a [publish](#). This will perform any upgrades required on the app configuration database for 9.0 and beyond.

5.3 Upgrading the Content Manager SharePoint configuration app

NOTE: These steps only need to be performed on one server in the Content Manager farm.

To upgrade the SharePoint app, perform the following:

1. Rerun the Content Manager SharePoint configuration app

Regardless of whether the app was updated or not, following an upgrade the app configuration tool must be rerun. It is not necessary to publish again.

2. Update the app in the app catalog

It will not always be necessary to update the app and therefore it should only be updated if it is specifically mentioned that it should be done.


NOTE: Upgrading to version 8.3 release requires the app to be upgraded. The upgraded app will be version 8.3.0.0.

Should the app require updating, ensure that you have [generated the updated app file](#) before proceeding.

IMPORTANT: There is a known issue in SharePoint that in some scenarios causes the app upgrade process described below to not work correctly. If the upgrade process does not work correctly, an alternative set of steps are included. It is permissible to simply follow the alternative upgrade procedure described without attempting the upgrade first.

a. **Standard app upgrade procedure**


- i. Navigate to the app catalog. See the appendix [Identifying the app catalog in use](#) for guidance.
- ii. Navigate to the **Apps for SharePoint** section.
- iii. Click **new app** and when prompted, choose the updated .app file ensuring that **Add as a new version to existing files** is checked.

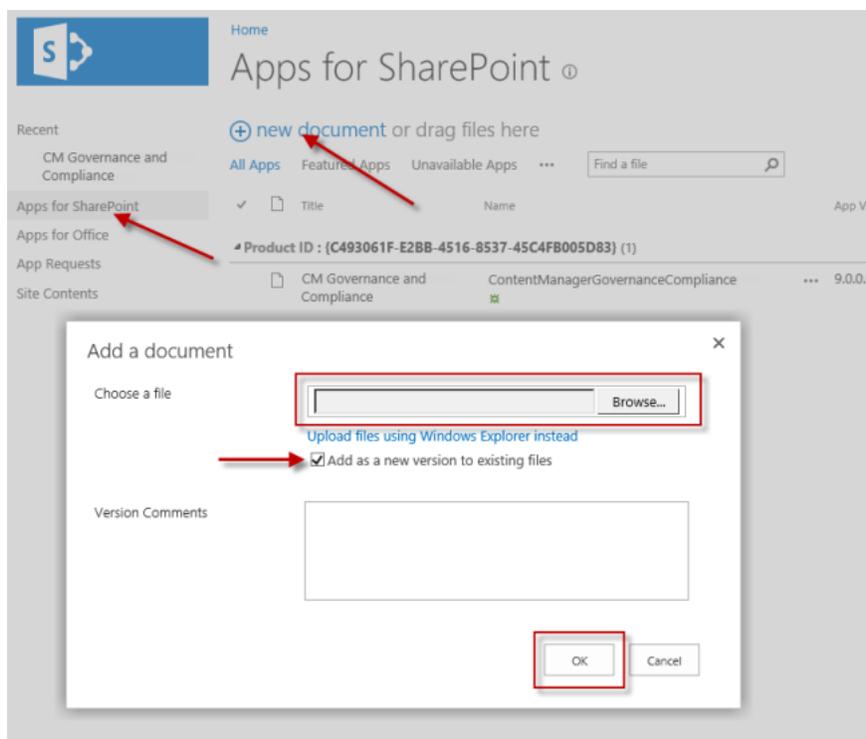

This will add the updated app as a new version to the existing app. You can see the app version in the app catalog.

When updating the app, you add the app from that point on, the new version of the app will be used. For existing places where the app has been added, you will need to elect to update the app.

- iv. Navigate to the site that the app is added to and then to the site contents for that site. The app will indicate that an update is available:

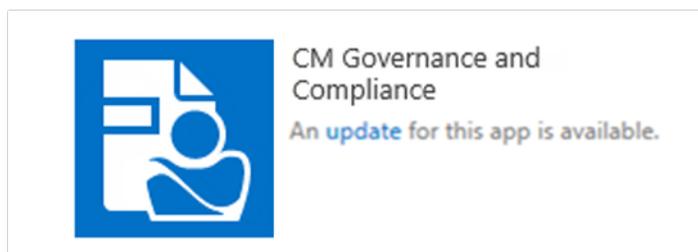


NOTE: The availability of the update may not appear immediately.

- v. Click **update**. This will show the details of the update (similar to below):

NOTE: The version displayed in this screenshot is for illustrative purposes only. The version will be the one described at the beginning of this section.

- vi. Click **GET IT** to begin the update.


A quick way to test that the app has upgraded successfully is to navigate to the ribbon for a list or library. From the **List** or **Library** tab, drop down the **Content Manager** next to the list or library settings. Confirm that the **Audit History** option appears and that the ribbon button is Content Manager and uses the new green background logo.

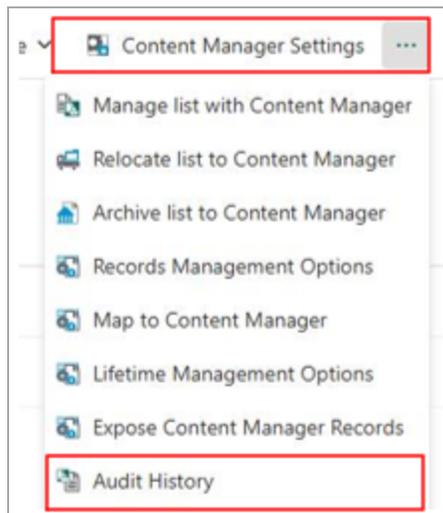

NOTE: It may take up to an hour for SharePoint to begin displaying the new images and menu options.

- vii. Select an item in a list or library and from the Items of Files tab, choose the **Management Details** option.

The size of the dialog should be taller than it is wide. If it is almost square, then the app has not updated correctly.

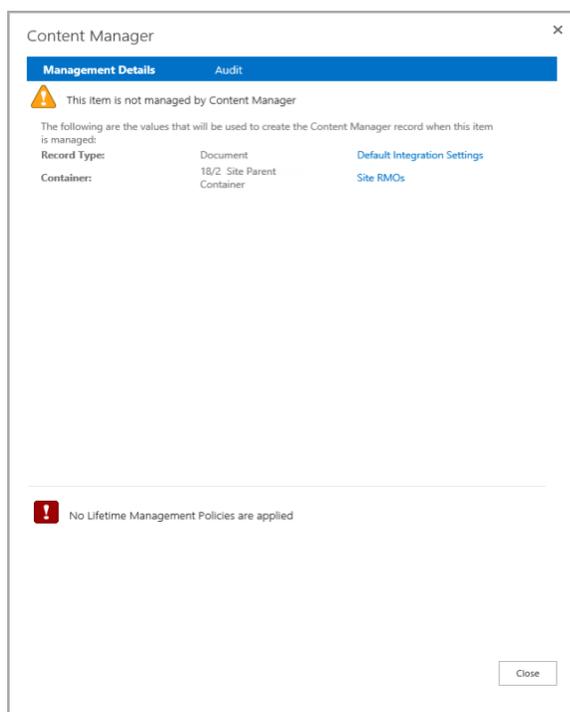

NOTE: There is a SharePoint issue that can result in the size of this dialog being correct on some lists but not on others. Removing the app from the site and re-adding it generally corrects this issue.

b. Alternative app upgrade procedure

Should the app upgrade fail then the following steps provide an alternative upgrade path. These steps involve removing the app wherever it has been added, removing it from the app catalog then re-adding it to the catalog and all required sites.

NOTE: Removing the app will not remove the configuration that has been performed. Configuration such as mappings, RMOs, LMPs and management rules will all still remain in the configuration database. Removing the app does not delete this configuration. When the app is re-added after updating, all of the previous configuration data will remain unchanged.

- i. Start by removing the app wherever it has been added. Ensure that you remove all instances of it or this will cause issues.
- ii. Remove the app, see [Removing the SharePoint app](#).
- iii. Re-add the app to the catalog, see [Add the app to the corporate catalog](#).
- iv. Re-add the app to the sites that require it, see [Add the app to the default site collection](#).

5.4 Upgrading from SharePoint 2010 Integration Solution

The Content Manager Governance and Compliance app for SharePoint was introduced in version 8.1. Although much of the functionality is similar to the Content Manager SharePoint Integration for

SharePoint 2010, it must be thought of as an entirely new product.

- **Supported upgrade path**

There is currently no supported true upgrade path. To move from a version of the Content Manager SharePoint Integration for SharePoint 2010 to the Content Manager Governance and Compliance app for SharePoint requires a complete removal and clean-up of the legacy Integration, performing the steps outlined in the Microsoft guides for upgrading SharePoint 2010 to SharePoint 2013 or later versions, and finally following the steps in this guide for preparing SharePoint for Apps.

- SharePoint 2010

The Content Manager SharePoint Integration for SharePoint 2010 is a legacy product. It is not possible to use the Content Manager Governance and Compliance app in SharePoint 2010, only 2013 and later versions.

If the intention is to upgrade to SharePoint 2013 or later versions, you must:

1. Read this blog article for latest information on how to remove the legacy Content Manager SharePoint Integration from SharePoint 2010:

<http://www.imsharepoint.net/blog/2017/6/21/how-to-upgrade-from-sharepoint-2010-integration-solution-to-sharepoint-2013-integration-app>

2. Upgrade SharePoint 2010 to SharePoint 2013 or later versions.
3. Install the Content Manager Governance and Compliance app.

- **Configuration data**

As the process of moving from the legacy Integration to the Integration app version is not a true upgrade, any configuration that has been made in an existing installation will be lost and will need to be recreated once the Integration app has been successfully installed.

If configuration data needs to be replicated in the Integration app version then you will need to document the existing configuration data. This includes:

- Site collection integration settings
- Records management options that are not default values
- Custom lifetime management policies
- Lifetime management options
- Content type to record type mappings
- Custom column mappings (the default ones will be created automatically)
- Exposure settings for lists that expose Content Manager content

NOTE: Record type to content type mappings are not supported in the Integration app version.

- **Removing the legacy SharePoint 2010**

Before making any changes to the deployed Integration solution please read this blog article for latest information required to perform the removal and clean up steps:
<http://www.imsharepoint.net/blog/2017/6/21/how-to-upgrade-from-sharepoint-2010-integration-solution-to-sharepoint-2013-integration-app>

CAUTION: Do not deactivate any features or retract the solution from SharePoint web app.

Identify where the Content Manager solution is deployed

Make a list of the full URLs of every web application in the farm that the Content Manager SharePoint 2010 Integration has been deployed to.

In SharePoint 2010 this solution is hprecordsmanager.14.wsp.

In SharePoint 2013 this solution is hprecordsmanager.15.wsp

You will need to read this blog article for latest information and execute the steps against every web application that has the solution deployed:

<http://www.imsharepoint.net/blog/2017/6/21/how-to-upgrade-from-sharepoint-2010-integration-solution-to-sharepoint-2013-integration-app>

- **Upgrade SharePoint**

If moving from SharePoint 2010, perform the necessary steps to upgrade to SharePoint 2013 SP1.

- **Installing the new version**

Follow this document to install the Content Manager Governance and Compliance app.

6 Uninstalling the integration components

Uninstalling the integration components involves the following steps:

1. Removing the SharePoint app

a. Remove from all sites


For every site that the Content Manager Governance and Compliance app is added to, it must be removed.

You can either do this manually, navigating to each site, to site contents, and then removing the Content Manager Governance and Compliance app, or you can use PowerShell to automate removal.

See the [Remove Content Manager app from all sites and site collections in a web application](#) section for an example script. This script will write a list of all locations that the app was removed from.

b. Remove from the corporate app catalog

- i. Navigate to the app catalog in use, select the app and delete it.

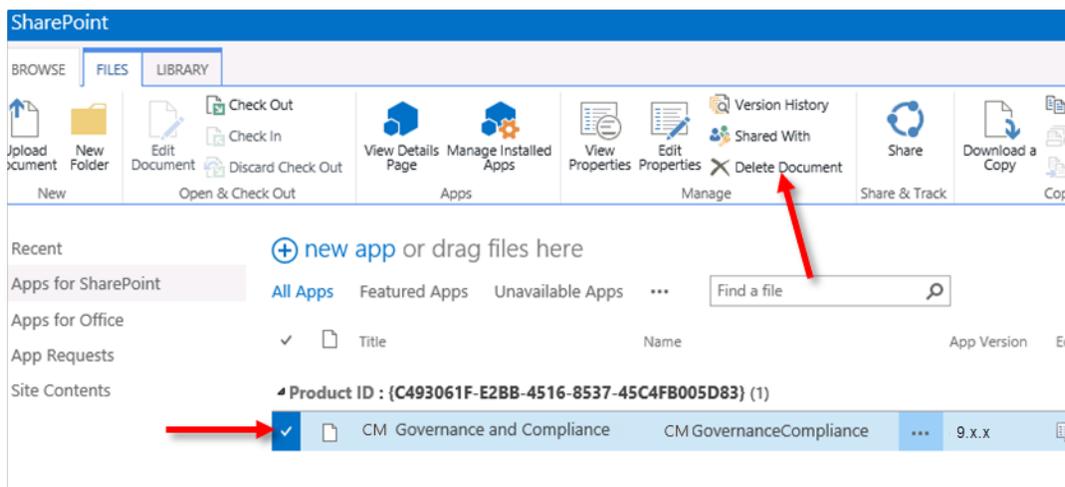

- ii. Ensure that the app has been removed from the first and second stage recycle bins. From the app catalog navigate to **Site Settings**.
- iii. Click the **Recycle bin** link under **Site Collection Administration**.
If the recycle bin contains an instance of the app, either select it and use the **Delete Selection** or simply use the **Empty Recycle Bin** link.
- iv. Click **Deleted from end user Recycle Bin** link.
If the recycle bin contains an instance of the app, select it and use the **Delete Selection**.


2. Remove the Content Manager Components

The removal of Content Manager SharePoint components must be performed on every server in the Content Manager farm.

a. **Uninstallation**

The removal of the components installed on the Content Manager workgroup server can be instigated through the machine **Add or remove programs** feature.

Select the **Content Manager Integration for SharePoint** entry in the **Add or remove programs** and click the **Uninstall** button.

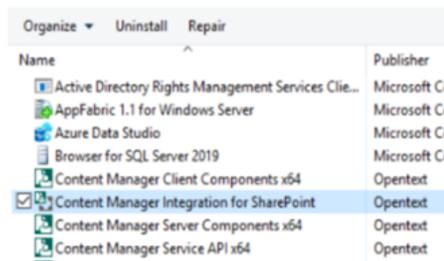

b. **Manual removal of remaining files**

In some cases, there will be files remaining after the installation has completed.

To remove them, navigate to the installation directory. By default this is:

[Program Files]\Micro Focus\Content Manager\Content Manager SharePoint Integration

Delete this directory to remove all remaining files.

c. **Remove any shared Content Manager farms**

Any shared Content Manager farms created must be manually removed. See the [Removing a shared Content Manager farm](#) section for details.

Appendix

The following are the sections:

- [Performance planning](#)
- [General administration tasks](#)
- [SharePoint administration tasks](#)
- [Troubleshooting](#)
- [PowerShell Scripts examples](#)
- [Custom Claims Implementation](#)
- [Upgrade the Content Manager 8.3 Farm database](#)
- [Additional configuration for a multi domain ADFS setup](#)

A: Performance planning

This section provides information that allows you to calculate hardware requirements for Content Manager as well as performance configuration requirements for SharePoint itself.

Working of Content Manager Governance and Compliance app

The Content Manager Governance and Compliance app uses a centralized job queue, to manage and action requests from multiple web applications and site collections. The benefits of using a queue are:

- Improved user experience - A virtual elimination of waiting times for users performing management and configuration actions. Even though an action may impact thousands of SharePoint items, the user will not have to wait for that action to complete, and can carry on working. The action itself is carried out asynchronously in the background.
- Failover protection – With multiple servers in the Content Manager farm, if one server goes down, the other will continue to process jobs, with no interruption in service.
- Robustness – If jobs fail for any reason, an automatic mechanism retries the job a number of times.
- Scalable – Jobs are processed as resources become available. Scale up and out are both supported to manage workload.

Jobs

A job is raised for a number of different actions performed in day-to-day interaction with the Content Manager Governance and Compliance app. When a job is raised, it is added to the job queue in a pending state. The job service takes jobs in a pending state and processes them. A job can either perform a single, or multiple tasks, and includes actual management of content along with configuration tasks (Applying Lifetime Management Policies, Content Type mappings etc.).

- **Single instance jobs**

Single instance jobs are jobs that are raised to perform a job that only needs to be performed once. For example, a request to manage an item is carried out by a single instance job.

These types of jobs form the bulk of the jobs raised in day-to-day operation.

- **Recurring jobs**

Recurring jobs are jobs that perform actions that need to be repeatedly run automatically at a pre-defined interval. These jobs will always have instances in the scheduled view, and do not require any manual intervention. Once a recurring job runs, it automatically adds another instance of itself in a pending state, to be run at a scheduled time.

Job queue

The job queue is a centralized list of all jobs in the Content Manager Farm, it includes all jobs that are due to be processed, are currently running, have completed or have failed. The queue is also a useful area to identify any issues with the Content Manager Governance and Compliance app, information from the queue can help administrators and Content Manager Support to understand the nature of


the problem. It can also be used to understand how the app is being used, where content in SharePoint is being managed, and who is raising manual management actions. It is only possible to see jobs for the particular tenant's job queue.

Distribution of jobs

The job queue is accessible by all the servers in the Content Manager farm. That is, all workgroup servers that have the Content Manager integration for SharePoint installed and configured on them.

Each server runs the Content Manager SharePoint Service, as a local Windows service. This is responsible for coordinating the job queue. The number of jobs that a server can run concurrently is based on the value entered in the configuration tool for the server's Maximum job count property. If a server is not currently processing its maximum number of jobs, it will take jobs from the job queue to process.

In the following example, both servers are configured with a Maximum job count of 5.

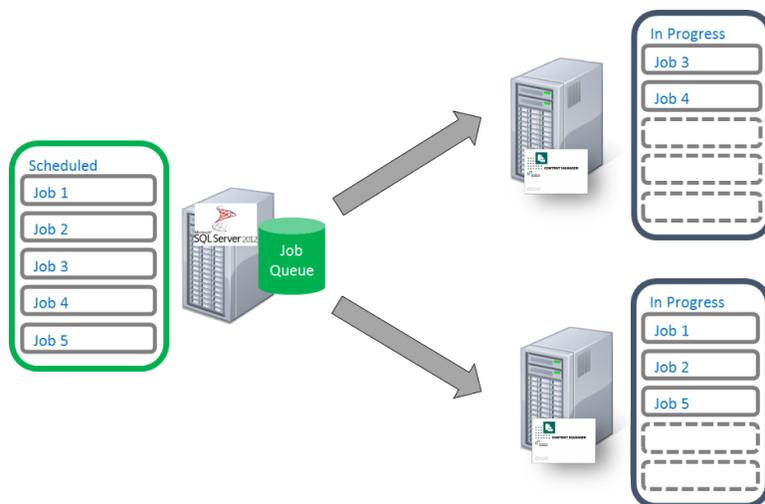

This means that the maximum number of concurrent running jobs equal to the sum of the Maximum job count for all servers you have configured in the Content Manager farm.

Job prioritization

Jobs are predominantly processed in the order that they are added to the queue, however, some types of jobs are given priority over other jobs. The following are the general guidelines that are used to determine the priority of a job.

1. Respond to direct management requests or changes that trigger LMPs as soon as possible
2. Correct anything that affects security as soon as possible
3. Perform administration style jobs when resources permit but ahead of backlog jobs
4. Perform backlog jobs (ie processing LMPs on existing content at the time of application of a LMP) when resources permit

Increasing the number of jobs that are processed

In the example above, because both servers are configured with a Maximum job count of 5, the maximum number of jobs that will ever be processed simultaneously is 10. To increase the number of jobs processed, consider the following:

- **Adding workgroup servers to the farm**

Adding additional workgroup servers to the farm provides a simple mechanism for scaling out the job queue processing capacity. In the previous example, adding a third workgroup server would result in a total of 15 jobs that could be processed simultaneously.

- **Increasing the number of jobs a server can process**

The configuration tool used for the Content Manager Governance and Compliance app allows specifying how many jobs each workgroup server should process simultaneously. It is possible to specify varying numbers for each server to accommodate the individual capacity of each.

The number of jobs that a workgroup server can process will be limited by the resources of that machine. When the processor and memory use is at capacity for that machine, increasing the number of jobs processed by that machine beyond that point will not result in any performance gain as all jobs will simply take longer resulting in the same throughput.

TIP: The number of jobs being processed should not cause the resource usage to be consistently more than 80% of machine capacity.

- **Considering SharePoint's capacity**

The number of requests that SharePoint can accept for a particular app is deliberately limited using a process called throttling. Throttling prevents one particular app from consuming too many SharePoint resources.

When throttling occurs, SharePoint will deny access to the app for a period of time. During this time it returns the following errors:

HTTP/1.1 429 Too Many Requests

Additionally, in the ULS logs, the following messages are included:

```
ResourceBudgetExceeded, sending throttled status code.
Exception=Microsoft.SharePoint.SPResourceBudgetExceededException:
ResourceBudgetExceeded at
Microsoft.SharePoint.SPResourceTally.Check(Int32 value) at
Microsoft.SharePoint.SPAggregateResourceTally.Check(SPResourceKind kind, Int32
value) at Microsoft.SharePoint.Client.SPClientServiceHost.OnBeginRequest()
```

Throttling is performed at a web application level. This means that if an app is being throttled on one site collection, all other site collections on that web app are also subject to throttling.

When the number of jobs being processed by the Content Manager Governance and Compliance app is high, SharePoint throttling can be encountered.

- **Modifying SharePoint's throttling level**

It is possible to increase the point at which SharePoint will throttle requests. This involves modifying the amount of time that a sustained number of app requests can access SharePoint before throttling occurs. By default, this value is 150000ms.

For on premise installations, you can increase this value using the following Powershell script (this example will increase to 450000ms):

```
$webapp = Get-SPWebApplication -Identity http://< web app url>
$webapp.AppResourceTrackingSettings.Rules.Add(
[Microsoft.SharePoint.SPResourceKind]::ClientServiceRequestDuration, 450000,
450000)
```

Increasing this value helps in situations where job processing is not consistently high and only have periods of high workload.

Where SharePoint throttling becomes an issue due to consistently high numbers of jobs, throttling can be disabled altogether using the following script:

```
$webapp = Get-SPWebApplication -Identity http://<web app url>
$rule = $webapp.AppResourceTrackingSettings.Rules.Get(
[Microsoft.SharePoint.SPResourceKind]::ClientServiceRequestDuration)
rule.Remove()
```

It is not possible to modify throttling in SharePoint Online. The following article describes SharePoint Online throttling: <https://msdn.microsoft.com/en-us/library/office/dn889829.aspx>

- **Adding servers to the SharePoint farm**

During peak job processing periods, the resource usage of SharePoint servers will be increased. Should the resources be found to be consistently over 80% utilization, the addition of more servers to the SharePoint farm will result in the ability to process jobs faster.

- **Automatic job throttling**

The processing of jobs will automatically throttle the number of jobs being processed when SharePoint throttling is encountered. Jobs will pause for a period of time while waiting for SharePoint to finish the throttling period.

If, after restarting, SharePoint throttling is encountered again, the number of jobs being processed simultaneously is reduced by 20%. This change will be reflected in the value of simultaneous jobs configured in the configuration tool.

If throttling is continually encountered, the number of processing jobs will continue to be reduced by 20% down to a minimum of 10 simultaneous jobs.

Job removal

When a Tenant is removed from the Configuration Tool Tenant Settings or a trial period expires all pending jobs for that customer will be removed and no new jobs will be created.

Implementation

Implementation of the Content Manager Governance and Compliance app usually occurs on an already established SharePoint implementation. The implementation can be considered to occur in three phases:

1. Backlog phase

An existing SharePoint farm will have existing content. Usually the Content Manager governance and compliance app is being implemented not only to provide governance to future content but also for existing content. During initial implementation there may be a large amount of content that needs to be governed that is disproportionate to the typical amount of content to be dealt with.

For example, at implementation time, an organization may have 1 Million items that need to be managed however, on average they only expect 250k new items to be created every year.

The period of time where this existing content is being managed is referred to as the **Backlog phase**.

It is important to separate this phase as a significant number of additional servers may be required during this time to complete the backlog phase in the time expected by the organization.

NOTE: For new SharePoint implementations, there is no backlog phase.

2. Ongoing phase

Once the backlog of existing content has been completed, the phase that refers to the “business as usual” management of content being created on a day to day basis is referred to as the **Ongoing phase**.

3. Crossover phase

There is usually a period where both the backlog and the ongoing phase are concurrent. During initial implementation, whilst the existing content is being governed, users are still in a “business as usual” stage where new content is being created. This period is referred to as the **Crossover phase**.

NOTE: For new SharePoint implementations, there is no crossover phase.

Hardware calculations

The size of the necessary hardware will vary significantly from organization to organization. It is dependent on a number of factors. This section provides guidance for how to determine the number of servers that are necessary.

NOTE: Regardless of the number of servers calculated using these metrics, it is strongly recommended that a minimum of two Content Manager servers are always employed to provide failover protection should one server become unavailable.

Machine specifications

Figures quoted in this section are based on servers with the following specifications:

Processor	Quad core 2.6Ghz
RAM	16Gb

Required timeframes

It is important to understand what metrics need to be achieved. The following are the key metrics:

Backlog phase duration: how long can be allocated for the backlog phase to complete

Management delay: during the ongoing phase, how long is acceptable as a duration from the point where an item becomes eligible to be managed (either via LMP or manually) till it is actually managed.

Content sizing

Understanding the size and the amount of content both initially and ongoing is key to determining the resource requirements. You will need to know the following information, in order to determine hardware requirements:

1. Content sizing – backlog phase

- **Total content sizing**

The details in this section are about the size of the current SharePoint implementation. This is all current content, regardless of whether the content is to become a record or not.

	Value
Number of SharePoint farms	
Total number of site collections	
Total number of documents	
Total number of metadata items	

- **Managed content sizing**

The details in this section describe the portion of the total content sizing that is expected to become a record during the backlog phase.

	Value
Total number of documents	
Total number of metadata items	

- **Relocated content sizing**

The details in this section describe the portion of the total content sizing that is expected to be relocated or archived during the backlog phase.

	Value
Total number of documents	
Average document size	

2. Content sizing – ongoing phase

- **Total content sizing**

The details in this section describe the expected amount of content to be created during the ongoing phase, regardless of whether it is to become a record or not.

	Value
Total documents added per day	
Total metadata items added per day	

- **Managed content sizing**

The details in this section describe the expected amount of content to be created during the ongoing phase, that will become a record.

	Value
Total number of documents per day	
Total number of metadata items per day	

- **Relocated content sizing**

The details in this section describe the portion of the total content sizing that is expected to be relocated or archived during the backlog phase.

	Value
Total number of documents	
Average document size	

Performance metrics used

The following describe the rate of processing by the Content Manager Governance and Compliance app for various tasks. All values are based on one server only.

- **Application of LMPs**

This is the application of LMPs to existing content. This does not include the time taken to apply management to the item. Management processes must be considered in addition to the application of LMPs.

Items per minute	200
Items per hour	12000
Items per day	288000

- **In place manage/finalize (no security)**

This is the management or finalization of an item where security is not turned on for the site.

Items per minute	33
Items per hour	1980
Items per day	47520

- **In place manage/finalize (with security)**

This is the management or finalization of an item where security is turned on for the site.

Items per minute	23
Items per hour	1411
Items per day	33864

- **Relocate/archive documents**

This is the relocation or archiving of an item that has a 500Kb document associated with it.

Items per minute	24
Items per hour	1440
Items per day	34560

- **Relocate/archive metadata items**

This is the relocation or archiving of an item that does not have a document associated with it.

Items per minute	29
Items per hour	1777
Items per day	42648

Backlog phase calculations

Calculating the required number of servers to complete the backlog requires determining the requirements for applying LMPs and the requirements for processing actions from the LMP. Using the performance metrics, it can be calculated how many days a single server would take to perform each task.

Once this duration has been calculated, then it is divided by the number days that the backlog duration should take to determine the number of servers. In the examples below, a backlog duration of 30 days has been used.

NOTE: All tables in the following sections contain example figures. Items per day has been calculated using the metrics in the [Performance metrics used](#) section.

- **Application of LMPs to all items**

Total items	42M document + 2.3M metadata = 44.3M
Items per day	288000
Single server time	154 days
Servers required to meet backlog duration	5.2

- **Management/finalization of non secure items**

Total items	242k document + 13k metadata = 255k
Items per day	47520
Single server time	6
Servers required to meet backlog duration	.2

- **Management/finalization of secure items**

Total items	100k document + 20k metadata = 120k
Items per day	33864
Single server time	4
Servers required to meet backlog duration	.2

- **Relocate/archive documents**

Total items	350k
Items per day	34560
Single server time	11
Servers required to meet backlog duration	.4

- **Relocate/archive metadata items**

Total items	50k
Items per day	42648
Single server time	2
Servers required to meet backlog duration	.1

- **Total number of servers**

Application of LMPs to all items	5.2
Management/finalization of non secure items	.2
Management/finalization of secure items	.2
Relocate/archive documents	.4
Relocate/archive metadata items	.1
Total Servers required to meet backlog duration	7 (rounded up from 6.1)

Ongoing phase calculations

The ongoing phase calculations are based on calculating how many items per minute require processing then dividing it by the per minute rate that is achievable by a single server. Then dividing that figure by the number of minutes that are acceptable for the management duration.

In the examples below, the management duration used is of 1 minute has been used.

NOTE: All tables in the following sections contain example figures.

- **Application of LMPs to all items**

Total items per month	16040000
Items per day	517419
Items per hour	21559
Items per minute	359
Single server rate/min	200
Servers required to meet metrics	1.8

- **Management/finalization of non secure items**

Total items per month	273250
Items per day	8814
Items per hour	367
Items per minute	6
Single server rate/min	33
Servers required to meet metrics	.2

- **Management/finalization of secure items**

Total items per month	273250
Items per day	8814
Items per hour	367
Items per minute	6
Single server rate/min	33
Servers required to meet metrics	.2

- **Relocate/archive documents**

Total items per month	500000
Items per day	16129
Items per hour	672
Items per minute	11
Single server rate/min	24
Servers required to meet metrics	.5

- **Relocate/archive metadata items**

Total items per month	26000
Items per day	838
Items per hour	34
Items per minute	1
Single server rate/min	29
Servers required to meet metrics	.1

- **Total number of servers**

Application of LMPs to all items	1.8
Management/finalization of non secure items	.2
Management/finalization of secure items	.2
Relocate/archive documents	.5
Relocate/archive metadata items	.1
Total Servers required to meet metrics	3 (rounded up from 2.8)

Crossover phase calculations

The total number of servers required during the cross over phase is the number calculated for the backlog phase plus the number required for the ongoing phase.

Using the examples in the previous sections, this organization would require 10 servers during the crossover phase.

NOTE: The example figures used are for a large organization creating a significant amount of content.

B: General administration tasks

AppFabric Cache

Installing AppFabric


NOTE: There are specific configurations required in AppFabric for Content Manager and SharePoint integration. If AppFabric is already installed, go to [Configuring AppFabric](#).

The Microsoft AppFabric framework must be installed on Content Manager Workgroup Servers, where the integration is installed (Content Manager Farm). This is used to provide configuration caching across multiple servers.

IMPORTANT: The link to download the AppFabric from Microsoft site is no longer available. OpenText Content Manager recommends to use Redis Cache. For details, see [Redis cache, on page 130](#).

If you still require AppFabric cache, contact the Support.

1. Run the AppFabric installer as Administrator. You can accept all the install wizard defaults, until you reach the **Features** page.
2. Select all of the options.

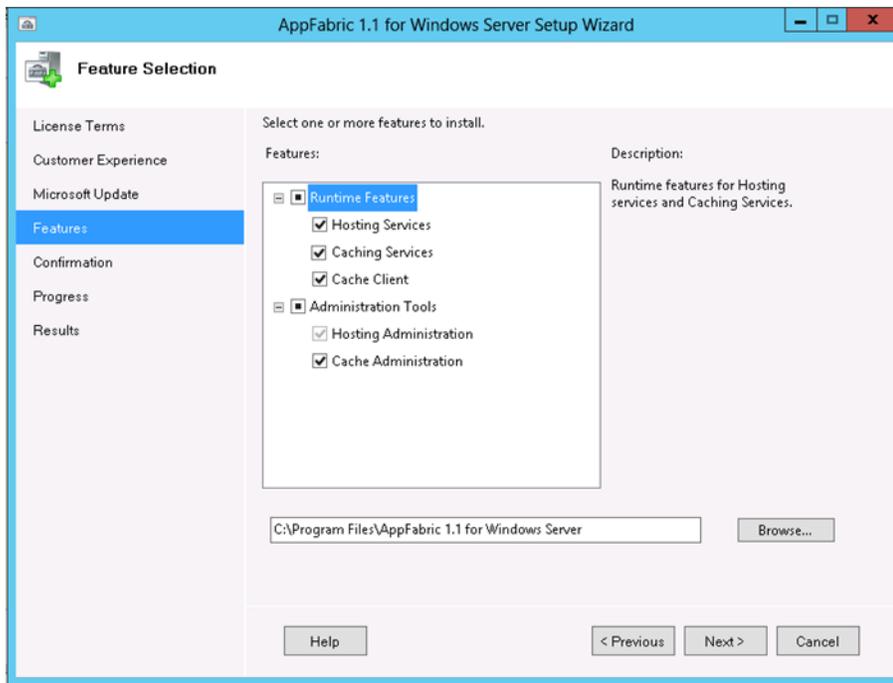


Complete the rest of the wizard with default settings to install AppFabric.


Configuring AppFabric

The configuration wizard usually starts automatically after installation.


1. If already started, go to next step. If it fails to start, launch it manually from the Start menu, right-click **Configure App Fabric** and click **Run as administrator**.
2. On the initial page, accept the wizard defaults and click **Next**.

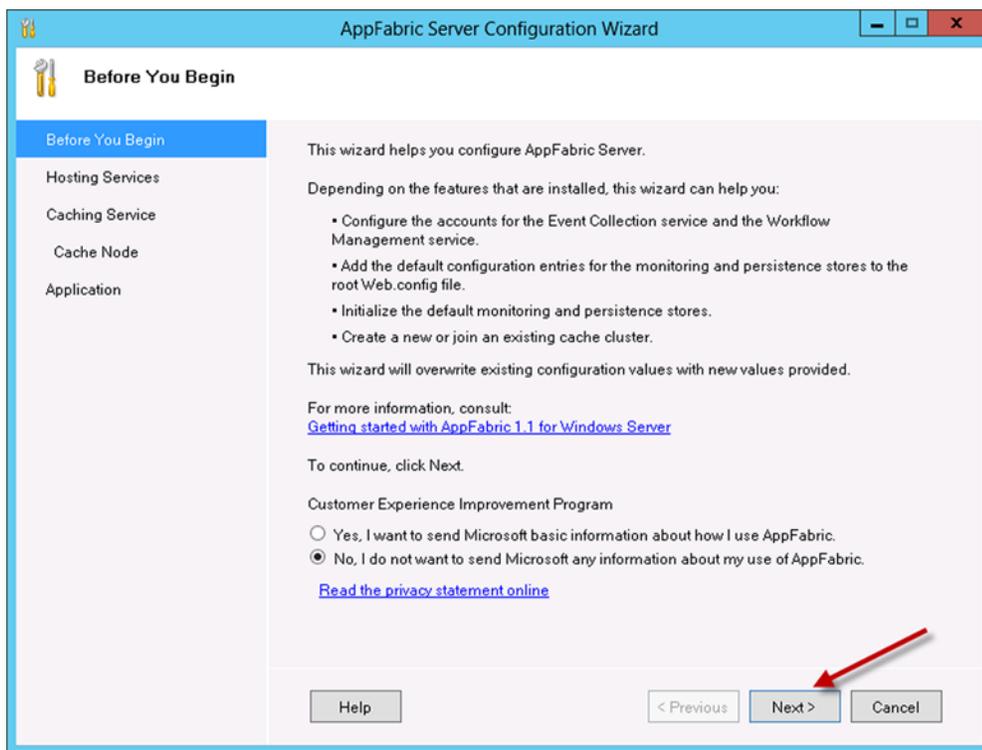


3. On the Hosting Services page, accept the defaults and click **Next**.

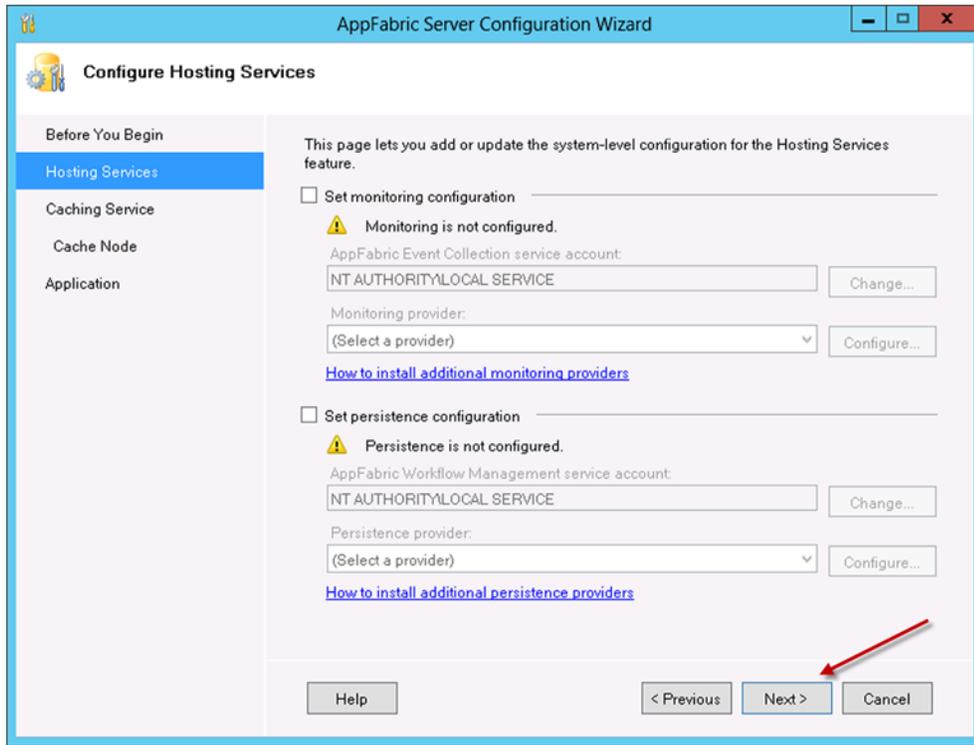


4. On the Caching Services page, select the **Set Caching Service configuration** checkbox and click the **Change**.

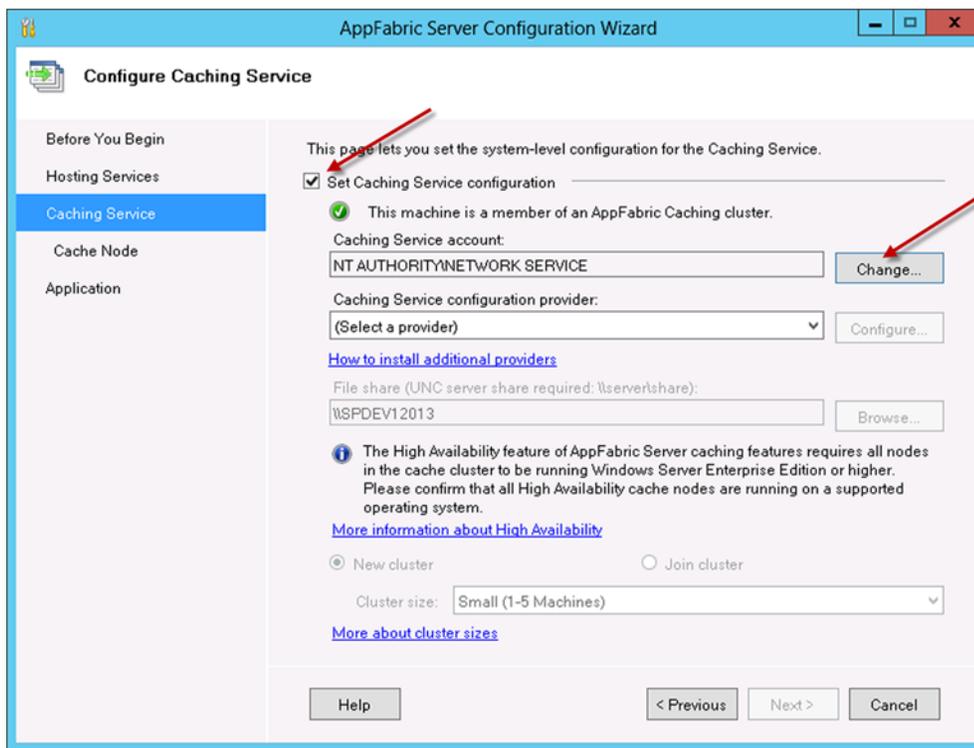

- On the select user dialog, choose the **Custom account** option. Nominate a domain account for the AppFabric Caching Service, enter the relevant password and click **OK**.

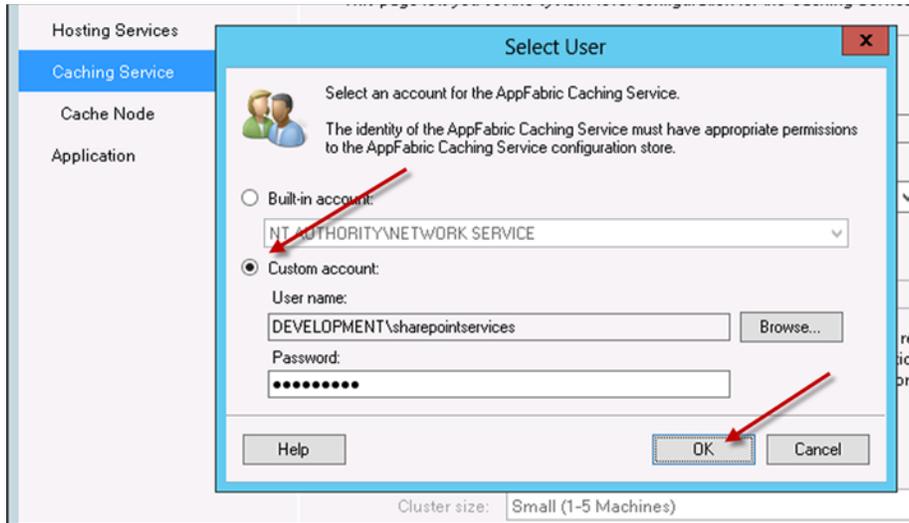


- Select a caching service configuration provider. Click on the **(Select a provider)** drop down, select **SQL Server AppFabric Caching Service Configuration Store Provider**, and click **Configure**.

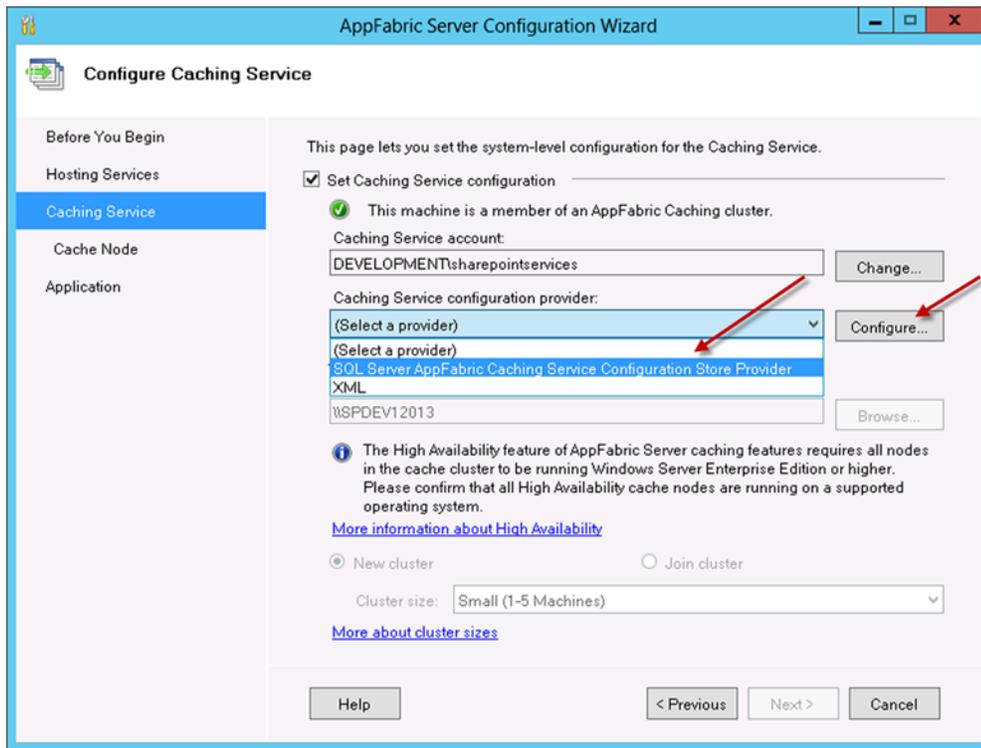


- On the **AppFabric Server Caching Service Configuration Store** dialog, select checkboxes for both:

- Register AppFabric Caching Service configuration database
- Create AppFabric Caching Service configuration database

Fill in your SQL Server name and provide a name for the caching configuration store database. The example given is **'CMCacheConfiguration'**, but you can use any name you deem appropriate. This will create a new database in SQL Server. Click **OK**.

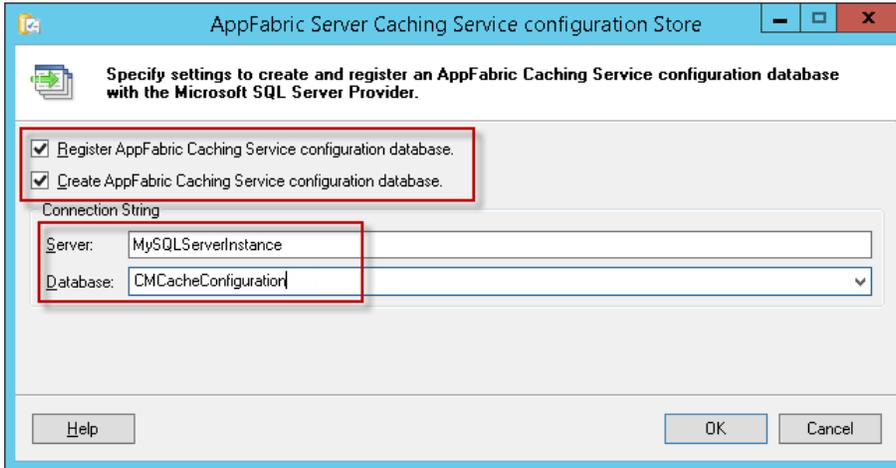


8. Click **Yes** in the following prompt.
9. Click **OK** in the confirmation dialog.
10. Select the option **New cluster** and the cluster size (The cluster size depends on the number of Content Manager Workgroup Servers in your farm). Choose the appropriate option to match the number of servers. Click **Next**.

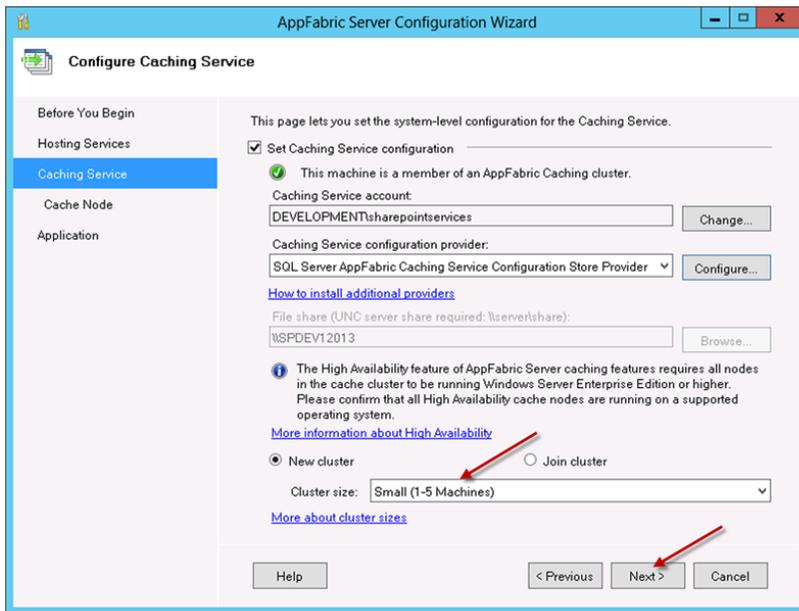

11. On the **Configure AppFabric Cache Node** page, if you have **Windows Firewall** enabled, select both checkboxes:
 - AppFabric Server AppFabric Caching Service
 - Remote Service Management

For other firewalls, you need to configure them manually to allow these ports, to enable communication between the SharePoint farm and Content Manager Servers. You will see a warning message, if the **Windows Firewall** is not enabled, click **Next**.

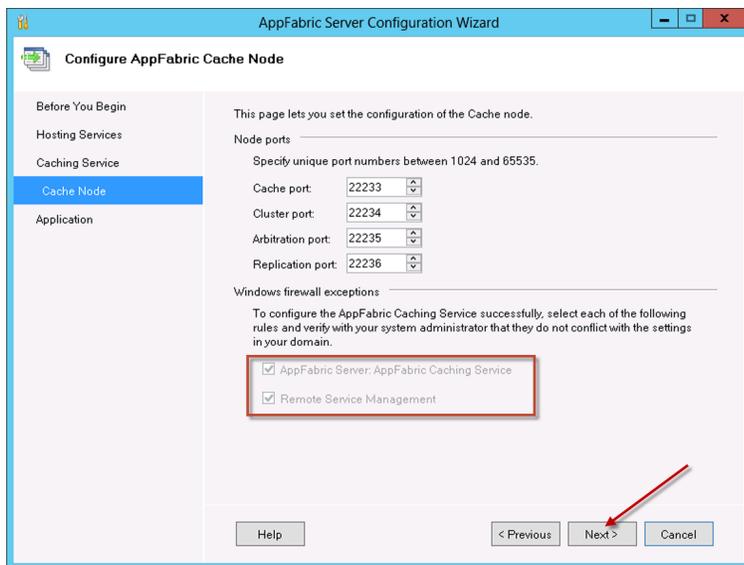


12. Click **Yes** in the configuration settings prompt.
13. A progress bar is displayed while the configuration settings are applied. Once this has completed, on the Application page, click **Finish**.


Joining a server to an existing cache cluster

1. Follow steps 1-6 from the [Configuring AppFabric, on page 122](#) section.
2. On the **AppFabric Server Caching Service Configuration Store** dialog:
 - a. Select the checkbox for **Register AppFabric Caching Service configuration database**.
 - b. Leave the **Create AppFabric Caching Service configuration database** option unselected. Fill in your SQL Server name and select the database you created during initial configuration.


c. Click **OK**.

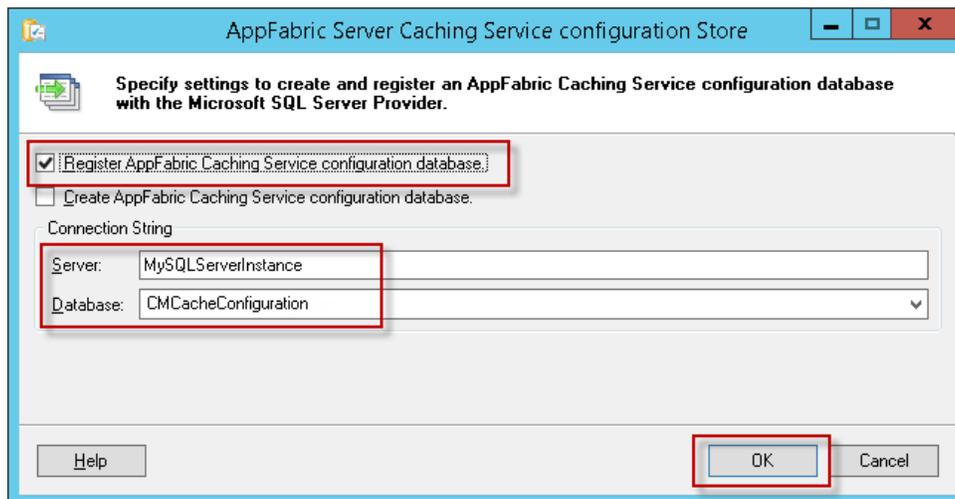

3. Click **Yes** in the following prompt.
4. Click **OK** in the confirmation dialog.
5. Select **Join cluster** option and Click **Next**.

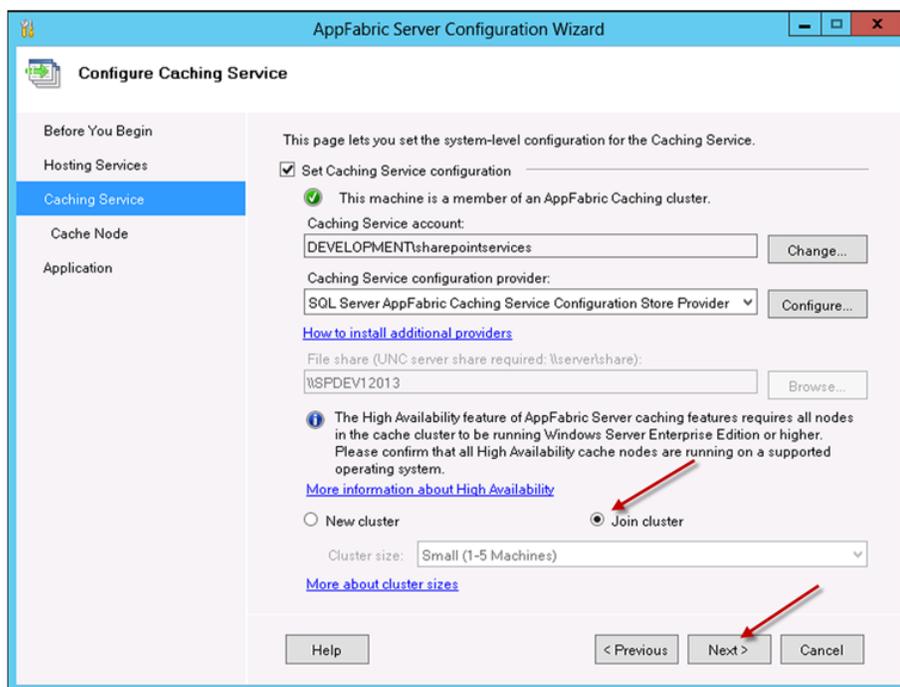

6. On the **Cache Node** page, click **Next**.
7. Click **Yes** on the configuration settings prompt.
8. A progress bar is displayed while the configuration settings are applied. Once this has completed, on the Application page, click **Finish**.

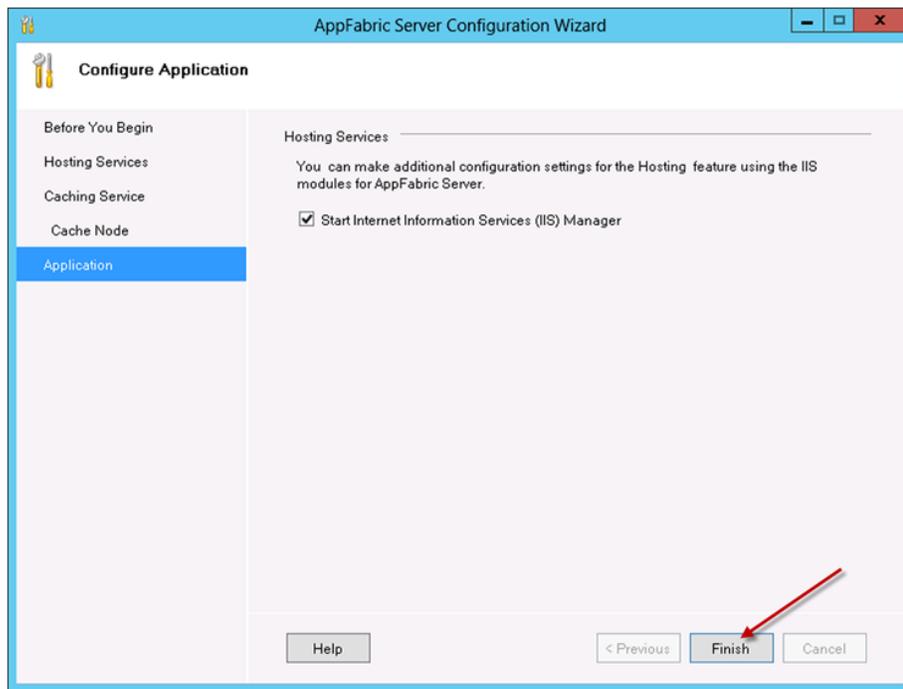

If AppFabric is already installed, an entry is made in the Programs and Features.

For troubleshooting issues with AppFabric, see the [Troubleshooting AppFabric](#) appendix.

Azure cache

The Azure cache capability is very much in flux at the moment, this section is up-to-date as of the publication date, but bear in mind that the cache creation process may change in the future.

NOTE: The managed cache PowerShell commands were added late May 2014, so if you already have Azure PowerShell installed and configured, make sure you update to the latest version.

There are two types of Azure caches that can be used:

- Managed
- Redis

The Redis cache is Microsoft's preferred cache to be used although both are still supported.

Managed cache

Creating a managed cache

Creating an **Azure Managed Cache** requires the use of Azure PowerShell. This is installed and configured on a local machine, and can be used to remotely administer/configure Azure.

1. To install **Windows Azure PowerShell**, go to <http://azure.microsoft.com/en-us/downloads/> and under the **Windows PowerShell** section, click on **Install**.

2. Once installed, run **Windows Azure PowerShell** and connect to your subscription. This is beyond the scope of this document, but this article describes the process of installation and configuration:

<http://azure.microsoft.com/en-us/documentation/articles/install-configure-powershell/>

To create an Azure cache for use by the integration, follow these steps:

1. Start **Windows Azure PowerShell** and connect to the appropriate subscription.
2. Run the following commands


NOTE: Change the location to match your Azure VMs region.

```
New-AzureManagedCache -Name cmcache -Location "East Asia" -Sku Basic -  
Memory 128MB  
Get-AzureManagedCache
```


3. This creates a cachename 'cmcache', in the region that you define, and once created returns the details of caches in the current subscription.
4. Once created, the cache can be managed from the Azure Management Portal.

Obtaining access keys


1. Select the cache you just created and click on the **MANAGE KEYS** option in the bottom toolbar.

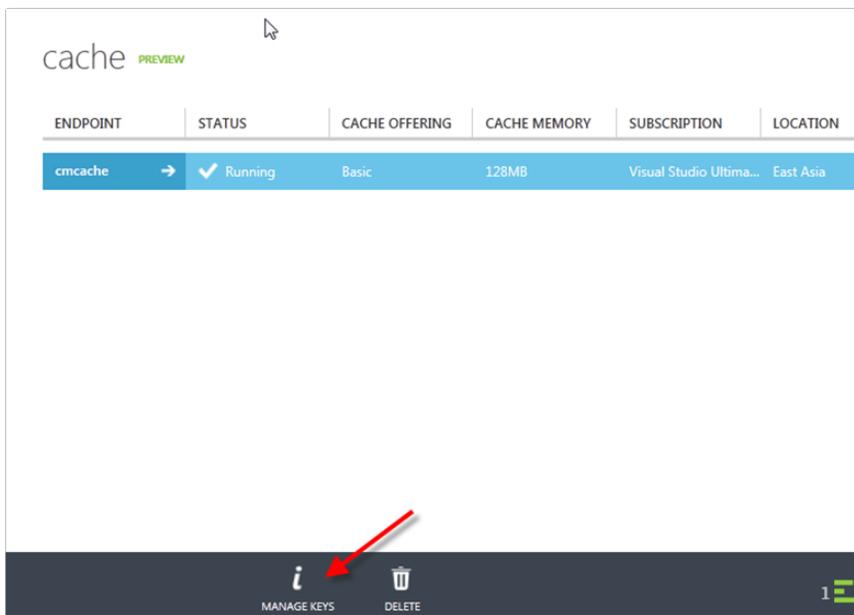

2. On the **Manage Access Keys** dialog, Click **Copy to Clipboard** next to the PRIMARY ACCESS KEY.

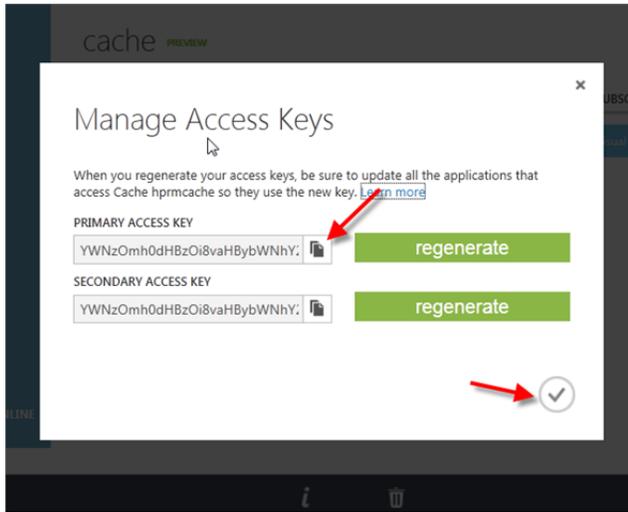

3. On the clipboard prompt, click **Allow access**.

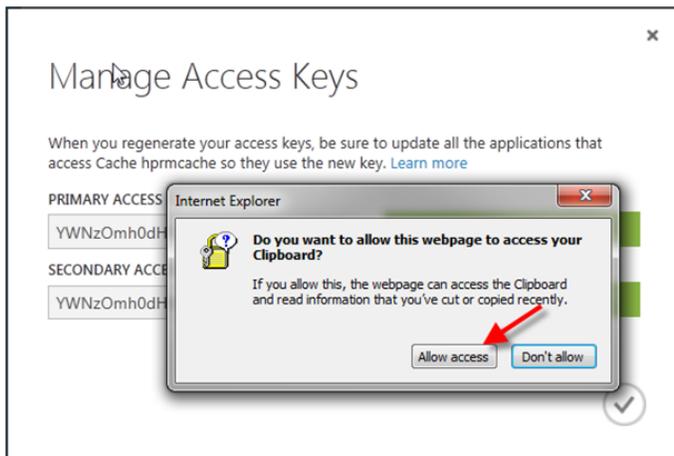

Redis cache

Creating a Redis cache

To create an Azure Redis cache, navigate to the Azure portal. At the time of writing, you must use the preview version of the portal to perform this task (<https://portal.azure.com>)

1. Log in to Azure portal and select **Create a resource**.
2. On the new page, select **Databases** and then select **Azure Cache for Redis**.
3. Complete the requested details to create the cache.

Obtaining endpoint and access keys

Log in to Azure portal and navigate to **All Resources > Redis cache > Overview** page.

^ Essentials

Resource group (change) ASQAGroup	Host name 191.231.255.100:6379
Status Running - Standard 1 GB	Ports Non-SSL port (6379) disabled
Location East US	Keys Show access keys...
Subscription (change) Visual Studio Enterprise	*Best practices* https://aka.ms/redis/p/bestpractices
Subscription ID 1946282f-bc40-40d6-bedf-6346888b7232	*New features* https://aka.ms/newfeatures

- **Endpoint:** The **Host name** is the Azure cache endpoint. Select and copy the value.
- **Primary access key:** Click the **Show access keys** link to reveal the keys in use.
- **Configured to use SSL:** To determine if Redis cache is configured to use SSL, under the **Ports** section the value of **Allow access only via SSL** will indicate if the cache is configured to only use SSL.

HTTPS


Enabling HTTPS for a site

To enable HTTPS for the **Content Manager SharePoint Server** website, you will first need to have obtained an SSL certificate, or use an existing SSL certificate for your internal domain. There are a number of options to obtain a certificate, the process of obtaining the certificate is beyond the scope of this document, and there are lots of publicly available articles from Microsoft detailing the process:


Certificate Type	Notes	Suitable For
Commercial SSL Certificate	Obtained from a commercial SSL vendor such as GoDaddy, Thawte, Verisign, Digicert etc. These have an annual cost associated, but ARE required to secure communication with SharePoint Online environments	On premise, and SharePoint Online
Domain Certificate	Issued from an internal Active Directory Certification Authority, these can be used (at no cost) to secure internal sites on premise	On premise only
Self-signed Certificate	Created within IIS, can be used in some scenarios (SharePoint High-Trust) for testing/development	Not suitable

The following steps assume you have a valid SSL certificate added to **IIS Server Certificates**, available for use.

1. Open **IIS Manager**, and navigate to the **Content Manager SharePoint Server** website.
2. Right click on the site name in the **Connections** pane, and choose **Edit Bindings**.
3. On the **Site Bindings** dialog, click **Add**.
4. On the **Add Site Binding** dialog, change the **Type** to **https** and then select your certificate in the **SSL certificate** drop-down. Click **OK**.

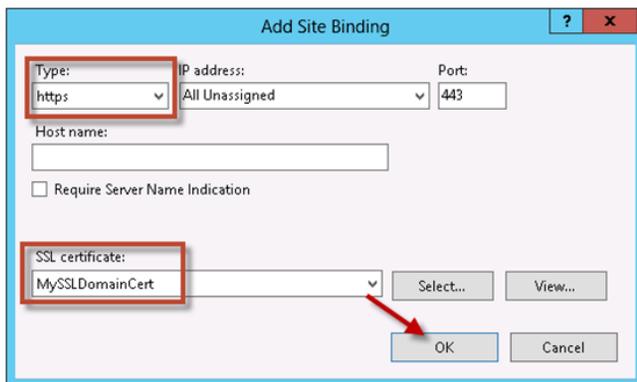

The **https** entry has been added. **Close** the **Site Bindings** dialog.

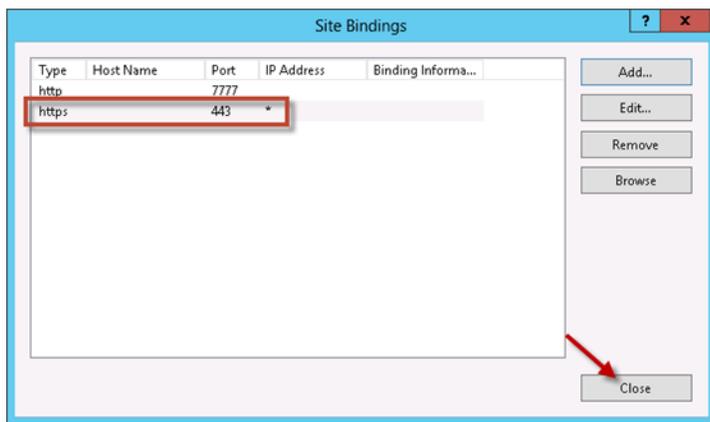

5. To test, open a browser and navigate to <https://<yourURL>/pages/dialogloader.html> where yourURL is your load balanced URL, or the name of the Content Manager server, or configured host header. You should see the 'Working on it' page, without any certificate errors.

The integration website is now configured to use HTTPS.

Disabling HTTP for a site

To remove the HTTP binding follow these steps:

NOTE: This can sometimes cause problems with an SSL secured integration website.


1. Open **IIS Manager**, and navigate to the **Content Manager SharePoint Server** website.
2. Right click on the site name in the **Connections** pane, and choose **Edit Bindings**.
3. On the **Site Bindings** dialog, select the **http** entry you want to remove and click **Remove**.
4. Click **Yes** on the confirmation prompt.
5. Confirm the **http** entry has been removed and click **Close** on the **Site Bindings** dialog.

Port


Opening a port

To open a port in the Windows Server 2012 Firewall, follow the steps:


1. Go to the Windows **Start** menu, and type 'firewall'.
2. Launch the **Windows Firewall** application.
3. In the left-hand navigation pane, click **Inbound Rules**. In the **Actions** pane, click on **New Rule**.

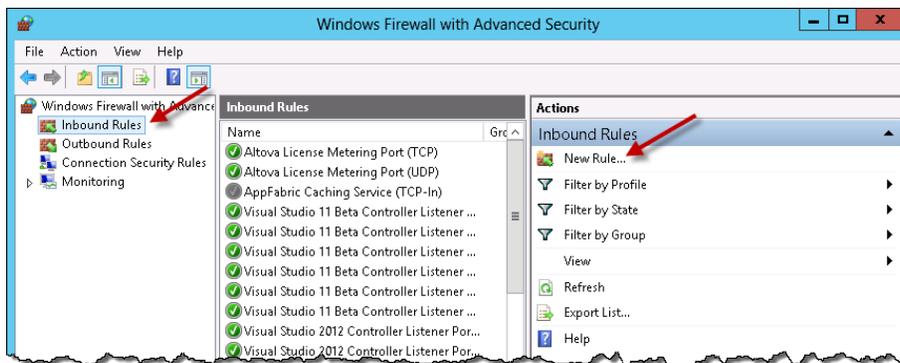


4. In the **New Inbound Rule Wizard**, choose **Port** and click **Next**.

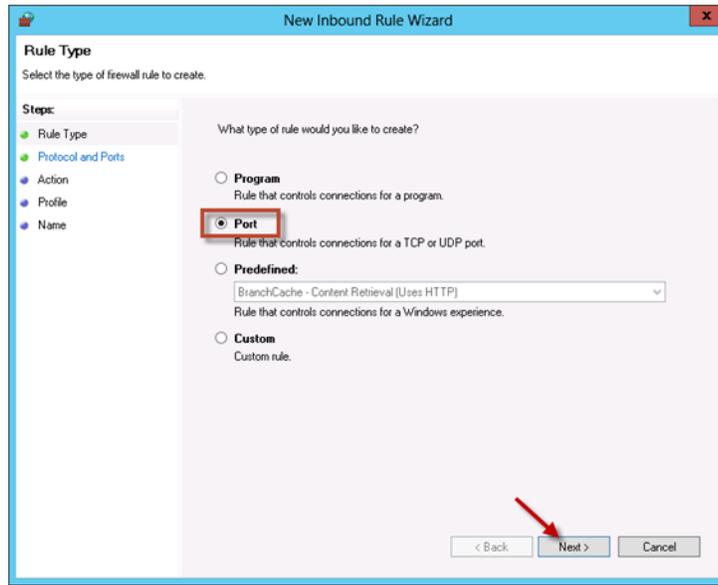


5. Make sure **TCP** is selected, and enter the specific port for the integration website. In this example, **port 22777** is being opened. Click **Next**.

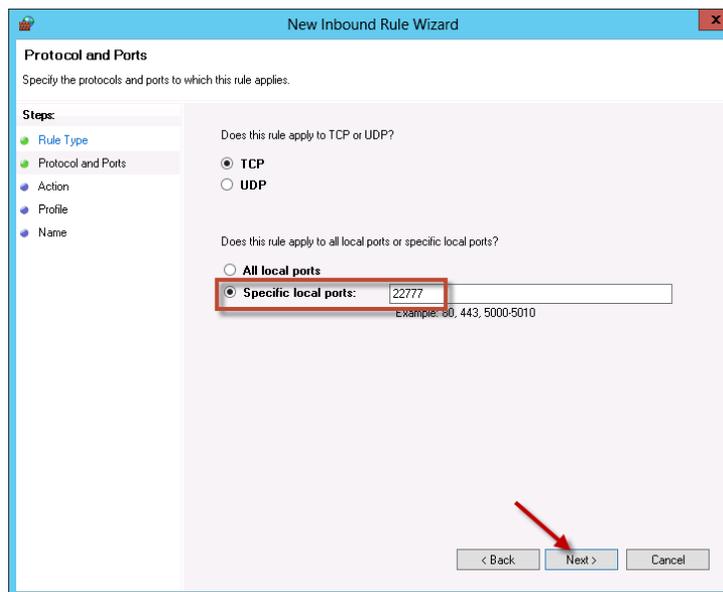


6. Accept the default option **Allow the connection** and click **Next**.

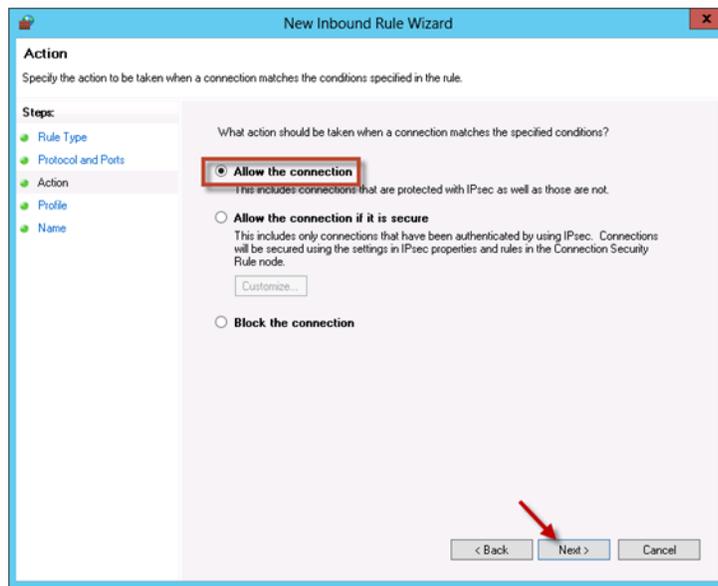

7. Choose which profile to apply the rule to (You may just want to apply to the **Domain** profile). Click **Next**.

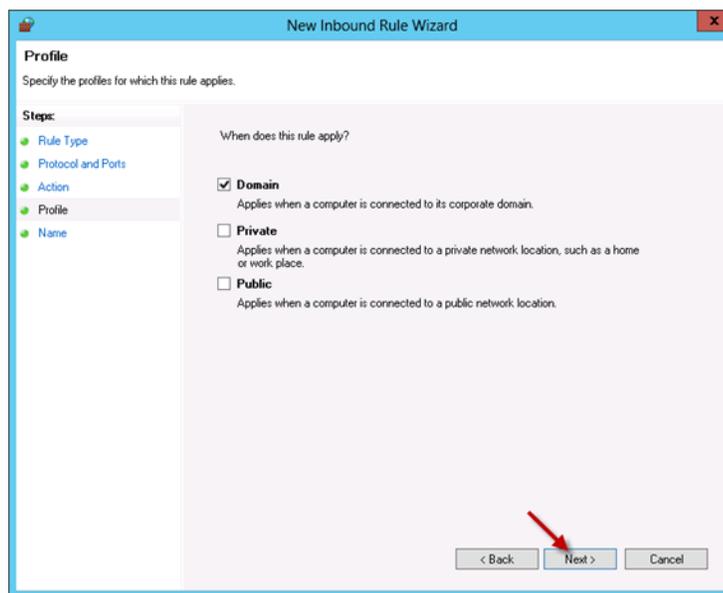


8. Give the rule a name e.g. 'Content Manager SharePoint Server website' and description. Click **Finish**.

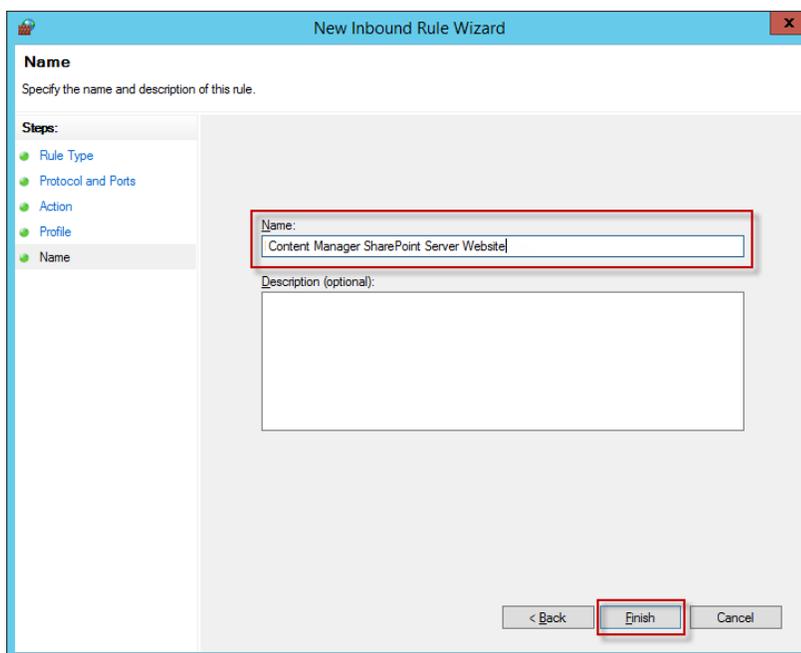

Determining ports in use by IIS

To determine which ports are already in use by existing IIS websites:

1. Open IIS Manager, and in the left-hand **Connections** pane, select the **Sites** node.
2. The list of websites, and their associated port bindings will be displayed in the main window.

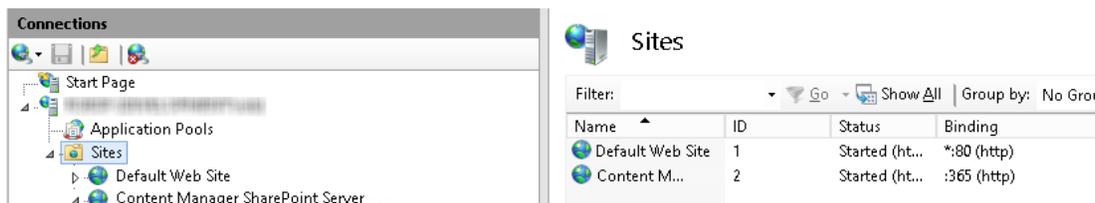

Alternatively, to display a list of all ports in use (Not just IIS websites), follow these steps:

1. Open a **cmd** prompt and type `netstat -a`
2. A list of active ports will be displayed.

Prepare record types

It is necessary to identify and configure the record types that will be used in Content Manager for managing SharePoint content.

Create SharePoint site and list record types


When managing content, a record is created to represent the site that the content resides on. Make sure to create "SharePoint site" and "SharePoint list" record types. Suitable record types must have a behavior in Content Manager. See, [Determining the behavior of a record type](#).

For more information, refer Content Manager documentation to create suitable SharePoint site and SharePoint list record types.

Mark record types as suitable

For a record type to be suitable for use when managing SharePoint content, it must be marked as being suitable. For each record type that is intended to be used to manage SharePoint content, it must be marked as being suitable. To mark the record type as suitable, follow the steps:

1. Double-click on the record type and click **Electronic** tab.
2. Ensure that this record type supports documents.
3. Check the **Records can be SharePoint List Item Records** check box.

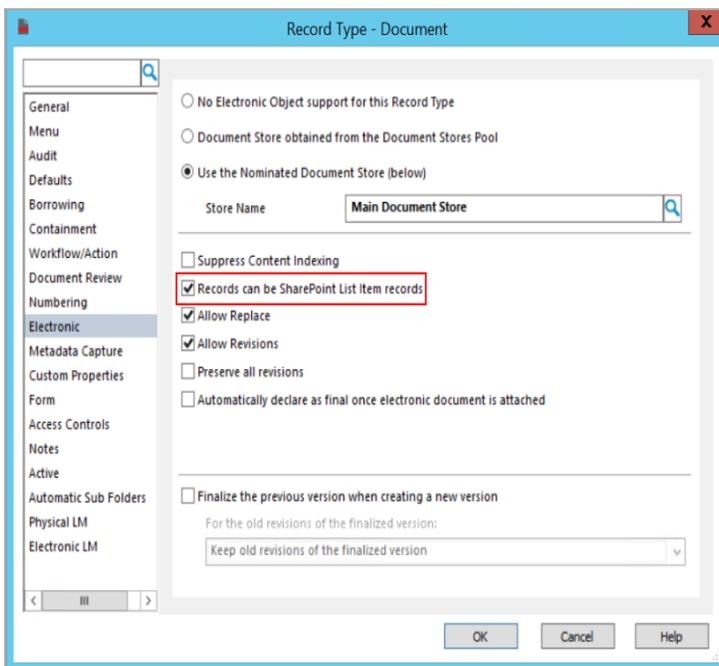

For details on how to access the list of record types, see the appendix [Accessing the list of record types](#).

Ensure suitable numbering patterns

It is important that the numbering pattern you use for your record types will not clash with existing numbering. Therefore, ensure that all record types that will be used for management of SharePoint content have unique numbering patterns and the next number to use is a number that is available.

This applies for record sub types that will be used to represent:

- List items
- Containers
- SharePoint lists
- SharePoint sites

For information regarding numbering patterns, see the Content Manager product documentation.

Accessing the list of record types

To access the list of **Record Types**:

1. Open Content Manager, opening the relevant dataset.
2. From the **Records** section of the **Tools** ribbon, click on **Record Types**.
3. A list of **Record Types** in the current dataset will be displayed.

Determining the behavior of a record type


To confirm the behavior for a given **Record Type**:

1. Open Content Manager, opening the relevant dataset.
2. From the **Records** section of the **Tools** ribbon, click on **Record Types**.
3. Double-click an existing record type in the list to open up the properties page, or right-click in white space and choose **New Record Type** to create a new one.
4. On the **General** tab you can see the existing Behavior in the drop-down. Change this to the desired behavior and click **OK** to save.

Setting the permissions granted to a user type

It is possible to modify the permissions that are granted by default to a user type in Content Manager. From the **Administration** tab, select the **System** button.

Select the **User Types** tab. Select the User Type to be modified then add or remove the permissions to build the required default permission set for that type of user. Click **OK** to save these settings.

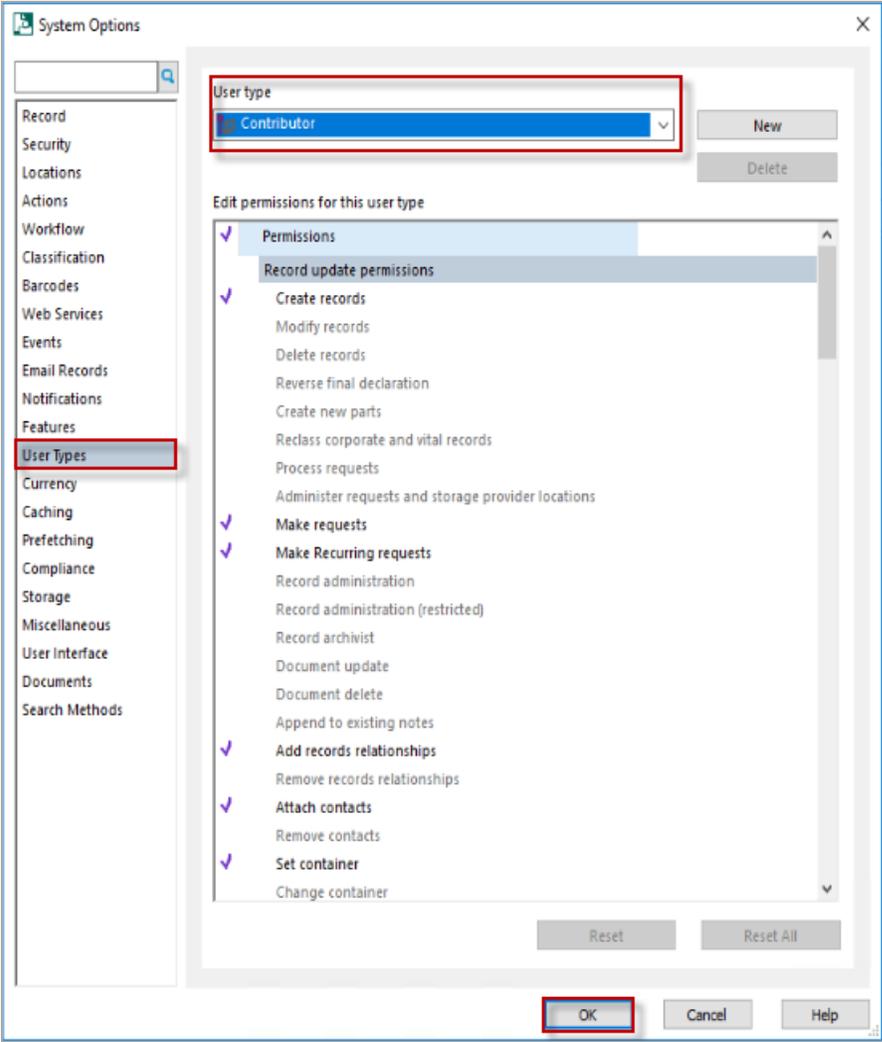


C: SharePoint administration tasks


Identifying the app catalog in use

1. SharePoint Online

- a. Login to your Office 365/SharePoint Online portal, as a tenant administrator, and click **SharePoint** menu item.

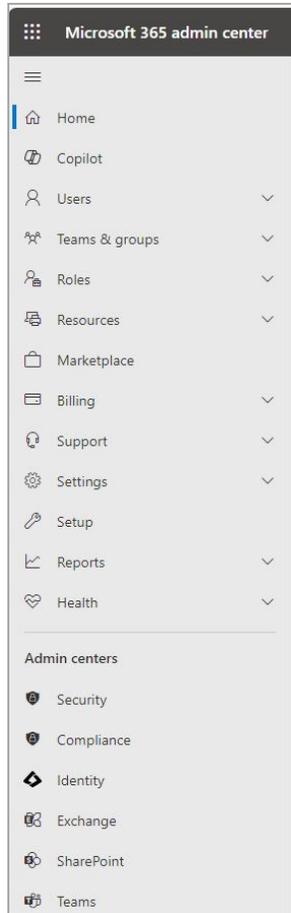


- b. Click **More** feature in the SharePoint admin center menu.

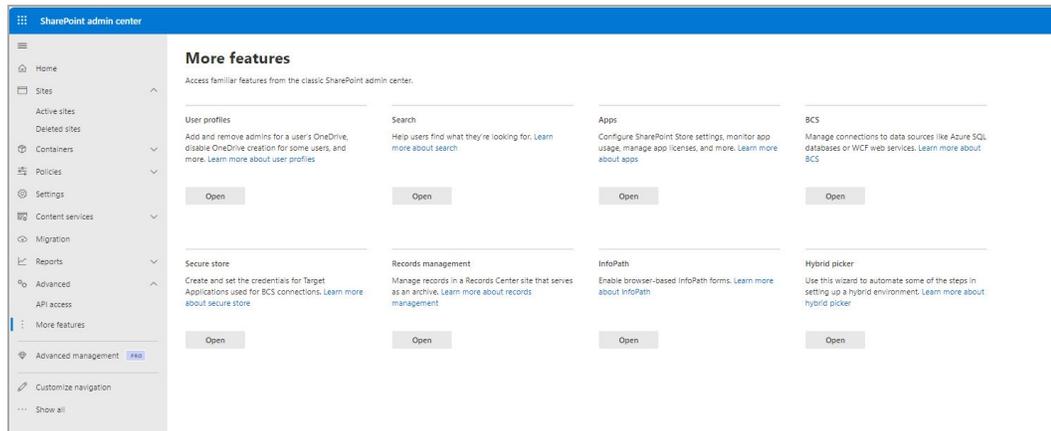


c. Click **Open** under **Apps**.

The Apps for SharePoint or Manage Apps page is displayed.

For Classic UI

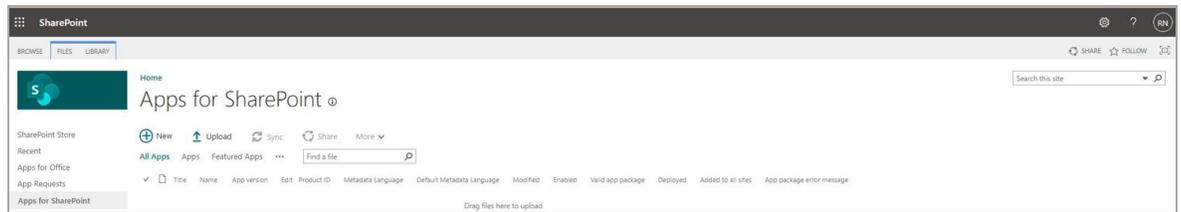

For Modern UI

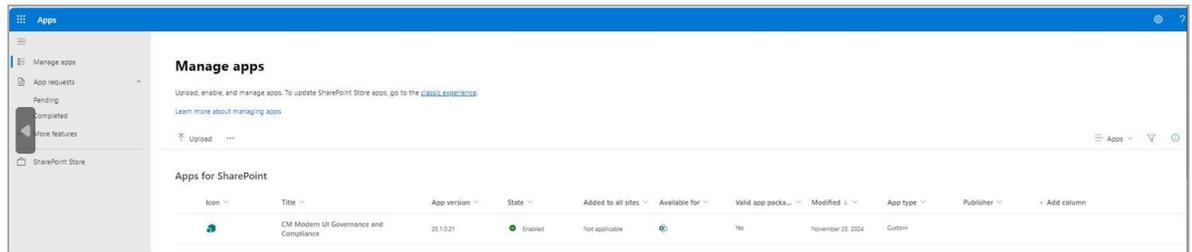

Creating an app catalog

1. SharePoint Online

NOTE: For SharePoint Online, by default Microsoft provides the Tenant Appstore/App catalog. If it is not provided, you must contact Microsoft to get it.

Working with the term store

1. Accessing the term store –

a. SharePoint Online


- i. Login in to SharePoint Tenant or Default Site Collection as Tenant Administrator.
- ii. Go to **Site Settings** and click **Term store management** under **Site Administration**.
- iii. Switch to Classic view for **Term store management** page.

2. Adding a term store administrator

This process is the same, whether on premise, or on SharePoint Online.

Make sure you have the root of the term store selected in the left-hand pane.


Enter the appropriate account into the **Term Store Administrators** field, check the account using the tick icon, then click **Save** to apply.

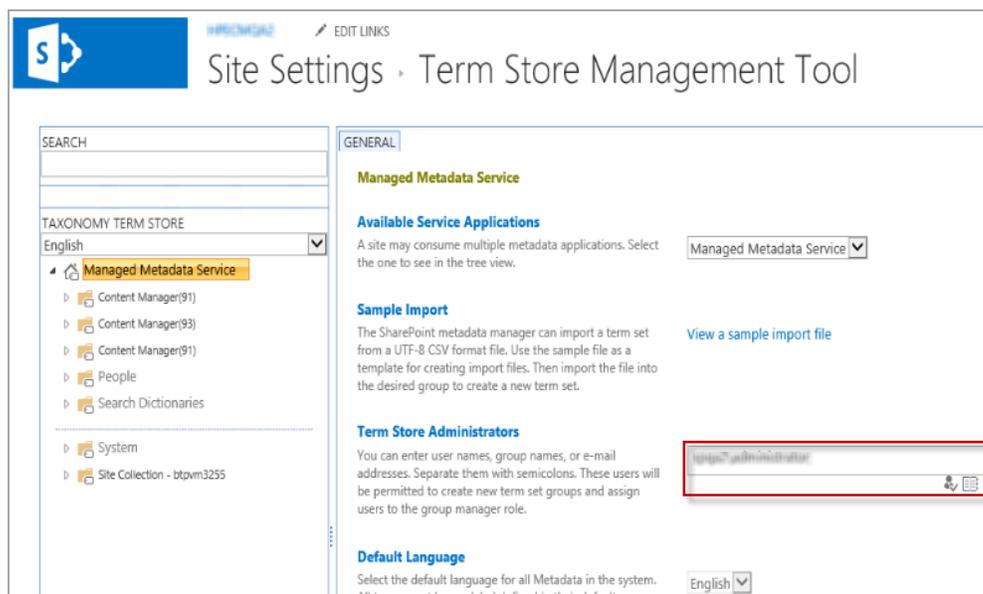

3. Creating a term store group

NOTE: This process is same for both SharePoint Online and on premise.

- a. In the left-hand navigation pane, click **Managed Metadata Service** root drop-down menu and choose **New Group**.

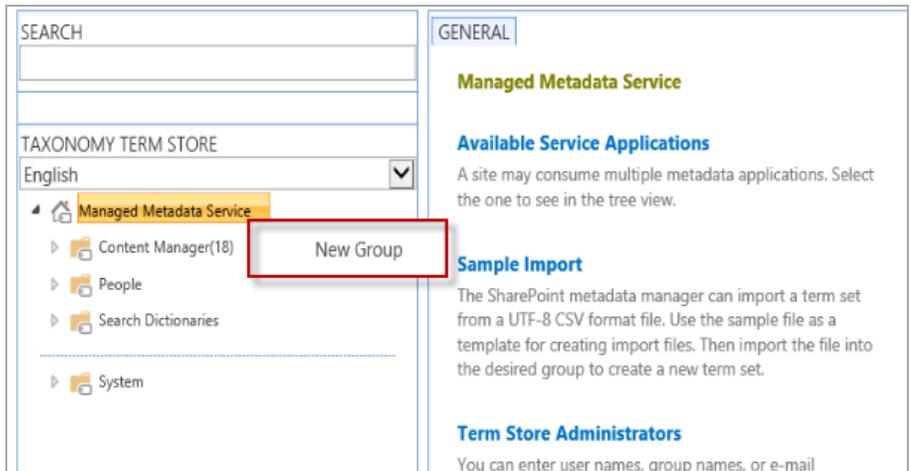

- b. Type the group name in and press return. The name that you give to your group is very important. It must be in the format:

Content Manager(database ID)


Replace the term “database ID” with the 2 character identifier of your Content Manager dataset. For example, if your dataset ID was “45” then the name of your group would be:

Content Manager(45)

NOTE: There is no space between “Manager” and the opening bracket.

In the example below I have created a Content Manager group with a database ID of ‘XX’. Once the group has been created, the management page for the group is displayed.

NOTE: Editing (adding/deleting/changing) the termsets/terms in Content Manager Term Store group is not allowed.

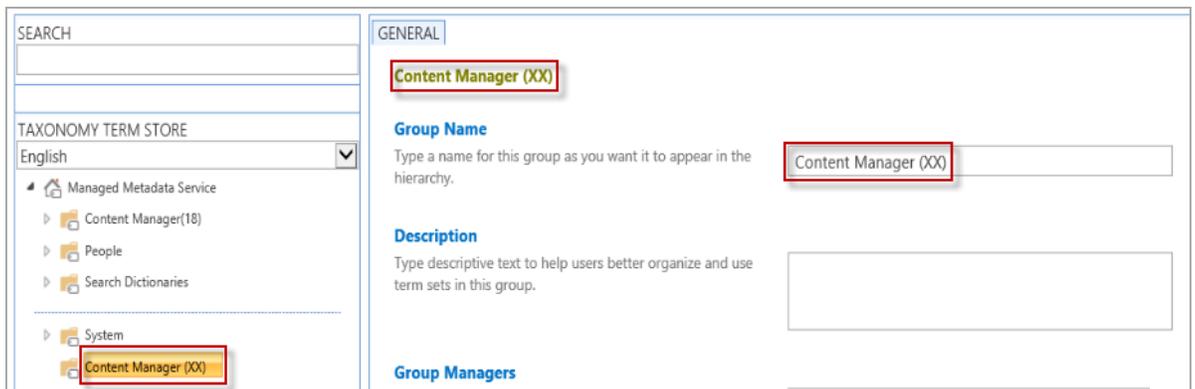

NOTE: If you are using custom fields created using external termstore, the following are the constraints:

- when you modify the values in Content Manager, make sure to use semicolon (;) as the delimiter. Anything other than semicolon (;) is not supported.

You will find an entry with an **invalid value** in the logs.

- when you modify the values in Content Manager and you enter a value which is not present in the termset, the values are not reflected in the Sharepoint.

A failure message stating that the value is not available in the termset is logged.

4. Granting permissions to a term store group


- a. In the left-hand navigation pane, select the appropriate Content Manager group, with the correct database ID. In this example I'm working with a term store group with a database ID of 'XX'.
- b. Add user(s) to the **Contributors** section, click on the validate icon (Person with a tick) or use the people picker to select the user(s), and then click **Save**.
- c. Verify that user (s) is saved into the **Contributors** section. Sometimes, the first attempt to save the value doesn't work, and you need to repeat it a second time.

D: Troubleshooting

General Troubleshooting

Scenario 1: Error while adding the app to a site

When adding the app to a site, you may see the following:

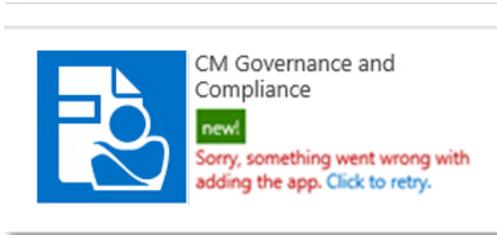

This can occasionally occur when this is the first instance of the app being added to the SharePoint farm. Usually a second attempt (using the “Click to retry” link) will resolve this issue.

However, in rare cases, it has been found that an authentication setting for the server has been installed incorrectly. In this scenario, looking at the details of the app will provide further information regarding the installation error.




The error displayed may be similar to the following:

The remote event receiver callout failed.

Details: The HTTP request is unauthorized with client authentication scheme 'Anonymous'. The authentication header received from the server was ''

If a second attempt to install still doesn't succeed, and/or you are receiving a similar error to above, follow these steps.

1. Open **IIS Manager** and expand the site: **Content Manager SharePoint Server**.
2. Select **EventReceivers**, in the right-hand pane, using the **Features view**, locate and double-click the **Authentication** icon.

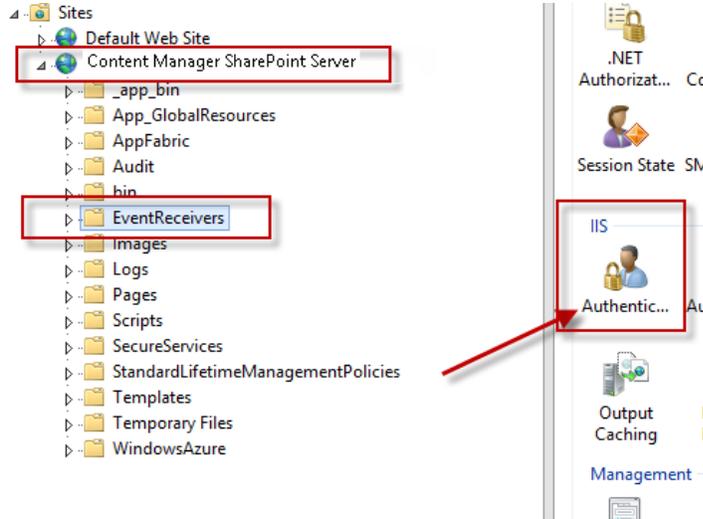

3. If **Anonymous Authentication** is **Disabled**, right click and select **Enable** to enable it. The authentication should now be set as follows:

Authentication		
Name	Status	Response Type
Anonymous Authentication	Enabled	
ASP.NET Impersonation	Disabled	
Basic Authentication	Disabled	HTTP 401 Challenge
Digest Authentication	Disabled	HTTP 401 Challenge
Forms Authentication	Disabled	HTTP 302 Login/Redirect
Windows Authentication	Disabled	HTTP 401 Challenge

4. Confirm that you can browse to the URL:
https://YourUrl/EventReceivers/AppEventReceiver.svc.

You should now be able to add the app to the site.

Scenario 2: Viewing the log file

There are two log files containing information, which may help with fault finding an installation. Log files can be found in the "Logs" sub directory of the installation directory. By default, this will be:

C:\Program Files\Micro Focus\Content Manager\Content Manager SharePoint Integration\Logs

The log named "*Configuration Tool.log*" contains logging information created by the configuration tool.

The log named “*SharePointIntegration.log*” contains logging information created by the rest of the application.

Scenario 3: Turning on additional information

When exceptions occur, in some cases, there is additional information that can be provided to the user. This is turned off by default as it may contain information that could be used by malicious users. It is possible to turn this on if required.

1. Navigate to the installation directory and locate the “bin” subdirectory. Double click the file named:

EntLibConfig.exe


2. This opens the **Microsoft Enterprise Library Configuration Console**.

3. From the “File” menu choose “Open” then navigate to the installation directory and find the file named:


EnterpriseLibrary.config

4. Select and open that file.

5. Expand the “Exception Handling Settings” section:

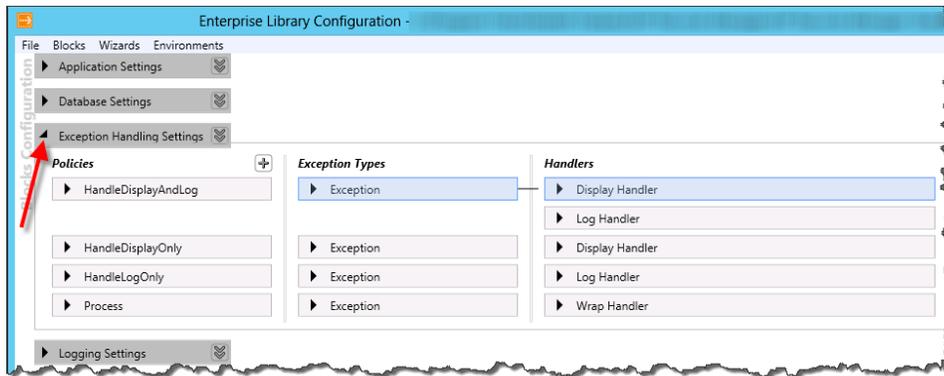

6. For the “HandleDisplayAndLog” handler, expand the “Display Handler” and locate the attribute “ShowAdditionalInformation”. Set this value to “true”.

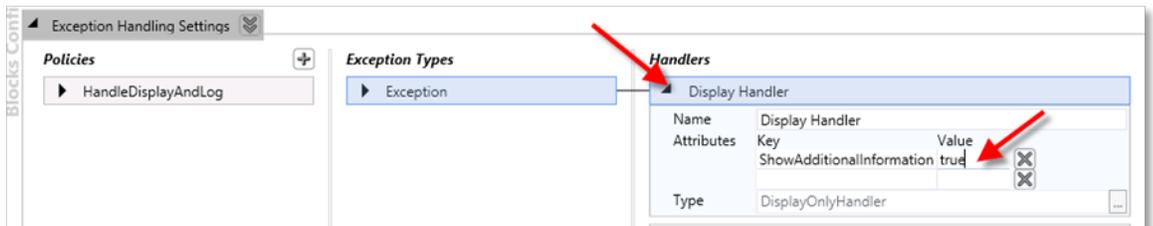

7. Repeat these steps for the “HandleDisplayOnly” block.



8. Once complete, choose “File” then “Save”.

NOTE: You must complete these steps on all servers in the Content Manager farm.

Scenario 4: Turning on success logging

During fault finding, you may be asked to turn on success logging. This enables verbose logging that will allow the support team to better diagnose where issues may be occurring.

Success logging has a performance impact. Do not enable it unless absolutely necessary and disable it once fault finding is complete.

1. Navigate to the installation directory and locate the “bin” subdirectory. Double click the file named:

EntLibConfig.exe


2. This opens the Microsoft Enterprise Library Configuration Console.

3. From the “File” menu choose “Open” then navigate to the installation directory and find the file named:


EnterpriseLibrary.config

4. Select and open that file.


5. Expand the “Logging Settings” section followed by the “Success” block:

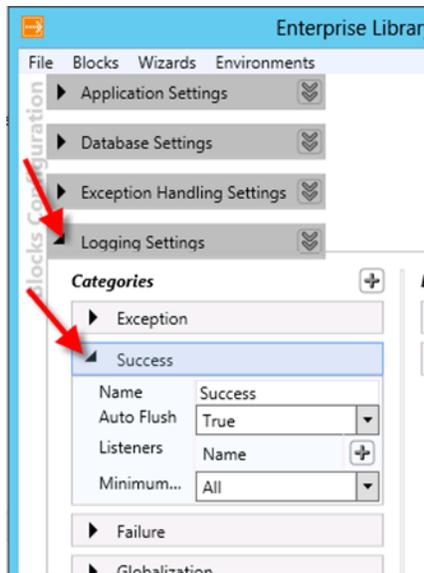

6. Click the “+” button next to the “Listeners” row:

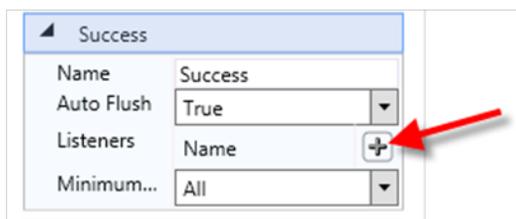

7. From the drop down that is added, choose the "Content Manager SharePoint Integration Trace Listener".

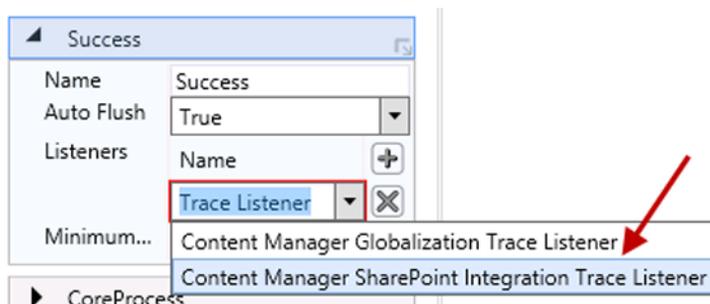

8. Once complete, choose "File" then "Save".

NOTE: You must complete these steps on all servers in the Content Managerfarm.

Other logging categories

In 9.1 the following categories were introduced to reduce the amount of verbose logging:

- CoreProcess
- Search
- Security
- ManagementRules
- App
- RemoteEvents
- LifetimeManagement
- Jobs
- Webhooks

Turning on the "Search" category will only log messages related to search. This is to make the fault finding process a lot easier. See [Turning on success logging](#).

These logging has a performance impact. Do not enable it unless absolutely necessary and disable it once the fault finding is complete.

Scenario 5: Job process fails to start


If the Content Manager SharePoint Service fails to start, any jobs added to the queue will stay in a pending state, and will not get processed. This is typically because the account details (username and password) were entered incorrectly during installation.

To rectify this, perform the following:

1. Go to Windows Services on the Content Manager Workgroup Server, where you installed the SharePoint integration MSI.
2. Locate the Content Manager SharePoint Service in the list.
3. Double-click the service name to open up the properties dialog, and go to the **Log on** tab.
4. Browse for the appropriate domain service account, to ensure you are using a valid account in the directory.
5. Re-enter the password, and confirm it, then click **Apply**.
6. Go back to the **General** tab, make sure the **Startup** type is **Automatic**, and click on **Start**.
7. If the account details are valid, the service should start, click **OK** to close the dialog.

Scenario 6: Cannot open the configuration tool due to error

When launching the integration configuration tool to change existing settings, you see the following error:

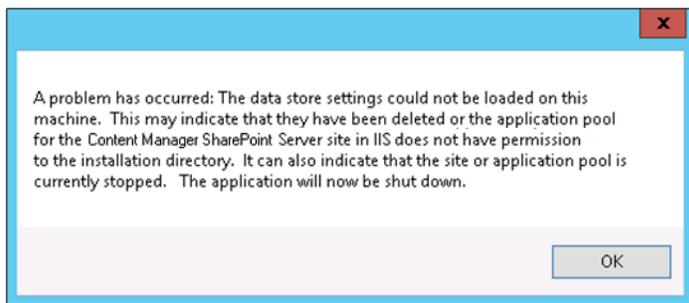

Make sure that you are launching the configuration tool using 'Run as Administrator'. If this doesn't resolve the problem, then continue with fault finding.

The error message does describe some potential causes, and these should be checked, but the most likely issue is that the configuration database is not accessible for some reason. Check to make sure that the SQL Server where the configuration database is hosted is available, and that the configuration database is still listed as an active DB in SQL Server Management Studio.

If for some reason, the database is no longer available, restore from backup and retry the configuration tool.

In the worst case scenario, if the database is irretrievable, use the [Configuration Tool](#) to delete the connection string stored for the existing database and creating a new database.

Scenario 7: HTTP Error 503 - the service is unavailable

If when navigating to Content Manager Governance and Compliance app pages, you see the following page:



This means that the application pool for the **Content Manager SharePoint Server** website has failed to start, most likely due to incorrect account credentials. To rectify this:

1. Open **IIS Manager**, and in the **Connections** pane, click on **Application Pools**. The main window will display a list of all application pools.
2. Locate the **Content Manager SharePoint Server** application pool in the list.
3. Right-click on the entry and choose **Advanced Settings**.
4. In the **Advanced Settings** dialog, locate the **Identity** row, select it, and then click on the **Browse** button that appears alongside the account name.
5. In the **Application Pool Identity** dialog, click on **Set**.
6. In the **Set Credentials** dialog, re-enter the correct account credentials, with username in the format domain\username. Click **OK**.
7. Click **OK** to close the **Application Pool Identity** dialog, and then **OK** to close the **Advanced Settings dialog**.
8. the **Content Manager SharePoint Server** application pool in the list, and choose **Start**.
9. If the account credentials are now valid, the status of the application pool will change to **Started**.

Scenario 8: Configuration tool takes a long time to load

If the configuration tool takes a long while to start up, this is an indication that caching is incorrectly configured, or not working. To resolve this:

For on premise environments

Refer to the *Configuring AppFabric* and *Troubleshooting AppFabric* appendices. Ensure AppFabric is correctly installed and that the cache cluster is running before restarting the configuration tool.

For Windows Azure environments

If using Windows Azure, it is likely that the caching options have not been set in the tool. See [General Administration Tasks - Azure Cache](#) for more details.

Scenario 9: Failed to create client context error on pages

If when visiting Content Manager Governance and Compliance app pages, you see a **Sorry, something went wrong** error:

Message: Failed to create client context for site, http://spi10-spwfem2/sites/Content Manager. This means that the current user does not have the permission on this site or the app configuration settings are invalid.

IntegrationException - Error Number:C1904, Additional Information:, Message:Failed to create client

This is because, in some scenarios, during installation, the Content Manager SharePoint Server inadvertently uses anonymous access in IIS. To resolve the issue:

1. Open IIS Manager and select the site: **Content Manager SharePoint Server**.
2. In the right-hand pane using the “Features view” locate and double click the **Authentication** icon.
3. Authentication will initially show **Anonymous Authentication** as **Enabled** and **Windows Authentication** as **Disabled**.
4. Right-click on **Windows Authentication** and choose **Enable**.
5. Right-click on **Anonymous Authentication** and choose **Disable**.
6. Test the app pages again, they should load without any errors.

Troubleshooting Workgroup servers

Scenario 1: Error - Unable to add server – https issue

1. If you have configured the Content Manager farm for SharePoint Online or you are using HTTPS there is a known issue that prevents adding a workgroup server to the list. The symptoms are:
 - When you try to add a server to the server list, a validation error states “A valid server cannot be reached on this URL”.
 - If you browse to the URL *https://YourUrl/SecureServices/DataStoreService.svc* you receive an authentication prompt. Regardless of entering the correct credentials, you are not permitted to view the page.
 - If you have configured HTTPS to be used, you have [tested that this is working correctly](#).

If you encounter this issue, this will also prevent the publishing of configuration data. It is likely that you will need to utilize the following workaround on the machine that you are running the configuration tool (and only on that machine):

- Open **IIS Manager** and select the site: **Content Manager SharePoint Server**.
- Expand the site and select **SecureServices**.
- In the right hand pane using the “Features view” locate and double click the **Authentication** icon.
- Authentication will initially show **Anonymous Authentication** as **Disabled** and **Windows Authentication** as **Enabled**.
- Right click on **Anonymous Authentication** and select **Enable**.

- Right click **Windows Authentication** and select **Disable**.

Name	Status	Response Type
Anonymous Authentication	Enabled	
ASP.NET Impersonation	Disabled	
Basic Authentication	Disabled	HTTP 401 Challenge
Digest Authentication	Disabled	HTTP 401 Challenge
Forms Authentication	Disabled	HTTP 302 Login/Redirect
Windows Authentication	Disabled	HTTP 401 Challenge

2. You will also need to temporarily update the web.config file for the site.

- Navigate to the installation directory and open the file called “web.config” (notepad is a suitable program for opening this file).

- Locate all the following nodes:

```
<transport clientCredentialType="Windows"/>
```

- Modify this node to read:

```
<transport clientCredentialType="None"/>
```

- Save the web.config file.

Confirm that you can browse to the URL *https://YourUrl/SecureServices/DataStoreService.svc*.

You should now be able to add your workgroup servers to the list.

Once you have finished [publishing](#), you must change the authentication back to:

Name	Status	Response Type
Anonymous Authentication	Disabled	
ASP.NET Impersonation	Disabled	
Basic Authentication	Disabled	HTTP 401 Challenge
Digest Authentication	Disabled	HTTP 401 Challenge
Forms Authentication	Disabled	HTTP 302 Login/Redirect
Windows Authentication	Enabled	HTTP 401 Challenge

You must revert the web.config node that was modified back to read:

```
<transport clientCredentialType="Windows"/>
```

Scenario 2: Error - Unable to add server – code access security issue

If you have configured code access security at machine level, there is a known issue that prevents adding a workgroup server to the list. The symptoms are:

- When you try to add a server to the server list, a validation error states “A valid server cannot be reached on this URL”
- If you browse to the URL *https://YourUrl/SecureServices/DataStoreService.svc* you receive an error. If you turn off custom errors in the web.config file, the error mentions code access security.

If you encounter this issue, this will also prevent the publishing of configuration data and use of the Content Manager Governance and Compliance app. You will need to make the following changes on all machines in your Content Manager farm.

1. Navigate to the installation directory and open the file called “web.config” (notepad is a suitable program for opening this file).

2. Locate all the following node:

```
<system.web>
```

3. Insert the following node before the closing tag:

```
<trust level="Full"/>
```

The full node should look similar to this when complete:

```
<system.web>
  <customErrors mode="On"/>
  <compilation debug="false" targetFramework="4.5" />
  <httpRuntime requestValidationMode="4.5" executionTimeout="60" />
  <pages controlRenderingCompatibilityVersion="3.5" clientIDMode="AutoID" />
  <identity impersonate="false" />
    <trust level="Full"/>
</system.web>
```

4. Save the web.config file.

Confirm that you can browse to the URL *https://YourUrl/SecureServices/DataStoreService.svc*.

You should now be able to add your workgroup servers to the list.

NOTE: That there are security considerations with setting the trust level to full. It is not recommended that this approach be taken if your server is internet facing. You should consider modifying the CAS policies instead.

Troubleshooting App Catalog

This section describes some of the issues we have encountered whilst testing and developing the app. These articles are aimed at SharePoint Farm Administrators, **and include steps that can have a serious impact on the SharePoint Farm if not carried out correctly**. These are suggestions and observations only, and not stipulations on how to configure SharePoint for apps.

Scenario 1: Apps are turned off error

If you receive the following error when trying to add the app to a site, it may be because the Subscription Settings Service Application is not configured:

"Sorry, apps are turned off. If you know who runs the server, tell them to enable apps."

First check in Central Administration to see if there is a provisioned Subscription Settings service application. If not, you can use the example PowerShell script in the *Creating a Subscription Settings Service Application* appendix below, or you can choose to create one manually.


Once successfully completed, you need to configure app URLs, see the *Configuring app URLs – On Premise only* section above for details.

Once configured, perform an **iisreset** from an elevated command prompt, if still getting the same error, a server restart will be required.

Scenario 2: Can't add this app error

When trying to add the app to a site, you get the following error: You can't add this app here.

And when you click on the **App details** link, you see the following message:

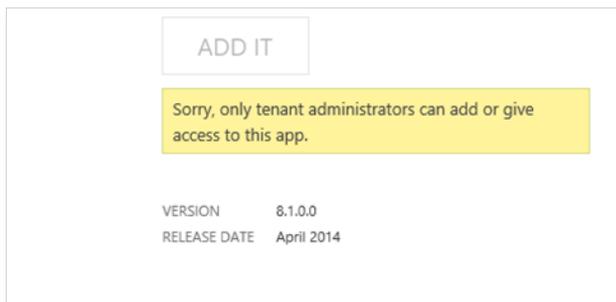


The following errors occurs when the **User Profile Synchronization** service has not started on the SharePoint Server.

As a farm administrator, go to **SharePoint Central Administration > Application Management > Manage services on server** and check that the service is in a **Started** state.

If the service is **Stopped**, and will not start, it will require additional troubleshooting that is outside the scope of this document. Consult Microsoft technical documentation for help with troubleshooting this service.

Scenario 3: Site hasn't been shared with you error


The following error is a known issue with on premise installations that occurs when you add an app to a site other than the first site:

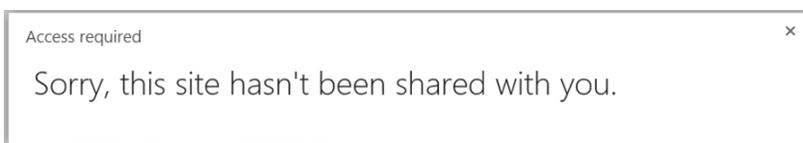

The solution to this is to add the user attempting to add the app, to the local machine administrators group on all SharePoint machines on the SharePoint farm.

On Sharepoint system, in the Server manager, go to **Tools > Computer management > Local users and groups > Groups**. Add all the three user types to administrator - SPAdmin1,

AppPoolUser1, JobService1. Double click **Administrator**, click **Add** and type in the user name and then click **Add** again.

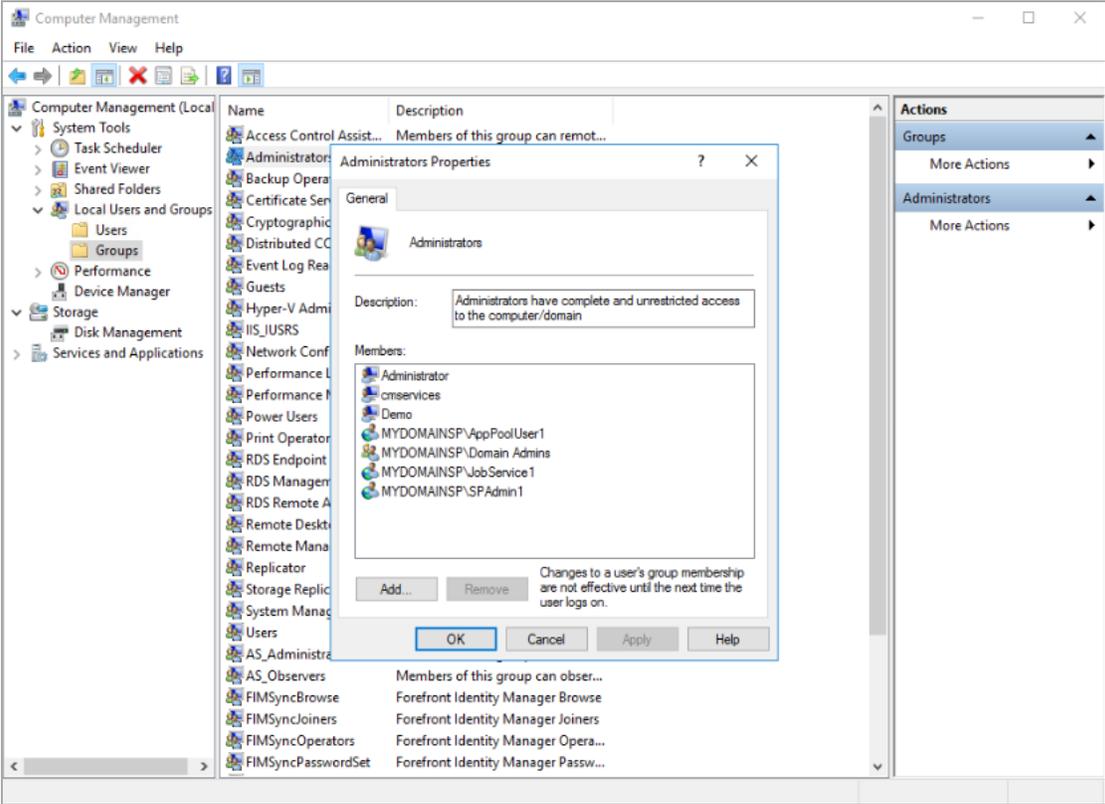

NOTE: This appears to be a SharePoint issue however we are continuing to find a better solution to this issue.

E: Example PowerShell Scripts

These example scripts are provided to help with troubleshooting, and in some cases to aid in bulk actions.

OpenText takes no responsibility for the use of these scripts. They are intended to be used by administrators with sufficient PowerShell knowledge, in order to customise and tweak these scripts in accordance with local systems and policies. If you are unsure, test the script in a non-production environment. If you are still unsure, DO NOT USE them.

SharePoint

App Management

Remove Content Manager app from all sites and site collections in a web application

```
## Remove-App.ps1
## Remove (uninstall) all app instances for a product id on an particular web
## application
##
## Usage:
##
## ## Remove an App by uninstalling all the instances of an App
## Remove-App -productId <ProductId> -webAppUrl <webAppUrl>
##

param(
    [Parameter(Mandatory=$true)] [String] $webAppUrl
)

Remove-PSSnapin Microsoft.SharePoint.PowerShell -erroraction SilentlyContinue
Add-PSSnapin Microsoft.SharePoint.PowerShell -erroraction SilentlyContinue

# Set excluded paths as comma-delimited strings, replace these examples
[array]$excludedPaths = "http://spdev12013/sites/inplacerm/not",
    "http://spdev12013/sites/my/nothing"

# Set Content Manager App ProductID
$productID = "C493061F-E2BB-4516-8537-45C4FB005D83";

function RemoveInstances($productId = $null, $webAppUrl = $null)
{
    $outAppName = "";
    $sites = Get-SPSite -WebApplication $webAppUrl
    $outWebs = @()
    foreach($site in $sites){
        if($site.AdministrationSiteType -ne "None"){
            continue;
        }
        $webs = Get-SPWeb -site $site
        foreach($web in $webs) {
            $appinstances = Get-SPAppInstance -Web $web
            foreach($instance in $appinstances) {
```

```

        # Check if there are sites where the property should not be changed
        if ($excludedPaths -notcontains $_.Url) {
            if($productId -eq $instance.App.ProductId) {
                if ($outAppName -eq "") {
                    $outAppName = $instance.Title;
                }
                $outWebs += $web;
                Write-Host "Uninstalling from" $web.Url;
                Uninstall-SPAppInstance -Identity $instance -confirm:$false
            }
        }
    }
}
}
}
return ($outAppName,$outWebs)
}

$confirm = Read-Host "This will uninstall all instances of the App and is
irreversible. Proceed? (y/n)"
if($confirm -ne "y"){
    Exit
}

$global:appName = $null;
$global:webs = $null;

[Microsoft.SharePoint.SPSecurity]::RunWithElevatedPrivileges(
{
    $returnvalue = RemoveInstances -productId $productId -webAppUrl $webAppUrl;
    $global:appName = $returnvalue[0];
    $global:webs = $returnvalue[1];
}
);

$count = $global:webs.Count;
if($count -gt 0){
    Write-Host "All the instances of the following App have been uninstalled:";
    Write-Host "App Name:" $global:appName;
    Write-Host "Product Id: $productId";
    Write-Host "Number of instances: $count";
    Write-Host "";
    Write-Host "Urls:";

    foreach($web in $global:webs) {
        Write-Host $web.Url;
    }
}
else {
    Write-Host "No instances of the App with Product Id $productId found.";
}
return;

```

Windows Azure

Create an Windows Azure Managed Cache

```
New-AzureManagedCache -Name hprm -Location "East Asia" -Sku Basic -Memory 128MB  
Get-AzureManagedCache
```

F: Custom Claims Implementation

NOTE: The information contained within this appendix is worded using Engineering terms and concepts, please be aware that this appendix is intended for an audience which requires a software development background.

In order to leverage the new custom claims feature within the application, you will need to ensure that you have set up the claim rules on your AD server. For more information on how to set up your AD, see [Additional configuration to support ADFS](#).

As a starting point, the application comes with a sample custom claim to allow you to see how the features work using custom claims from an LDAP setup. In your installation directory, you can see two new files:

- SampleClaimDescriptionMapping.xml
- ClaimDescriptionProviders.xml

Located on the MSI is a C# project which will allow you to write a custom claims implementation of your own.

The ClaimDescriptionProviders file is provided to allow administrators the ability to define their own endpoints to use as custom claim providers.

Below is the XML content of that file, showing that **for each** custom provider an associated tag must be placed within the "Providers" element ensuring that the following attributed are also supplied:

Assembly	The fully qualified name of the dynamic link library (.dll) file which provides the functionality for the custom claim.
Class	The fully qualified name-space which is used as the entry point to the aforementioned assembly.

```
<?xml version="1.0" encoding="utf-8" ?>
<Providers>
  <Provider Assembly="HPE.Integration.SharePoint.Claims.Provider"
Class="HPE.Integration.SharePoint.Claims.Provider.SampleProvider"></Provider>
</Providers>
```

In order to leverage the custom claims functionality, you also need to provide a mapping which defines what your custom claim is using as the authentication component.

```
<?xml version="1.0" encoding="utf-8" ?>
<ClaimDescriptions>
  <!-- This sample provider assumes you have created a custom ADFS claim
description and mapped that to the department user property -->
  <ClaimDescription Name="Department" ActiveDirectoryAttribute="Department" />
</ClaimDescriptions>
```

The SampleClaimDescriptionMapping file clearly shows how to create such an entry. As in the previous file, each custom claim requires its own "ClaimDescription" XML tag with the following attributes present:

Name	A plain text attribute which will be used on the user interface.
ActiveDirectoryAttribute	The name of the variable which will be used as the claim.

NOTE: This is an example only. You will need to ensure that the custom code you use to


G: Upgrading the Content Manager 8.3 Farm database

When upgrading from 8.3, the Records Manager Farm database needs to be upgraded using the **HPE.Integration.SharePoint.8xVersionUpgradeTool.exe** tool.


To perform this upgrade follow the below steps:

- 1. Upgrade the SharePoint Integration using the **CM_SharePointIntegration_x64.msi**.
- 2. Navigate to the **installation directory > Bin** and run the tool as Administrator:


HPE.Integration.SharePoint.8xVersionUpgradeTool.exe

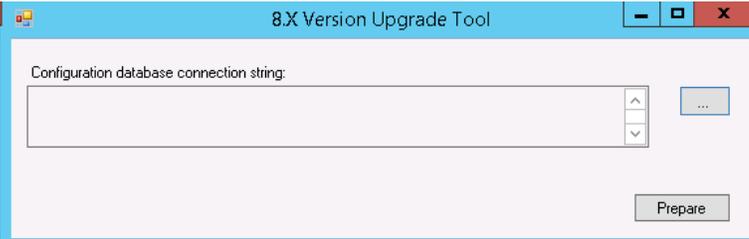


- 3. Click the quick select:

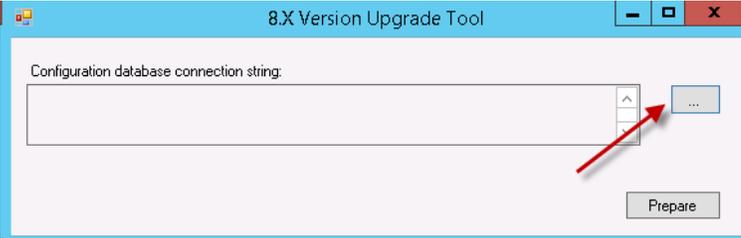


- 4. Populate the database:

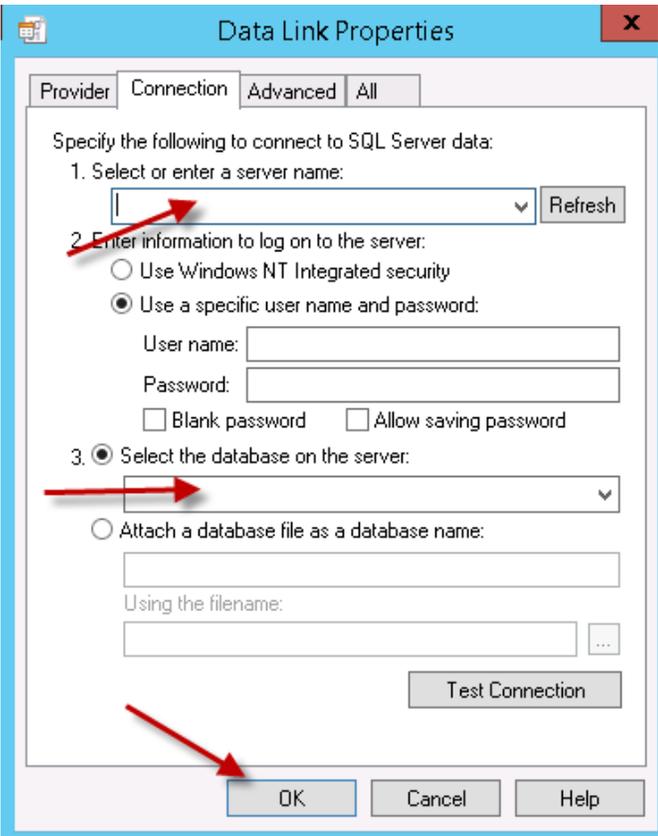

5. Select Prepare:

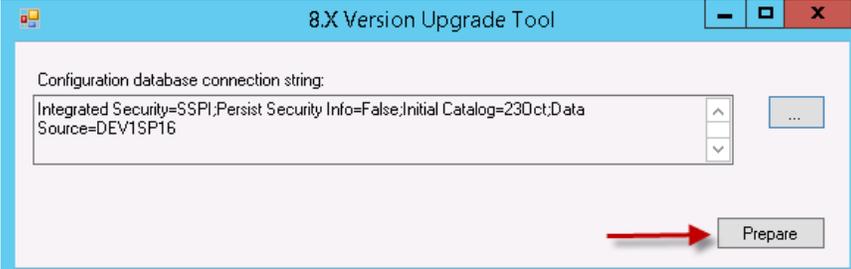

6. Once the Version upgrade tool completes the below message will display:

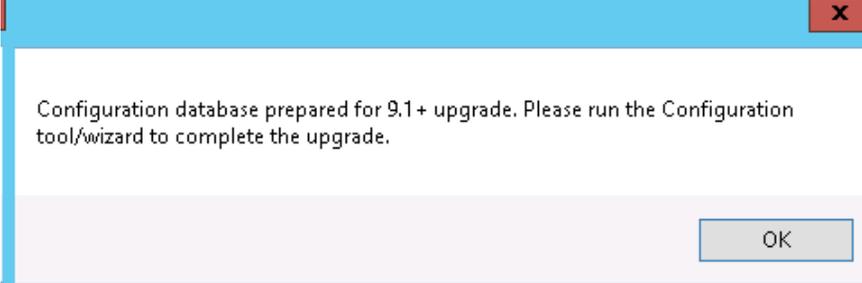

After the Version upgrade tool has completed the Configuration Tool need to be configured. To do this:

1. Populate the 'Content Manager Farm database connection string'.
2. Before publishing the configuration navigate to **Tenants > tenant > configure > Permissions** Tab and populate the Primary Configuration Administrator.
3. Continue with [Upgrading the SharePoint App](#).