



# Orbix<sup>®</sup> Mainframe

---

## Management User's Guide

Version 6.3, July 2009

© 2009 Progress Software Corporation and/or its affiliates or subsidiaries. All rights reserved.

These materials and all Progress® software products are copyrighted and all rights are reserved by Progress Software Corporation and/or its affiliates or subsidiaries. The information in these materials is subject to change without notice, and Progress Software Corporation and/or its affiliates or subsidiaries assume no responsibility for any errors that may appear therein. The references in these materials to specific platforms supported are subject to change.

---

Actional, Actional (and design), Allegrix, Allegrix (and design), Apama, Apama (and Design), Artix, Business Empowerment, DataDirect (and design), DataDirect Connect, DataDirect Connect64, DataDirect Technologies, DataDirect XML Converters, DataDirect XQuery, DataXtend, Dynamic Routing Architecture, EdgeXtend, Empowerment Center, Fathom, IntelliStream, IONA, IONA (and design), Mindreef, Neon, Neon New Era of Networks, ObjectStore, OpenEdge, Orbix, PeerDirect, Persistence, POSSENET, Powered by Progress, PowerTier, Progress, Progress DataXtend, Progress Dynamics, Progress Business Empowerment, Progress Empowerment Center, Progress Empowerment Program, Progress OpenEdge, Progress Profiles, Progress Results, Progress Software Developers Network, Progress Sonic, ProVision, PS Select, SequeLink, Shadow, SOAPscope, SOAPStation, Sonic, Sonic ESB, SonicMQ, Sonic Orchestration Server, Sonic Software (and design), SonicSynergy, SpeedScript, Stylus Studio, Technical Empowerment, WebSpeed, Xcalia (and design), and Your Software, Our Technology-Experience the Connection are registered trademarks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and/or other countries. AccelEvent, Apama Dashboard Studio, Apama Event Manager, Apama Event Modeler, Apama Event Store, Apama Risk Firewall, AppsAlive, AppServer, ASPen, ASP-in-a-Box, BusinessEdge, Cache-Forward, DataDirect Spy, DataDirect SupportLink, FUSE, FUSE Mediation Router, FUSE Message Broker, FUSE Services Framework, Future Proof, GVAC, High Performance Integration, ObjectStore Inspector, ObjectStore Performance Expert, OpenAccess, Orbacus, Pantero, POSSE, ProDataSet, Progress ESP Event Manager, Progress ESP Event Modeler, Progress Event Engine, Progress RFID, PSE Pro, SectorAlliance, SeeThinkAct, Shadow z/Services, Shadow z/Direct, Shadow z/Events, Shadow z/Presentation, Shadow Studio, SmartBrowser, SmartComponent, SmartDataBrowser, SmartDataObjects, SmartDataView, SmartDialog, SmartFolder, SmartFrame, SmartObjects, SmartPanel, SmartQuery, SmartViewer, SmartWindow, Sonic Business Integration Suite, Sonic Process Manager, Sonic Collaboration Server, Sonic Continuous Availability Architecture, Sonic Database Service, Sonic Workbench, Sonic XML Server, StormGlass, The Brains Behind BAM, WebClient, Who Makes Progress, and Your World. Your SOA. are trademarks or service marks of Progress Software Corporation or one of its affiliates or subsidiaries in the U.S. and other countries. Java and all Java-based marks are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. Any other trademarks contained herein are the property of their respective owners.

### Third Party Acknowledgments:

1. The Product incorporates IBM-ICU 2.6 (LIC-255) technology from IBM. Such technology is subject to the following terms and conditions: Copyright (c) 1995-2009 International Business Machines Corporation and others. All rights reserved. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, provided that the above copyright notice(s) and this permission notice appear in all copies of the Software and that both the above copyright notice(s) and this permission notice appear in supporting documentation.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder. All trademarks and registered trademarks mentioned herein are the property of their respective owners.

2. The Product incorporates IDL Compiler Front End Technology from Sun Microsystems, Inc. Such technology is subject to the following terms and conditions: Copyright 1992, 1993, 1994 Sun Microsystems, Inc. Printed in the United States of America. All Rights Reserved. This product is protected by copyright and distributed under the following license restricting its use. The Interface Definition Language Compiler Front End (CFE) is made available for your use provided that you include this license and copyright notice on all media and documentation and the software program in which this product is incorporated in whole or part. You may copy and extend functionality (but may not remove functionality) of the Interface Definition Language CFE without charge, but you are not authorized to license or distribute it to anyone else except as part of a product or program developed by you or with the express written consent of Sun Microsystems, Inc. ("Sun"). The names of Sun Microsystems, Inc. and any of its subsidiaries or affiliates may not be used in advertising or publicity pertaining to distribution of Interface Definition Language CFE as permitted herein. This license is effective until terminated by Sun for failure to comply with this license. Upon termination, you shall destroy or return all code and documentation for the Interface Definition Language CFE. The Interface Definition Language CFE may not be exported outside of the United States without first obtaining the appropriate government approvals.

INTERFACE DEFINITION LANGUAGE CFE IS PROVIDED AS IS WITH NO WARRANTIES OF ANY KIND INCLUDING THE WARRANTIES OF DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, NONINFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE OR TRADE PRACTICE. INTERFACE DEFINITION LANGUAGE CFE IS PROVIDED WITH NO SUPPORT AND WITHOUT ANY OBLIGATION ON THE PART OF SUN OR ANY OF ITS SUBSIDIARIES OR AFFILIATES TO ASSIST IN ITS USE, CORRECTION, MODIFICATION OR ENHANCEMENT. SUN OR ANY OF ITS SUBSIDIARIES OR AFFILIATES SHALL HAVE NO LIABILITY WITH RESPECT TO THE INFRINGEMENT OF COPYRIGHTS, TRADE SECRETS OR ANY PATENTS BY INTERFACE DEFINITION LANGUAGE CFE OR ANY PART THEREOF. IN NO EVENT WILL SUN OR ANY OF ITS SUBSIDIARIES OR AFFILIATES BE LIABLE FOR ANY LOST REVENUE OR PROFITS OR OTHER SPECIAL, INDIRECT AND CONSEQUENTIAL DAMAGES, EVEN IF SUN HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and FAR 52.227-19. Sun, Sun Microsystems and the Sun logo are trademarks or registered trademarks of Sun Microsystems, Inc. SunSoft, Inc. 2550 Garcia Avenue Mountain View, California 94043. NOTE: SunOS, SunSoft, Sun, Solaris, Sun Microsystems or the Sun logo are trademarks or registered trademarks of Sun Microsystems, Inc.

Updated: July 22, 2009

# Contents

|   |           |
|---|-----------|
| <b>List of Figures</b>  | <b>7</b>  |
| <b>Preface</b>  | <b>9</b>  |
| <br>  |           |
| <b>Part 1 Administrator's Guide</b>                           |           |
| <br>  |           |
| <b>Chapter 1 Introduction to IONA Administrator</b>           | <b>15</b> |
| <b>IONA Administrator</b>                                     | <b>16</b> |
| <b>IONA Administrator Components</b>                          | <b>17</b> |
| <b>IONA Administrator Web Console</b>                         | <b>20</b> |
| <b>IONA Administrator Management Service</b>                  | <b>22</b> |
| <b>IONA Configuration Explorer</b>                            | <b>23</b> |
| <b>Orbix Configuration Authority</b>                          | <b>25</b> |
| <b>IONA Administrator Tasks</b>                               | <b>26</b> |
| <br>  |           |
| <b>Chapter 2 Managing Orbix Mainframe Services and Events</b> | <b>29</b> |
| <b>Introduction</b>   | <b>31</b> |
| <b>Orbix Mainframe Instrumentation</b>                        | <b>32</b> |
| <b>Management Configuration</b>                               | <b>33</b> |
| <b>Monitoring Orbix Services on z/OS</b>                      | <b>35</b> |
| <b>Managing Events in the Web Console</b>                     | <b>36</b> |
| Starting the Events Console                                   | 37        |
| Viewing the Events Console                                    | 38        |
| Viewing the Event Log   | 40        |
| <br>  |           |
| <b>Chapter 3 Enterprise Performance Logging</b>               | <b>43</b> |
| <b>Introduction</b>   | <b>44</b> |
| <b>Configuring Performance Logging</b>                        | <b>45</b> |
| <b>Logging Message Formats</b>                                | <b>51</b> |
| <b>Remote Performance Logging</b>                             | <b>55</b> |
| <b>Configuring Remote Performance Logging</b>                 | <b>58</b> |

## Part 2 Programmer's Guide

|   |            |
|---|------------|
| <b>Chapter 4 Introduction to Application Management</b> | <b>65</b>  |
| Introduction to IONA Administrator                      | 66         |
| Introduction to Java Management Extensions              | 68         |
| Introduction to the Orbix Management API                | 71         |
| Overview of Management Programming Tasks                | 73         |
| <b>Chapter 5 Instrumenting CORBA C++ Applications</b>   | <b>77</b>  |
| Step 1—Identifying Tasks to be Managed                  | 78         |
| Step 2—Defining your MBeans                             | 82         |
| Step 3—Implementing your MBeans                         | 88         |
| Step 4—Initializing the Management Plugin               | 102        |
| Step 5—Creating your MBeans                             | 104        |
| Step 6—Connecting MBeans Together                       | 106        |
| <b>Appendix A MBean Document Type Definition</b>        | <b>111</b> |
| The MBean Document Type Definition File                 | 112        |
| <b>Glossary</b>   | <b>115</b> |
| <b>Index</b>  | <b>121</b> |

# List of Figures

|  |     |
|--|-----|
| Figure 1: IONA Administrator   | 18  |
| Figure 2: IONA Administrator Web Console                             | 20  |
| Figure 3: IONA Administrator Web Console Architecture                | 21  |
| Figure 4: IONA Configuration Explorer                                | 23  |
| Figure 5: Orbix Configuration Authority                              | 25  |
| Figure 6: IONA Administrator Integration with z/OS                   | 31  |
| Figure 7: Events Button  | 37  |
| Figure 8: Events Console   | 37  |
| Figure 9: Refresh Button   | 38  |
| Figure 10: Example of an EventLog Panel                              | 40  |
| Figure 11: Setting the Log Filters for the IT_MFA Plug-in            | 41  |
| Figure 12: Example of Logged Event for IMS Adapter in the Log Viewer | 42  |
| Figure 13: Remote Logging Framework                                  | 56  |
| Figure 14: IONA Administrator Components                             | 67  |
| Figure 15: JMX Management and Orbix                                  | 69  |
| Figure 16: Example Parent-Child Relationship                         | 72  |
| Figure 17: Instrumented Plugin in IONA Administrator                 | 79  |
| Figure 18: Instrumented Plugin Application Overview                  | 81  |
| Figure 19: Instrumented Plugin Custom Exception                      | 97  |
| Figure 20: Instrumented Plugin Process MBean                         | 106 |
| Figure 21: Instrumented Plugin Child MBean                           | 109 |

## LIST OF FIGURES

# Preface

Orbix Mainframe provides full integration with the Orbix management infrastructure, which provides support for enterprise-level management across different platform and programming language environments. IONA Administrator is a set of tools, integrated with the Orbix Adaptive Runtime Technology, that enables seamless management of distributed enterprise applications.

---

## Audience

[Part 1](#) is aimed at z/OS systems programmers managing distributed enterprise applications.

[Part 2](#) is aimed at z/OS application programmers writing distributed enterprise applications in C++ who wish to enable their applications for management by IONA Administrator. It assumes a prior knowledge of C++.

---

## Organization of this guide

This guide is divided as follows:

### [Part 1, "Administrator's Guide"](#)

This part is aimed at z/OS systems programmers. First it introduces Orbix enterprise management in general, and the tools used to manage distributed applications. Then it describes how to manage Orbix Mainframe services and monitor events.

### [Part 2, "Programmer's Guide"](#)

This part is aimed at z/OS application programmers writing distributed enterprise applications in C++ who wish to enable their applications for management by IONA Administrator. It explains how to enable CORBA C++ applications for management, and display them in IONA Administrator.

---

## Related documentation

The Orbix Mainframe library includes the following related documentation:

- *CORBA Administrator's Guide*
- *CORBA Configuration Reference*
- *CORBA Programmer's Guide, C++ Edition*

The *Management User's Guide* in the Orbix library can also be referred to for more details.

The latest updates to the Orbix Mainframe documentation can be found at <http://www.iona.com/support/docs/orbix/mainframe/6.3/index.xml>.

---

## Additional resources

The Knowledge Base contains helpful articles, written by experts, about Orbix Mainframe, and other products:

<http://www.iona.com/support/kb/>

If you need help with Orbix Mainframe or any other products, contact technical support:

<http://www.progress.com/support>

---

## Typographical conventions

This guide uses the following typographical conventions:

Constant width

Constant width (courier font) in normal text represents portions of code and literal names of items such as classes, functions, variables, and data structures. For example, text might refer to the `CORBA::Object` class.

Constant width paragraphs represent code examples or information a system displays on the screen. For example:

```
#include <stdio.h>
```

*Italic*

Italic words in normal text represent *emphasis* and *new terms*.

Italic words or characters in code and commands represent variable values you must supply, such as arguments to commands or path names for your particular system. For example:

```
% cd /users/your_name
```

**Note:** Some command examples may use angle brackets to represent variable values you must supply. This is an older convention that is replaced with *italic* words or characters.

**Keying conventions**

This guide may use the following keying conventions:

|           |  |
|-----------|--|
| No prompt | When a command's format is the same for multiple platforms, a prompt is not used.  |
| %         | A percent sign represents the UNIX command shell prompt for a command that does not require root privileges.                           |
| #         | A number sign represents the UNIX command shell prompt for a command that requires root privileges.                                    |
| >         | The notation > represents the DOS, Windows NT, Windows 95, or Windows 98 command prompt.   |
| ...       | Horizontal or vertical ellipses in format and syntax descriptions indicate that material has been eliminated to simplify a discussion. |
| [ ]       | Brackets enclose optional items in format and syntax descriptions.   |
| { }       | Braces enclose a list from which you must choose an item in format and syntax descriptions.  |
|           | A vertical bar separates items in a list of choices enclosed in { } (braces) in format and syntax descriptions.                        |

## PREFACE

# Part 1

## Administrator's Guide

---

### In this part

This part contains the following chapter:

|  |                         |
|--|-------------------------|
| <a href="#">Introduction to IONA Administrator</a>           | <a href="#">page 15</a> |
| <a href="#">Managing Orbix Mainframe Services and Events</a> | <a href="#">page 29</a> |



# Introduction to IONA Administrator

*IONA Administrator is a set of tools that enables you to manage component-based distributed enterprise applications. This chapter introduces IONA Administrator and outlines typical administration tasks.*

---

**In this chapter**

This chapter contains the following sections:

|   |                         |
|---|-------------------------|
| <a href="#">IONA Administrator</a>                    | <a href="#">page 16</a> |
| <a href="#">IONA Administrator Components</a>         | <a href="#">page 17</a> |
| <a href="#">IONA Administrator Web Console</a>        | <a href="#">page 20</a> |
| <a href="#">IONA Administrator Management Service</a> | <a href="#">page 22</a> |
| <a href="#">IONA Configuration Explorer</a>           | <a href="#">page 23</a> |
| <a href="#">Orbix Configuration Authority</a>         | <a href="#">page 25</a> |
| <a href="#">IONA Administrator Tasks</a>              | <a href="#">page 26</a> |

---

# IONA Administrator

---

## Overview

IONA Administrator is a set of tools that enable you to manage and configure component-based distributed enterprise applications. It is integrated with the Orbix *Adaptive Runtime Technology* (ART). This enables IONA Administrator to provide seamless management of IONA products and any applications developed using those products.

IONA Administrator is not aimed solely at any specific technology (for example, CORBA or Web services), but provides a generic management paradigm that enables the application to be managed without the administrator requiring knowledge of the technology used to create that application.

---

## Scope of IONA Administrator

IONA Administrator enables you to manage and configure distributed applications that have been developed using Orbix and Orbix Mainframe. For detailed information about the Orbix product range, see the IONA web site:

<http://www.iona.com/products>

---

## Assumptions

IONA Administrator does not assume that you are familiar Orbix or Orbix Mainframe. What is required is a basic understanding of distributed applications, regardless of whether they are based on CORBA or Web services. In fact, you can use IONA Administrator to manage any C++ system that has been enabled for management.

---

# IONA Administrator Components

---

## Overview

IONA Administrator includes the following main components:

- “IONA Administrator Web Console”.
- “IONA Administrator Management Service”.
- “IONA Configuration Explorer”.
- “Orbix Configuration Authority”.

**Note:** The IONA Configuration Explorer is introduced here for the sake of completeness, but it is not supported with Orbix Mainframe.

---

## IONA Administrator Web Console

The *IONA Administrator Web Console* provides a web browser interface to IONA Administrator. It enables you to manage applications and application events from anywhere, without the need for download or installation. It communicates with the management service using HTTP (Hypertext Transfer Protocol), as illustrated in [Figure 1](#).

---

## IONA Administrator Management Service

The *IONA Administrator Management Service* is the central point of contact for accessing management information in a *domain*. A domain is an abstract group of managed server processes within a physical location. The management service is accessed by both the IONA Administrator Web Console and by the *IONA Configuration Explorer*.


**Note:** Managed applications can be written in C++. The same management service process (`iona_services.management`) can be used by CORBA C++ applications.

---

## IONA Configuration Explorer

The *IONA Configuration Explorer* is a Java graphical user interface (GUI) that enables you to manage your configuration settings. It communicates with your Configuration Repository (CFR) or configuration file using IIOP (Internet Inter-ORB Protocol).

**Note:** The IONA Configuration Explorer is not supported with Orbix Mainframe. You must manually browse your Orbix Mainframe configuration file.

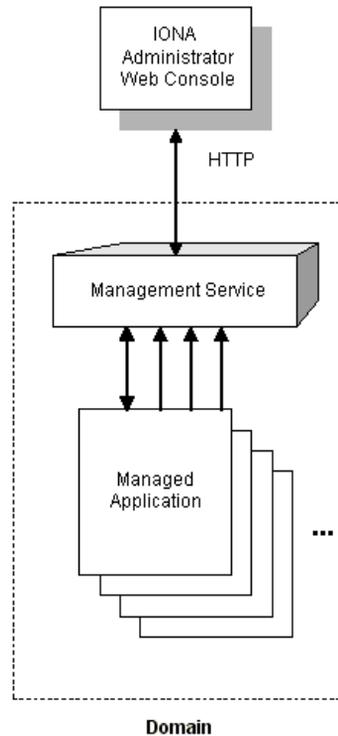

**Figure 1:** *IONA Administrator*

---

**Orbix Configuration Authority**

The *Orbix Configuration Authority* provides a web browser interface to descriptive information about all Orbix configuration settings. You can browse and search for information about Orbix configuration variables in your CFR or configuration file. Additional features

Application programmers can add instructions to their code to monitor specific components in their system. This is known as adding management *instrumentation*.

---

**Adding management instrumentation**

IONA products provide default instrumentation that publishes core information to the management service for any application built using these products.

However, programmers might also wish to add custom instrumentation to an application to suit their needs. IONA Administrator therefore enables full instrumentation of server code. For information on how to write instrumentation code, see [“Programmer’s Guide” on page 63](#).

# IONA Administrator Web Console

## Overview

The IONA Administrator Web Console provides a standard web browser interface to explore and manage distributed applications. The IONA Administrator Web Console uses HTML and JavaScript to create a standard explorer view to represent the data.

Figure 2 shows an example IONA Administrator Web Console interface.

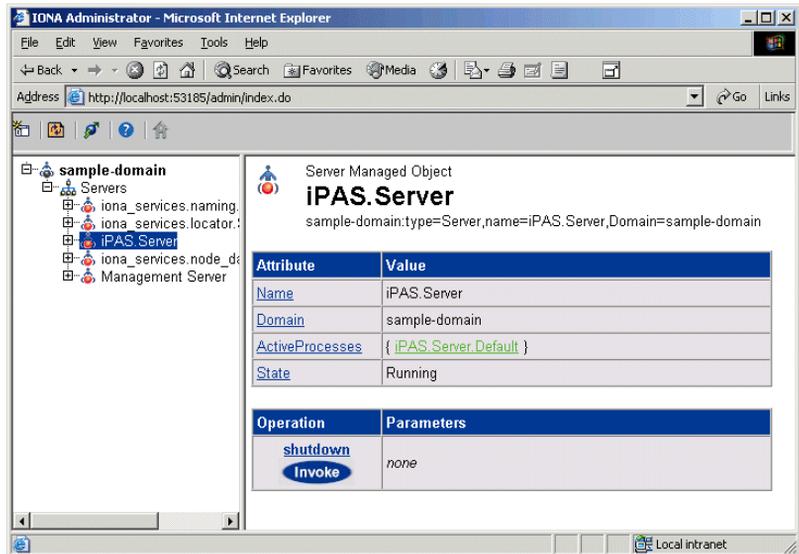


Figure 2: IONA Administrator Web Console

## Multiple applications and domains

You can use one instance of the IONA Administrator Web Console to manage multiple applications in a single domain. You also can use multiple instances of the web console to manage multiple domains from a single machine. This is shown in Figure 3.


### Interaction with the management service

Each IONA Administrator management service makes management data available using a special URL. The management service is the central point of contact for management information in each domain. It publishes information about all managed servers within its domain.

### Web Console architecture

[Figure 3](#) gives an overview of this architecture. Each IONA Administrator Web Console interacts with one management service only. This means that each console can administer the managed servers in one of the two domains only.

Multiple instances of the web console can interact with the same management service through the same HTTP port.

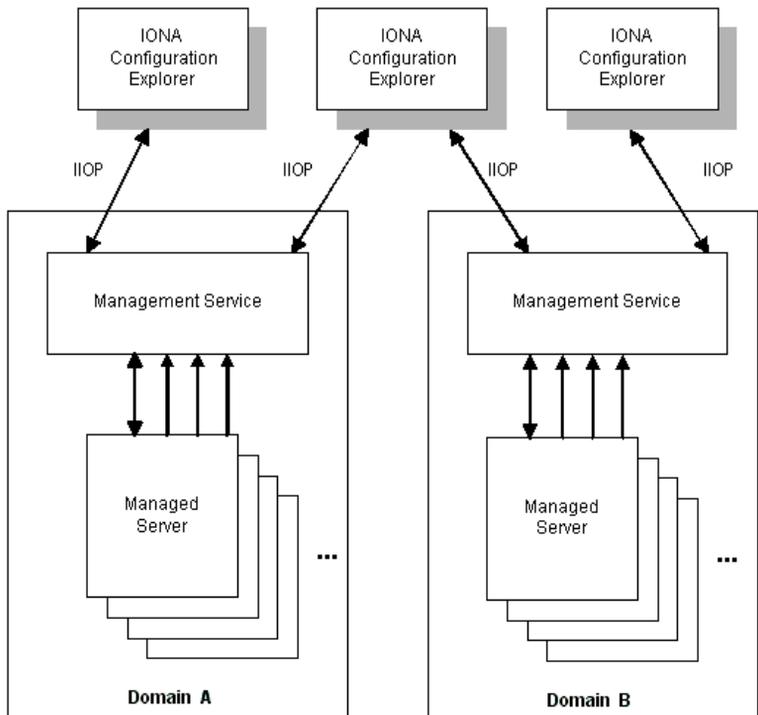

**Figure 3:** IONA Administrator Web Console Architecture

---

# IONA Administrator Management Service

---

## Overview

The IONA Administrator management service is the central point of contact for accessing management information in a domain. The management service acts as a buffer between managed applications and management tools.

---

## Management information

The management service maintains key state information, reducing the need to constantly access the managed applications, and thereby improving performance.

The management service stores and publishes information about all managed servers within its domain. It exposes attributes, operations, and events for all managed servers in a domain. The management service also stores information about user roles and passwords for each user in a domain.

**Note:** Each domain can have only one management service.

---

## Key features

Key features provided by the management service are:

- Centralized repository for all management information.
- Centralized collection of event logging information.
- Persistent storage of event log and agent information.
- Load management gateway plugins (for example, an SNMP plugin).
- Capability to terminate server processes.

For more detailed information, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

# IONA Configuration Explorer

## Overview

The IONA Configuration Explorer is an intuitive Java GUI that enables you to view, modify, and search for configuration settings.

In [Figure 4](#), the **Contents** pane on the left shows the configuration scopes and namespaces displayed for a domain named `my-domain`. The **Details** pane on the right displays the configuration variables and their values. Clicking on a icon on the left displays its associated variables on the right.

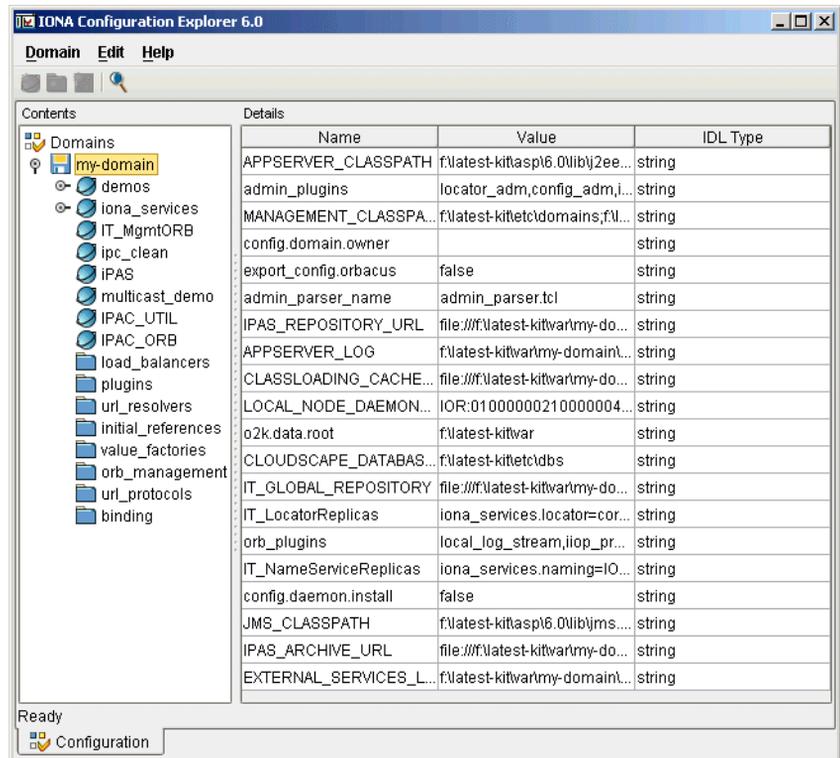


Figure 4: IONA Configuration Explorer

## Multiple Domains

You can use a single instance of the IONA Configuration Explorer to manage configuration of multiple domains, both locally and on remote host machines. The IONA Configuration Explorer communicates with CFRs in any domains that it can contact. It can also read file-based domains where they are locally visible.


**Note:** Because the CFR is not supported with Orbix Mainframe, and the Configuration Explorer is run off-host, there is currently no way for the Configuration Explorer to interact with an Orbix Mainframe configuration domain. Therefore, you must manually browse the configuration file located in `HLQ.DOMAINS` in your Orbix Mainframe installation.

# Orbix Configuration Authority

## Overview

The Orbix Configuration Authority displays text descriptions of all Orbix configuration settings. Its web browser interface enables you to navigate to and search for configuration information, as shown in [Figure 5](#).

The navigation tree, on the left of the screen displays a hierarchical list of configuration namespaces and variables. The details pane, on the right, displays information about the configuration variables associated with the selected node on the tree.

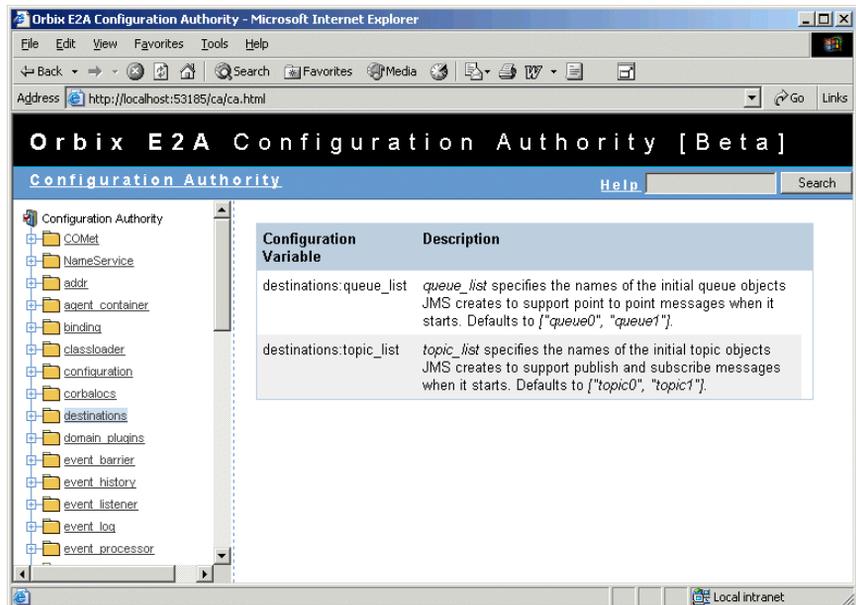

**Figure 5:** *Orbix Configuration Authority*

The **Search** box located at the top left of the screen enables you to search for information about configuration variables containing a specified text string.

For more detailed information, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

# IONA Administrator Tasks

---

## Overview

Typical Orbix management tasks that you can perform with IONA Administrator include:

- “Managing domains”.
- “Managing servers”.
- “Monitoring events”.
- “Managing configuration settings”.
- “Getting started”

This section gives a quick overview of these tasks, and shows where you can find further information in this book.

---

## Managing domains

Typical domain management tasks include:

- Viewing domains.
- Monitoring domain status (whether it is running or stopped).

For more details of how to manage domains, using the IONA Administrator Web Console, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

## Managing servers

Typical server management tasks include:

- Viewing servers.
- Monitoring server status (whether it is running or inactive).
- Controlling servers (shutting down, setting attributes, and invoking operations).

For more details of how to manage servers, using the IONA Administrator Web Console, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

**Monitoring events**

Typical event management tasks include:

- Selecting a domain in which to manage events.
- Viewing full details of an event.
- Setting event viewing options. For example, you can set the number of events viewed, set the kind of events viewed.

For more details of how to manage events, using the IONA Administrator Web Console, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

**Managing configuration settings**

Typical configuration management tasks include:

- Loading up a domain.
- Viewing configuration settings.
- Searching your configuration.
- Finding text descriptions of configuration variables.

For more details of how to find text descriptions of configuration variables using the Orbix Configuration Authority and manage configuration settings for the management service, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

**Getting started**

For details of how to get started with the IONA Administrator Web Console, see the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.



# Managing Orbix Mainframe Services and Events

*Orbix Mainframe provides full integration with the IONA Orbix Management infrastructure. This allows Orbix servers running on the mainframe to be monitored from a centralized location, using IONA Administrator. This chapter provides details on Orbix Mainframe instrumentation and the configuration items involved in managing Orbix Mainframe services. It also explains how to use the IONA Administrator Web Console to monitor events.*

---

**In this chapter**

This chapter discusses the following topics:

|   |                         |
|---|-------------------------|
| <a href="#">Introduction</a>                    | <a href="#">page 31</a> |
| <a href="#">Orbix Mainframe Instrumentation</a> | <a href="#">page 32</a> |
| <a href="#">Management Configuration</a>        | <a href="#">page 33</a> |

|  |                         |
|--|-------------------------|
| <a href="#">Monitoring Orbix Services on z/OS</a>  | <a href="#">page 35</a> |
| <a href="#">Managing Events in the Web Console</a> | <a href="#">page 36</a> |

---

# Introduction

---


## Overview

This section provides an introductory overview of how IONA Administrator components are used in the management of Orbix services running on z/OS.

---

## Graphical overview

[Figure 6](#) provides a graphical overview of how IONA Administrator components such as the Web Console and Management Service are used in the management of Orbix services on z/OS.

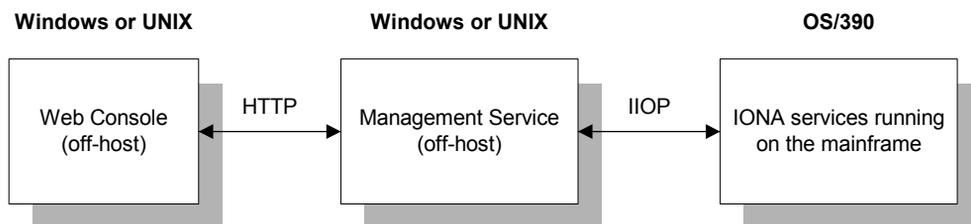

**Figure 6:** *IONA Administrator Integration with z/OS*

As shown in [Figure 6](#), the Web Console and Management Service run off-host and communicate with each other over HTTP. The Management Service and the services running on z/OS communicate with each other over IIOP.

---

## C++ and Java management

Orbix Mainframe fully supports the C++ Management runtime and C++ Management APIs for developing instrumentation capabilities within your Orbix applications. However, Orbix Mainframe does not include the Java Management Service component. Instead, the Java Management Service must be deployed in an off-host Orbix domain, and must be contactable by the Orbix Mainframe environment.

---

# Orbix Mainframe Instrumentation

---

## Overview

This section outlines the components involved in Orbix Mainframe instrumentation. It discusses the following topics:

- [“Instrumentation components”](#).
  - [“Instrumentation demonstration”](#).
- 

## Instrumentation components

Orbix Mainframe instrumentation consists of:

- Default core instrumentation—all Orbix applications can be configured to expose ORB instrumentation statistics.
- Naming Service—the Orbix Naming Service supports instrumentation specific to management of, for example, naming contexts and load balancing.
- C++ custom development—the Orbix C++ Management API allows you to develop customized instrumentation for your own Orbix applications.

For more details on adding management instrumentation to an application, see [“Programmer’s Guide” on page 63](#).

---

## Instrumentation demonstration

An instrumentation demonstration is provided in the UNIX System Services component of your Orbix Mainframe installation, as follows (where *install\_dir* represents the full path to your Orbix Mainframe installation on UNIX System Services):

```
install_dir/asp/Version/demos/corba/pdk/instrumented_plugin
```

This instrumentation demonstration illustrates how to use the main Management APIs and how to write your own Generic Service application. You can use an ORB plug-in approach to build the Management code, to instrument existing services such as the CICS and IMS server adapters.

---

# Management Configuration

---

## Overview

This section provides details of the steps involved in configuring the management of Orbix services on z/OS. It also describes each of the associated configuration items that need to be set on the mainframe host. It discusses the following topics:

- [“Domain interaction”](#)
- [“Configuration steps”](#)

---

## Domain interaction

This section assumes that an off-host Orbix domain is available and has been configured to enable management. It is also assumed that the Orbix Mainframe domain is compatible with this off-host Orbix domain, and that communication between them has already been verified. For example, if the off-host domain has been configured to be fully secure, the Orbix Mainframe domain must be deployed with a TLS domain. Before you attempt to run any managed services on z/OS, you should first confirm that the off-host locator and the other off-host services can be contacted successfully (for example, by using the `itadmin` or `ORXADMIN` tool from z/OS).

---

## Configuration steps

The steps to enable the management of Orbix services on z/OS are:

1. Add the Management Service initial reference configuration settings to the Orbix Mainframe configuration file at the global scope, as follows:

```
initial_references:IT_MgmtService:reference = "IOR:000...";
initial_references:IT_MgmtServiceUser:reference =
  "IOR:000...";
initial_references:IT_MgmtServiceSec:reference = "IOR:000...";
```

The IOR settings can be obtained from the off-host configuration domain.

2. Enable ORB instrumentation by adding the following configuration setting to the configuration scope for the relevant server:

```
plugins:orb:is_managed = "true";
```

3. Ensure that each service has a unique server ID across your entire management domain by adding the following configuration item to the configuration scope for the appropriate server:

```
plugins:it_mgmt:managed_server_id:name = "..."
```

**Note:** By default, the ORB name of the relevant server is used as the ID for a particular service. For example, to specify a unique server name for the locator service, you can choose to set the preceding variable to `"iona_services.locator.mainframe_host"`, where `mainframe_host` is the local TCP/IP hostname.

4. Enable instrumentation of the Naming Service by adding the following configuration settings to the `iona_services.naming` configuration scope:

```
plugins:orb:is_managed = "true";
plugins:naming:is_managed = "true";
plugins:it_mgmt:managed_server_id:name =
  "iona_services.naming.mainframe_bost";
```

5. If you are interested in viewing the event log from the management console, you must configure the managed service to log events to a file. For example:

```
plugins:local_log_stream:filename =
  "/opt/iona/var/logs/imsa.log";
```

---

# Monitoring Orbix Services on z/OS

---

## Overview

This section outlines the steps to monitor Orbix services on z/OS.

---

## Steps

The steps to monitor Orbix services on z/OS are:

- Ensure that the Orbix off-host services are running. This includes the Management Service.
- Start the Orbix Mainframe managed services. On starting, these services attempt to register themselves with the off-host Management Service.

**Note:** If a managed server is unable to contact the off-host Management Service, it starts and continues to run without issuing a warning message. If there is a communication problem, for example, the managed server does not appear in the Management console.

- Start the Web Console. After the various services have been successfully deployed, you can use the Web Console to contact the Management Service, to monitor the state of each of the various services.

**Note:** For more details on using the off-host Web Console and the off-host Management Service refer to the *Management User's Guide* at <http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

# Managing Events in the Web Console

## Overview

This chapter explains how to use the IONA Administrator Web Console to monitor events. It explains how to start its Events Console, and view events for a domain.

The IONA Administrator Web Console's Events Console enables you to view events generated by managed servers. The events console shows an up-to-date list of events in reverse chronological order. You can customize the severity of events and apply filters to selectively view events.

## In this section

This section discusses the following topics:

|   |                         |
|---|-------------------------|
| <a href="#">Starting the Events Console</a> | <a href="#">page 37</a> |
| <a href="#">Viewing the Events Console</a>  | <a href="#">page 38</a> |
| <a href="#">Viewing the Event Log</a>       | <a href="#">page 40</a> |

# Starting the Events Console

## Overview

This subsection explains how to start the IONA Administrator Web Console's Events Console.

## Using the Events Button

To start the Events Console, click the Events button in the IONA Administrator Web Console toolbar, as shown in [Figure 7](#).



**Figure 7:** *Events Button*

If an events console is already open, subsequent clicks on this button bring the web console to the foreground.

## Example Events Console

An example Events Console started from the web console is shown in [Figure 8](#). The events are shown in a list starting with the most recent event at the top.

| Date    | Time     | Severity | Event Source                    | Event Name                               |
|---------|----------|----------|---------------------------------|--|
| 6/1/05  | 12:38 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:38 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:38 PM | Info     | iona_services management server | com.iona.management.ProcessRegistered    |
| 6/1/05  | 12:38 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:37 PM | Info     | iona_services management server | com.iona.management.ProcessUnregistered  |
| 6/1/05  | 12:37 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 6/1/05  | 12:37 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 6/1/05  | 12:37 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 6/1/05  | 12:25 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:25 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:25 PM | Info     | iona_services management server | com.iona.management.ProcessRegistered    |
| 6/1/05  | 12:25 PM | Info     | Management Server               | JMX mbean registered                     |
| 6/1/05  | 12:06 PM | Info     | iona_services management server | com.iona.management.ProcessNotResponding |
| 6/1/05  | 12:06 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 6/1/05  | 12:06 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 6/1/05  | 12:06 PM | Info     | Management Server               | JMX mbean unregistered                   |
| 5/20/05 | 2:38 PM  | Info     | iona_services management server | com.iona.management.ProcessUnregistered  |
| 5/20/05 | 2:38 PM  | Info     | Management Server               | JMX mbean unregistered                   |
| 5/20/05 | 2:38 PM  | Info     | Management Server               | JMX mbean unregistered                   |
| 5/20/05 | 2:38 PM  | Info     | Management Server               | JMX mbean unregistered                   |
| 5/20/05 | 2:35 PM  | Info     | Management Server               | JMX mbean registered                     |
| 5/20/05 | 2:35 PM  | Info     | Management Server               | JMX mbean registered                     |
| 5/20/05 | 2:35 PM  | Info     | iona_services management server | com.iona.management.ProcessRegistered    |
| 5/20/05 | 2:35 PM  | Info     | Management Server               | JMX mbean registered                     |
| 5/20/05 | 2:10 PM  | Info     | Management Server               | JMX mbean registered                     |
| 5/20/05 | 2:10 PM  | Info     | Management Server               | JMX mbean registered                     |
| 5/20/05 | 2:10 PM  | Info     | iona_services management server | com.iona.management.ProcessRegistered    |

**Figure 8:** *Events Console*

---

## Viewing the Events Console

---

### Overview

This section explains how to use the IONA Administrator Events Console. It includes the following:

- “Viewing Events in a Domain”.
  - “Refreshing the Event List”.
  - “Setting the Number of Events Displayed”.
  - “Setting the Event Threshold”.
  - “Information Displayed in the Event List”.
  - “Viewing Full Details of an Event”.
  - “Filtering Events”.
- 

### Viewing Events in a Domain

Events are always shown on a per-domain basis. To view events from a different domain, start a web console connecting to the domain's management service and launch the events console from there. For more details of prerequisites to starting the web console, see the *Management User's Guide* at

<http://www.iona.com/support/docs/orbix/6.3/admin.xml>.

---

### Refreshing the Event List

The event display shows an up-to-date list of events when first started. The display is not updated automatically. To refresh the display, click the **Refresh** button in the toolbar, as shown in Figure 24.



**Figure 9:** *Refresh Button*

---

### Setting the Number of Events Displayed

To set the maximum number of events being retrieved from the management server, click the drop-down box at the **Display Events** field at the top of the console.

---

### Setting the Event Threshold

The **Threshold** setting specifies the lowest severity of events that you want to include in the displayed list. There are four severities:

- Critical
- Error
- Warning
- Info

The highest event severity is *Critical* and the lowest is *Info*.

To set the events threshold, click the **Threshold** drop-down box at the top left of the console.

---

### Information Displayed in the Event List

The event list shows the following summary information about each event:

- Date and time of the event.
  - Severity of the event.
  - Agent that created the event.
  - Name of the event.
- 

### Viewing Full Details of an Event

To get comprehensive details of a particular event, simply click the event in the event list.

---

### Filtering Events

You can also customize the severity of events and apply filters to selectively view events by modifying **shared** filters for a domain. For more information, see the section on Management Service Configuration in the *Management User's Guide* at

<http://www.iona.com/support/docs/orbix/6.3/admin.xml>

## Viewing the Event Log


### Overview

This section explains how to open and view the IONA Administrator event log for a particular server.

**Note:** To view the event log for the IMS or CICS server adapter, the `plugins:local_log_stream:filename` configuration item must be set in the adapter's configuration scope.

### Opening the event log

To open the event log for a particular server, click the  `EventLog` option under that server name on the left display panel of your management service browser. This opens an **EventLog** panel for the server similar to that shown in [Figure 10](#).

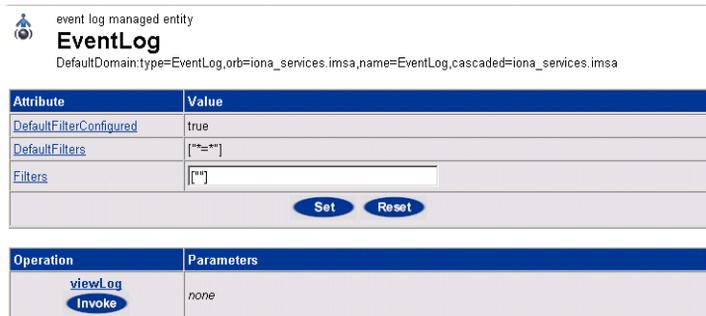

event log managed entity

### EventLog

DefaultDomain.type=EventLog,orb=iona\_services.imsa,name=EventLog,cascaded=iona\_services.imsa

| Attribute               | Value |
|-------------------------|-------|
| DefaultFilterConfigured | true  |
| DefaultFilters          | ["*"] |
| Filters                 | [""]  |

| Operation  | Parameters |
|--|------------|
| <a href="#">viewLog</a><br><input type="button" value="Invoke"/> | none       |

**Figure 10:** Example of an EventLog Panel

## Setting the log filters

You can use the **Filters** field to determine the level of logging information that is to be generated for a particular plug-in. For example, [Figure 11](#) shows a filters setting of "IT\_MFA=INFO\_HI+WARN+ERROR+FATAL", to generate logging information for CICS or IMS server adapter events.

event log managed entity  
**EventLog**  
 DefaultDomain.type=EventLog\_orb=iona\_services.imsa,name=EventLog,cascaded=iona\_services.imsa

| Attribute                               | Value                             |
|---|-----------------------------------|
| <a href="#">DefaultFilterConfigured</a> | true                              |
| <a href="#">DefaultFilters</a>          | [**=**]                           |
| <a href="#">Filters</a>                 | [IT_MFA=INFO_HI+WARN+ERROR+FATAL] |

| Operation  | Parameters |
|--|------------|
| <a href="#">viewLog</a><br><input type="button" value="Invoke"/> | none       |

**Figure 11:** Setting the Log Filters for the IT\_MFA Plug-in

To save a setting in the **Filters** field, click **Set**. If you want to override any changes and return to the prior settings, click **Reset**.

**Note:** The **Reset** button can only override settings that have not already been saved via the **Set** button.

## Opening the log viewer

Click the  button on the **Event Log** to open the **Log Viewer** panel. This displays all the logged events for the plug-in(s) that you specified when setting the log filters.

[Figure 12](#) shows an example of a logged event for an IMS server adapter contacted by the simple client demonstration supplied with your Orbix Mainframe installation.

|                                      |            |             |   |
|--------------------------------------|------------|-------------|---|
| Thu, 02 Jun 2005<br>11:08:02.0000000 | IT_MFA.209 | Information | Invoking on operation 'Simple/SimpleObject::call_me()' for transaction 'SIMPLESV' |
|--------------------------------------|------------|-------------|---|

**Figure 12:** Example of Logged Event for IMS Adapter in the Log Viewer

As shown in [Figure 12](#), the following information is displayed for each logged event:

- The date and time of the event.
- The subsystem it relates to.
- The level of event (that is, Information, Warning, or Error).
- Details of the event.

## Navigating the log viewer

It might not be possible for all event details to be displayed on one screen. To see details of more events, click the **Prev** and **Next** links on the **Log Viewer** as appropriate. If you click the **Back to Details** link, this reopens the **Event Log** panel.

# Enterprise Performance Logging

*IONA's performance logging plugins enable Orbix to integrate effectively with Enterprise Management Systems (EMS).*

---

**In this chapter**

This chapter contains the following sections:

|  |                         |
|--|-------------------------|
| <a href="#">Introduction</a>                           | <a href="#">page 44</a> |
| <a href="#">Configuring Performance Logging</a>        | <a href="#">page 45</a> |
| <a href="#">Logging Message Formats</a>                | <a href="#">page 51</a> |
| <a href="#">Remote Performance Logging</a>             | <a href="#">page 55</a> |
| <a href="#">Configuring Remote Performance Logging</a> | <a href="#">page 58</a> |

# Introduction

---

## Overview

Performance logging plugins enable Orbix to integrate effectively with *Enterprise Management Systems* (EMS). The performance logging plugins can also be used in isolation or as part of a custom-made solution.

Enterprise Management Systems enable system administrators and production operators to monitor enterprise-critical applications from a single management console. This enables them to quickly recognize the root cause of problems that may occur, and take remedial action (for example, if a machine is running out of disk space).

---

## Performance logging

When performance logging is configured, you can see how each Orbix server is responding to load. The performance logging plugins log this data to file or `syslog`. Your EMS can read the performance data from these logs, and use it to initiate appropriate actions, (for example, issue a restart to a server that has become unresponsive, or start a new replica for an overloaded cluster).

---

# Configuring Performance Logging

---

## Overview

This section explains how to manually configure performance logging. This section includes the following:

- [“Performance logging plugins”](#).
  - [“Monitoring Orbix requests”](#).
  - [“Logging to a file or syslog”](#).
  - [“Configuring a server ID”](#).
  - [“Configuring a client ID”](#).
  - [“Monitoring the Orbix work queue”](#).
  - [“Configuring the CICS adapter to use performance logging”](#).
- 

## Performance logging plugins

The performance logging component consists of three plugins:

**Table 1:** *Performance logging plugins*

| Plugin                  | Description  |
|-------------------------|--|
| Response time logger    | Monitors response times of requests as they pass through the Orbix binding chains. This can be used to collect response times for CORBA, RMI-IIOP or HTTP calls. |
| Request counter         | Performs the same function for Artix as the Response time logger does for Orbix.   |
| Response time collector | Periodically harvests data from the response time logger and request counter plugins and logs the results.   |
| MBean monitor           | Periodically harvests statistics associated with MBean attributes (for example, monitoring the length of the ORB work queue).                                    |

## Monitoring Orbix requests

You can use performance logging to monitor both Orbix server and client requests.

### Monitoring server requests

To monitor Orbix server requests, perform the following configuration steps:

1. Add `it_response_time_logger` to the servlet binding list for the server you wish to instrument. For example:

```
binding:servlet_binding_list= [
  "it_response_time_logger + it_servlet_context + it_character_encoding
  + it_locale + it_naming_context + it_exception_mapping + it_http_sessions
  + it_web_security + it_servlet_filters + it_web_redirector + it_web_app_activator "
];
```

2. Add `it_response_time_logger` to the server binding list for the server. For example:

```
binding:server_binding_list=[
  "it_response_time_logger+it_naming_context+CSI+j2eecs+OTS+it_security_role_mapping",
  "it_response_time_logger+it_naming_context+OTS+it_security_role_mapping",
  "it_response_time_logger+it_naming_context + CSI+j2eecs+it_security_role_mapping",
  "it_response_time_logger+it_naming_context+it_security_role_mapping",
  "it_response_time_logger+it_naming_context", "it_response_time_logger"
];
```

3. Add `it_response_time_logger` to the `orb_plugins` list for the server. For example:

```
orb_plugins=[
  "it_servlet_binding_manager", "it_servlet_context",
  "it_http_sessions", "it_servlet_filters", "http",
  "it_servlet_dispatch", "it_exception_mapping", "it_naming_context",
  "it_web_security", "it_web_app_activator",
  "it_default_servlet_binding", "it_security_service", "it_character_encoding",
  "it_locale", "it_classloader_servlet","it_classloader_mapping",
  "it_web_redirector", "it_deployer",
  "it_response_time_logger"
];
```

### Monitoring client requests

To monitor Orbix client requests, add `it_response_time_logger` to the client binding list for the server. For example:

```
binding:client_binding_list = [
  "it_response_time_logger+DemoOS+OTS+POA_Coloc", "it_response_time_logger+DemoOS+POA_Coloc",
  "it_response_time_logger+OTS+POA_Coloc", "it_response_time_logger+POA_Coloc",
  "it_response_time_logger+DemoOS+OTS+GIOP+IIOP", "it_response_time_logger+DemoOS+GIOP+IIOP",
  "it_response_time_logger+OTS+GIOP+IIOP", "it_response_time_logger+GIOP+IIOP",
  "it_response_time_logger"
];
```

### Logging to a file or syslog

You can configure the collector plugin to log data either to a file or to syslog.

#### C++ configuration

The following example configuration for a C++ application results in performance data being logged to

`/var/log/my_app/perf_logs/treasury_app.log` every 90 seconds:

```
plugins:it_response_time_collector:period = "90";
plugins:it_response_time_collector:filename =
"/var/log/my_app/perf_logs/treasury_app.log";
```

If you do not specify the response time period, it defaults to 60 seconds.

**Note:** You may only log data to a file in z/OS UNIX System Services.

#### Logging to a syslog daemon

You can configure the collector to log to a syslog daemon or Windows event log, as follows:

```
plugins:it_response_time_collector:system_logging_enabled =
  "true";
plugins:it_response_time_collector:syslog_appID = "treasury";
```

The `syslog_appid` enables you to specify your application name that is prepended to all syslog messages. If you do not specify this, it defaults to `iona`.

---

**Configuring a server ID**

You can configure a server ID that will be reported in your log messages. This server ID is particularly useful in the case where the server is a replica that forms part of a cluster.

In a cluster, the server ID enables management tools to recognize log messages from different replica instances. You can configure a server ID as follows:

```
plugins:it_response_time_collector:server-id = "Locator-1";
```

This setting is optional; and if omitted, the server ID defaults to the ORB name of the server. In a cluster, each replica must have this value set to a unique value to enable sensible analysis of the generated performance logs.

---

**Configuring a client ID**

You can also configure a client ID that will be reported in your log messages. Specify this using the `client-id` configuration variable, for example:

```
plugins:it_response_time_collector:client-id = "my_client_app";
```

This setting enables management tools to recognize log messages from client applications. This setting is optional; and if omitted, it is assumed that that a server is being monitored.

---

**Monitoring the Orbix work queue**

The `it_mbean_monitoring` plug-in enables you to periodically harvest statistics associated with MBean attributes. This plug-in can be used to monitor the work queue MBean associated with a particular ORB. Work queues are used to control the flow incoming requests.

To monitor an ORB work queue MBean, perform the following steps:

1. Add `it_mbean_monitoring` to the `orb_plugins` list of the ORB whose work queue you wish to monitor.

```
orb_plugins = ["local_log_stream", "iiop_profile", "giop",  
              "iiop", "it_mbean_monitoring"];
```

2. When `it_mbean_monitoring` is on your `orb_plugins` list, you can enable monitoring of the ORB work queue using the following variable:

```
plugins:it_mbean_monitoring:workqueue = "true";
```

3. The MBean attributes that are monitored by the plug-in are sampled periodically. The sampling interval is specified in milliseconds using the following variable:

```
plugins:it_mbean_monitoring:sampling_period = "100";
```

4. The response time collector plug-in is used to periodically log the MBean data. You must specify the following variables for the collector:

```
plugins:it_response_time_collector:period = "10";
```

### C++ applications

```
plugins:it_response_time_collector:filename = "testing_mbeans.log";
```

For more information, see also [“MBean log message formats” on page 53](#).

### Configuring the CICS adapter to use performance logging

To enable the CICS server adapter to use performance logging, perform the following configuration steps:

1. Add `it_response_time_logger` to the ORB plugins list for the adapter. For example:

```
orb_plugins = ["...", "it_response_time_logger"];
```

**Note:** Ensure that you have a management license available.

2. Add `it_response_time_logger` to the server binding list for the adapter. For example:

```
binding:server_binding_list = ["it_response_time_logger",
    ""];
```

**Note:** In this case, the "" at the end of the server binding list is required.

3. Add the following configuration items to the `iona_services.cicsa` scope:

```
# update the log every 30 seconds
plugins:it_response_time_collector:period = "30";
# the id of the server for the log output
plugins:it_response_time_collector:server-id = "ORXCICSA";
# location of the log
plugins:it_response_time_collector:filename =
    "/home/fred/mycicsperf.log";
```

The following is an example of output from the performance log where a nested sequences client, a simple client, an `mfa list` and an `mfa resolve` have been run against the CICS adapter:

```
2006-10-18 10:08:22 server=ORXCICSA status=starting_up
2006-10-18 10:08:22 server=ORXCICSA status=running
2006-10-18 10:08:52 server=ORXCICSA status=running
2006-10-18 10:09:22 server=ORXCICSA status=running
2006-10-18 10:09:22 server=ORXCICSA [ operation=test_bounded ] count=1 avg=110 max=110 min=110
    int=30001 oph=119
2006-10-18 10:09:22 server=ORXCICSA [ operation=test_unbounded ] count=1 avg=809 max=809 min=809
    int=30001 oph=119
2006-10-18 10:09:52 server=ORXCICSA status=running
2006-10-18 10:09:52 server=ORXCICSA [ operation=call_me ] count=1 avg=793 max=793 min=793
    int=29998 oph=120
2006-10-18 10:10:22 server=ORXCICSA status=running
2006-10-18 10:10:22 server=ORXCICSA [ operation=get_currentMappings ] count=1 avg=0 max=0 min=0
    int=30000 oph=120
2006-10-18 10:10:52 server=ORXCICSA status=running
2006-10-18 10:11:22 server=ORXCICSA status=running
2006-10-18 10:11:52 server=ORXCICSA status=running
2006-10-18 10:12:22 server=ORXCICSA status=running
2006-10-18 10:12:22 server=ORXCICSA [ operation=resolve ] count=1 avg=0 max=0 min=0 int=29999
    oph=120
2006-10-18 10:12:52 server=ORXCICSA status=running
2006-10-18 10:12:57 server=ORXCICSA status=shutdown_started
2006-10-18 10:12:57 server=ORXCICSA status=shutdown_complete
```

# Logging Message Formats

## Overview

This section describes the logging message formats used by IONA products. It includes the following:

- [“Orbix log message format”](#).
- [“Artix log message format”](#).
- [“MBean log message formats”](#).
- [“Simple life cycle message formats”](#).

## Orbix log message format

Performance data is logged in a well-defined format. For Orbix applications, this format is as follows:

```
YYYY-MM-DD HH:MM:SS server=serverID [operation=name] count=n
avg=n max=n min=n int=n oph=n
```

**Table 2:** *Orbix log message format arguments*

| Argument  | Description  |
|-----------|--|
| server    | The server ID of the process that is logging the message.  |
| operation | The name of the operation for CORBA invocations or the URI for requests on servlets.   |
| count     | The number of operations of invoked (IIOP).<br>or<br>The number of times this operation or URI was logged during the last interval (HTTP). |
| avg       | The average response time (milliseconds) for this operation or URI during the last interval.   |
| max       | The longest response time (milliseconds) for this operation or URI during the last interval.   |
| min       | The shortest response time (milliseconds) for this operation or URI during the last interval.  |

**Table 2:** *Orbix log message format arguments*

| Argument | Description   |
|----------|---|
| int      | The number of milliseconds taken to gather the statistics in this log file. |
| oph      | Operations per hour.  |

**Artix log message format**

The format for Artix log messages is as follows:

```
YYYY-MM-DD HH:MM:SS server=serverID [namespace=nnn service=sss
port=ppp operation=name] count=n avg=n max=n min=n int=n
oph=n
```

**Table 3:** *Artix log message format arguments*

| Argument  | Description   |
|-----------|---|
| server    | The server ID of the process that is logging the message. |
| namespace | An Artix namespace.                                       |
| service   | An Artix service.   |
| port      | An Artix port.  |

The combination of namespace, service and port above denote a unique Artix endpoint. The description for the remainder of the fields are the same as for Orbix messages.

**MBean log message formats**

The format for the mbean monitoring log message is as follows:

```
12004-09-23 15:24:17,093 monitored_object=full-object-name-for-mbean
object_alias=user-friendly-name count=n avg=n max=n min=n period=n
```

**Table 4:** *MBean log message format arguments*

|                  |  |
|------------------|--|
| monitored_object | The MBean being monitored (for example, DefaultDomain:type=AutoWorkqueue,orb=_it_orb_id_1,name=Workqueue_1). |
| object_alias     | A user-friendly name for MBean being monitored (for example, test.management.logging_mbeans.ORBWorkQueue).   |
| count            | The number of times the MBean attribute has been sampled during this logging period.                         |
| avg              | The average value for the attribute being monitored.   |
| max              | The maximum value for the attribute being monitored.   |
| min              | The minimum value for the attribute being monitored.   |
| period           | The sampling interval specified in milliseconds.   |

**Simple life cycle message formats**

The server also logs simple life cycle messages. All servers share the following common format.

```
YYYY-MM-DD HH:MM:SS server=serverID status=current_status
```

**Table 5:** *Simple life cycle message format arguments*

| Argument | Description  |
|----------|--|
| server   | The server ID of the process that is logging the message.  |
| status   | A text string describing the last known status of the server (for example, <code>starting_up</code> , <code>running</code> , <code>shutting_down</code> ). |

---

# Remote Performance Logging

---

## Overview

The performance logging plug-ins can be configured to log data to a local file or to a remote endpoint. Depending on your specific architecture, it might not always be desirable or feasible to deploy the required management tools on a particular platform (for example, on z/OS). In this case, it would not be appropriate to persist the performance logging data to a local file, because there would be no local application to consume it.

In some situations, NFS or a similar file sharing mechanism might be used to persist data across your distributed system. However, security and performance concerns often prevent the use of such protocols. In such cases, Orbix provides a remote logging facility for the purposes of sending logging data to a remote endpoint where the data can be persisted and subsequently consumed by an application that is native to that remote system.

## Components of a remote logging framework

---

The components of a remote logging framework are as follows:

- The performance logging *collector* plug-in runs in a deployed application on the source host. This is the host that sends its logging data to a remote endpoint. The collector is configured to harvest the required performance logging data and to write this data to a remote CORBA endpoint (instead of, for example, to a local file on the source host).

**Note:** Remote logging is only supported in the C++ version of the performance logging collector plug-in.

- The *remote logger daemon* is an Orbix application that is deployed on the remote target host. It loads the remote log receiver servant, which accepts the performance logging data from the source applications and logs this data to a local file on the target host.
- The *EMS component* (for example, a Tivoli or BMC Patrol agent) runs on the remote target host. It consumes the data from the file and propagates the performance information to the centralized region manager.

Figure 13 shows how remote logging works.

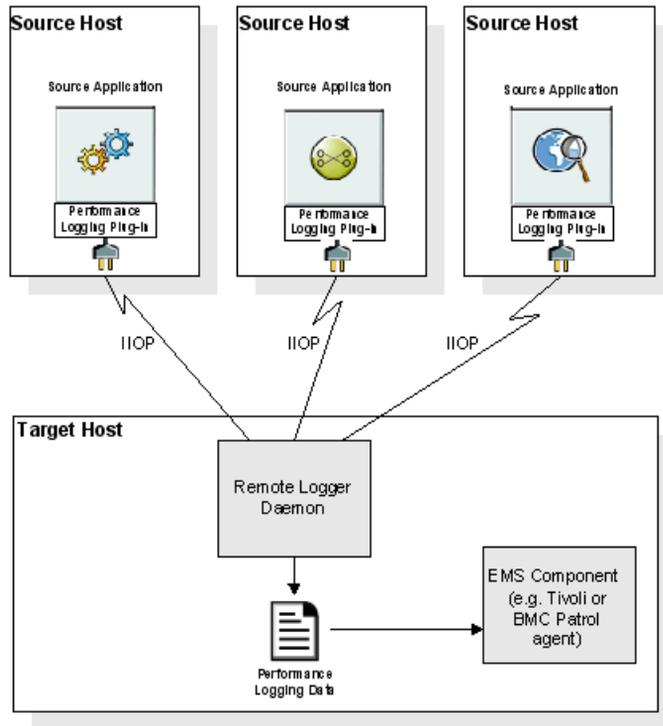


Figure 13: Remote Logging Framework

## Deploying a remote logger daemon

---

As explained in [“Components of a remote logging framework” on page 55](#), the remote logger daemon loads the remote log receiver servant, which accepts the performance logging data from the source application(s), and logs this data to a local file on the target host. You may deploy the remote logger plug-in in any Orbix application. The remote logger plug-in should be deployed in a standalone container whose sole purpose is to log data from one or more source applications. The local file on the remote host can then be consumed by the EMS agent running on that host, or used as part of some custom-made solution.

---

## Points to note

The following points should be noted:

- IIOP is used for the data communication between the collector and the remote logger daemon. This adds very low overhead to the logging payload, because it uses a binary protocol on the wire (CDR).
- To secure the message transfer, IIOP/TLS can be used for data communication between the collector and the remote logger daemon.
- The timestamps embedded in the remote logging data are localized to the specific source system on which the monitored application is running. You must ensure that the system clocks on all participating systems are synchronized to an acceptable level, as governed by your EMS or your custom-made solution.

---

# Configuring Remote Performance Logging

---

## Overview

This section explains how to configure remote logging, which enables you to send logging data to a remote endpoint on another host rather than to a local file.

---

## Configuring the remote logger daemon

To configure the remote logger daemon that runs on the remote target host, add the following configuration scope and settings to your Orbix configuration domain:

```
...
remote_logger_daemon
{
  orb_plugins = ["local_log_stream", "remote_log_receiver"];
  event_log:filters = ["IT_MGMT_LOGGING=*"];

  plugins:remote_log_receiver:log_filename =
    "/var/logs/remote_perflogs.txt";
  plugins:remote_log_receiver:ior_filename =
    "/var/publish/logger_ref.txt";
  plugins:remote_log_receiver:iiop:addr_list = ["host:port"];
  plugins:remote_log_receiver:prerequisite_plugins =
    ["iiop_profile", "giop", "iiop"];
};
...
```

**Note:** You can add this configuration scope directly to your configuration file, or create a separate configuration file that includes your existing configuration file.

### Remote logging configuration settings

The settings for the `remote_log_receiver` plug-in are explained as follows:

|  |   |
|--|---|
| <code>plugins:remote_log_receiver:<br/>log_filename</code>         | This is the local file on the remote host to which all logs are directed.   |
| <code>plugins:remote_log_receiver:<br/>ior_filename</code>         | When the remote logger daemon is started, it writes a stringified Interoperable Object Reference (IOR) to the file specified by this configuration item. This IOR may be subsequently made available to the source applications that are acting as clients of the remote logger. However, this is not required if the source applications use a corbaloc URL rather than an IOR to contact the remote logger. |
| <code>plugins:remote_log_receiver:<br/>iiop:addr_list</code>       | This specifies the hostname or IP address of the host on which the remote logger is running, and the port that it uses to listen for logging requests.  |
| <code>plugins:remote_log_receiver:<br/>prerequisite_plugins</code> | This must specify the IIOP plug-ins that the remote logger needs for communication with the source host(s).   |

### TLS security

If you are using TLS security:

- Ensure that you replace the `plugins:remote_log_receiver:iiop:addr_list` configuration item with `plugins:remote_log_receiver:iiop_tls:addr_list`.
- Ensure that the `plugins:remote_log_receiver:prerequisite_plugins` configuration item lists `iiop_tls` rather than `iiop`.

## Configuring a deployed application on the source host

You must also configure your deployed application to use performance logging with the remote logger capability. For the purposes of illustration, it describes the steps that are required to configure an Orbix Mainframe application.

### Configuration steps

To enable a deployed application (for example, on z/OS) to use performance logging with the remote logger capability:

1. Ensure that the remote logger daemon has been configured correctly and deployed on the target host, as described in [“Configuring the remote logger daemon” on page 58](#).
2. Open the configuration domain for your deployed application. By default, this is `orbixhlq.DOMAINS(FILEDOMA)` for Orbix Mainframe applications.
3. Go to the appropriate configuration scope for your application.
4. Add `it_response_time_logger` to the end of the ORB plug-ins list setting. Also, ensure that IIOPI is enabled for the application, for example:

```
orb_plugins = ["local_log_stream", "iiop_profile", "giop",  
              "iiop", ..., "it_response_time_logger"];
```

**Note:** Ensure that you have a management license available.

5. Add `it_response_time_logger` to the server binding list for the application. For example:

```
binding:server_binding_list =  
  ["SOAP+it_response_time_logger",  
   "it_response_time_logger"];
```

## 6. Add the following collector plug-in configuration variables:

```
# update the log every 30 seconds
plugins:it_response_time_collector:period = "30";

# the id of the server for the log output
plugins:it_response_time_collector:server-id = "server-id";

# the remote endpoint details:
plugins:it_response_time_collector:remote_logging_enabled =
  "true";
initial_references:IT_PerfLoggingReceiver:reference =
  "corbaloc:iiop:1.2@remote_host:1234/IT_PerfLoggingReceiver ";
```

**Note:** Ensure that the *server-id* value is replaced with the actual server ID for the log output (for example, *cics-server-adapter-1*).

**Example output**

The following is example output from the performance log on the remote file system where a number of different operations have been run against the application:

```
2006-10-18 10:08:22 server=cics-server-adapter-1 status=starting_up
2006-10-18 10:08:22 server=cics-server-adapter-1 status=running
2006-10-18 10:08:52 server=cics-server-adapter-1 status=running
2006-10-18 10:09:22 server=cics-server-adapter-1 status=running
2006-10-18 10:09:22 server=cics-server-adapter-1 [ operation=test_bounded ] count=1 avg=110
    max=110 min=110
int=30001 oph=119
2006-10-18 10:09:22 server=cics-server-adapter-1 [ operation=test_unbounded ] count=1 avg=809
    max=809 min=809
int=30001 oph=119
2006-10-18 10:09:52 server=cics-server-adapter-1 status=running
2006-10-18 10:09:52 server=cics-server-adapter-1 [ operation=call_me ] count=1 avg=793 max=793
    min=793
int=29998 oph=120
2006-10-18 10:10:22 server=cics-server-adapter-1 status=running
2006-10-18 10:10:22 server=cics-server-adapter-1 [ operation=_get_currentMappings ] count=1 avg=0
    max=0 min=0
int=30000 oph=120
2006-10-18 10:10:52 server=cics-server-adapter-1 status=running
2006-10-18 10:11:22 server=cics-server-adapter-1 status=running
2006-10-18 10:11:52 server=cics-server-adapter-1 status=running
2006-10-18 10:12:22 server=cics-server-adapter-1 status=running
```

```
2006-10-18 10:12:22 server=cics-server-adapter-1 [ operation=resolve ] count=1 avg=0 max=0 min=0  
int=29999 oph=120  
2006-10-18 10:12:52 server=cics-server-adapter-1 status=running  
2006-10-18 10:12:57 server=cics-server-adapter-1 status=shutdown_started  
2006-10-18 10:12:57 server=cics-server-adapter-1 status=shutdown_complete
```

# Part 2

## Programmer's Guide

---

### **In this part**

This part contains the following chapters:

|  |                          |
|--|--------------------------|
| <a href="#">Introduction to Application Management</a> | <a href="#">page 65</a>  |
| <a href="#">Instrumenting CORBA C++ Applications</a>   | <a href="#">page 77</a>  |
| <a href="#">MBean Document Type Definition</a>         | <a href="#">page 111</a> |



# Introduction to Application Management

*This chapter gives an overview of Orbix enterprise application management. It introduces the IONA Administrator management tools, Sun's Java Management Extensions API, and IONA's Management API. It also provides an overview of management programming tasks.*

---

## **In this chapter**

This chapter contains the following sections:

|  |                         |
|--|-------------------------|
| <a href="#">Introduction to IONA Administrator</a>         | <a href="#">page 66</a> |
| <a href="#">Introduction to Java Management Extensions</a> | <a href="#">page 68</a> |
| <a href="#">Introduction to the Orbix Management API</a>   | <a href="#">page 71</a> |
| <a href="#">Overview of Management Programming Tasks</a>   | <a href="#">page 73</a> |

---

# Introduction to IONA Administrator

---

## Overview

IONA Administrator is a set of tools that enable administrators to configure, monitor and control distributed applications at runtime. Orbix provides seamless management of all IONA products, or any applications developed using those products, across different platform and programming language environments. IONA Administrator includes the following main components:

- “IONA Administrator Web Console”.
- “IONA Administrator Management Service”.
- “IONA Configuration Explorer”.
- “Orbix Configuration Authority”.

---

## IONA Administrator Web Console

The *IONA Administrator Web Console* provides a web browser interface to IONA Administrator. It enables you to manage applications and application events from anywhere, without the need for download or installation. It communicates with the management service using HTTP (Hypertext Transfer Protocol), as illustrated in [Figure 14](#).

---

## IONA Administrator Management Service

The *IONA Administrator Management Service* is the central point of contact for accessing management information in a *domain*. A domain is an abstract group of managed server processes within a physical location. The management service is accessed by both the IONA Administrator Web Console and by the *IONA Configuration Explorer*.


**Note:** Managed z/OS applications can be written in C++. CORBA C++ applications use the management service process, `iona_services.management`.

---

## IONA Configuration Explorer

The *IONA Configuration Explorer* is a Java graphical user interface (GUI) that enables you to manage your configuration settings. It communicates with your Configuration Repository (CFR) or configuration file, using IIOP (Internet Inter-ORB Protocol).

Figure 14 shows how IONA Administrator interacts with managed applications to provide management capabilities.

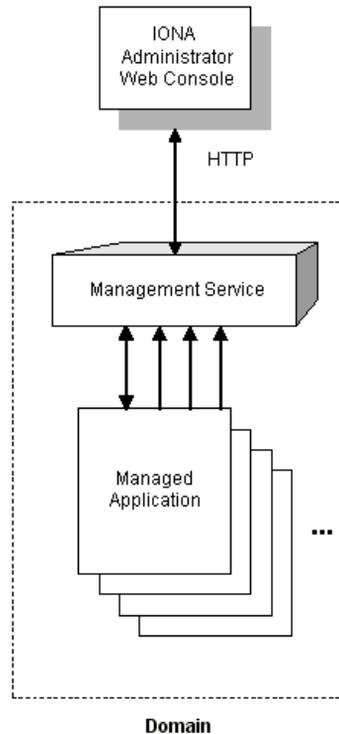

**Figure 14:** *IONA Administrator Components*

---

### Orbix Configuration Authority

The *Orbix Configuration Authority* provides a web browser interface to descriptive information about all Orbix configuration settings. You can browse and search for information about Orbix configuration variables in your CFR or configuration file.

---

### Further information

For detailed information about using IONA Administrator, see the *Management User's Guide*.

---

# Introduction to Java Management Extensions

---

## Overview

Java Management Extensions (JMX) is a standards-based API from Sun that provides a framework for adding enterprise management capabilities to user applications. This section explains the main JMX concepts and shows how JMX and Orbix interact to provide enterprise management for Java applications. This includes both J2EE and CORBA Java servers.

This section includes the following:

- [“MBeans”](#).
- [“The MBean server”](#).
- [“Management instrumentation”](#).
- [“Standard and Dynamic MBeans”](#).
- [“Further information”](#).

---

## MBeans

The concept of an *MBean* (a managed bean) is central to JMX. An MBean is simply an object with associated attributes and operations. It acts as a handle to your application object, and enables the object to be managed.

For example, a `Car` MBean object, with an associated `speed` attribute, and `start()` and `stop()` operations, is used to represent a car application object, with corresponding attributes and operations. Application developers can express their application objects as a series of related MBeans. This enables administrators to manage these application objects using an administration console (for example, IONA Administrator).


---

## The MBean server

All the MBeans created by developers are managed and controlled by a MBean server, which is provided by JMX. All MBeans that are created must be registered with an MBean server so that they can be accessed by management applications, such as Orbix.

[Figure 15](#) shows a Java example of the JMX components at work. It shows how these components interact with Orbix to provide management capability for your application.

For simplicity, this diagram only shows one MBean. An application might have multiple MBeans representing the application objects that you wish to manage. In addition, new instrumentation code is not solely confined to the MBean. You will need to add some new code to your sever implementation (for example, to enable your server to contact the management service).

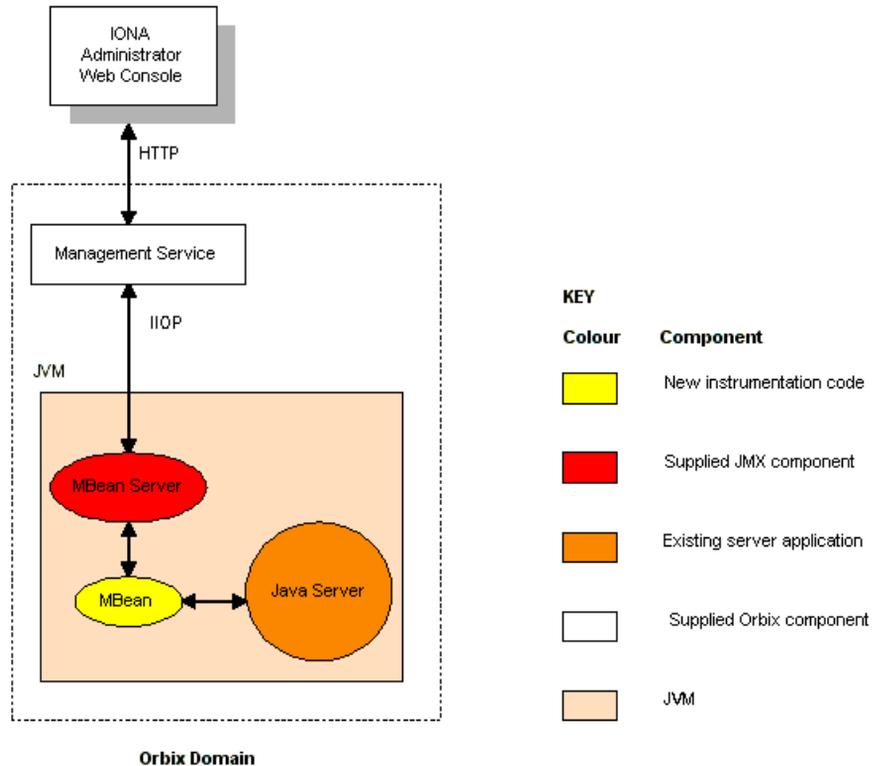

**Figure 15:** JMX Management and Orbix

## Management instrumentation

Adding JMX management code to your application is also known as adding management *instrumentation* or *instrumenting* your existing application. These standard management terms are used throughout this book.

Figure 15 shows the new management instrumentation code as an MBean. MBeans must be added to your application to enable it for management.

---

**Standard and Dynamic MBeans**

The MBeans discussed so far in this chapter are referred to as *standard MBeans*. These are ideally suited to straightforward management scenarios where the structure of managed data is well defined and unlikely to change often. JMX specifies another category of MBeans called *dynamic MBeans*. These are designed for when the structure of the managed data is likely to change regularly during the lifetime of the application.

Implementing dynamic MBeans is more complex than for standard MBeans. If your management solution needs to provide integration with existing and future management protocols and platforms, using dynamic MBeans could make it more difficult to achieve this goal. The examples cited in this book use standard MBeans only.

---

**Further information**

For more information about JMX, see Sun's JMX Instrumentation and Agent Specification, and Reference Implementation Javadoc. These documents are available online at:

<http://java.sun.com/products/JavaManagement/>

For information on how to integrate IONA Administrator with other general purpose management applications (for example, HP Openview™ or CA UniCenter™), see the "SNMP Integration" chapter in the *Management User's Guide*.

---

# Introduction to the Orbix Management API

---

## Overview

JMX does not specify how MBeans communicate at the network protocol level. IONA's Orbix Management API is used to enable network communications for MBeans. This API also enables you to specify relationships between MBeans, and display MBeans in IONA Administrator. This section includes the following:

- [“The IIOP Adaptor”](#).
- [“Defining MBean relationships”](#).
- [“C++ Instrumentation”](#).

---

## The IIOP Adaptor

The Orbix Management API enables network communication between the MBean server and the management service over IIOP (Internet Inter-ORB Protocol). This is performed using an IIOP adapter, which is contained in the ORB plugin for the management service.

[Figure 15](#) shows a J2EE example of this IIOP communication. This cross-platform API also enables communication for CORBA Java and C++ servers.

---

## Defining MBean relationships

The Orbix Management API also enables you to specify hierarchical parent-child relationships between MBeans. For example, you might want to show relationships between your application server and its lower-level processes. These relationships can then be displayed in the IONA Administrator Web Console.

[Figure 16](#) shows example parent-child relationships displayed in the left pane of the IONA Administrator Web Console.

The screenshot shows the IONA Administrator web interface in Microsoft Internet Explorer. The address bar shows `http://localhost:8885/admin/index.do`. The left pane displays a tree view of a `sample-domain` with the following structure:

- sample-domain
  - Servers
    - FNBMiddleTier
      - iPAS.Server
        - Processes
          - iPAS.Server.Default
            - J2EEServer
              - iPAS.Server.Default
                - Containers
                  - JMX\_Examples Ear (selected)
                  - Data Sources
                - ORBs
              - iona\_services.naming
              - FNBMainframe
              - Management Server

The right pane displays the details for the `JMX_Examples Ear` MBean:

Dynamic MBean for managing Deployed Applications  
**JMX\_Examples Ear**  
 iPAS.type=Container,name=JMX\_Examples  
 Ear,J2EEServer=iPAS.Server.Default,cascaded=iPAS.Server.Default

| Attribute       | Value                            |
|-----------------|----------------------------------|
| CreatedBy       | smccarth                         |
| CreatedOn       | Tue Jan 14 14:50:54 GMT 2003     |
| Uptime          | 23 hours, 42 minutes, 44 seconds |
| RefreshInterval | 0                                |
| Modules         | { iBank.example }                |

Buttons: Set, Reset

| Operation          | Parameters |
|--------------------|------------|
| refresh<br>Invoke  | none       |
| undeploy<br>Invoke | none       |

Footer: iPAS.type=Container,name=JMX\_Examples Ear,J2EEServer=iPAS.Server.Default,cascaded=iPAS.Server.Default Local intranet

Figure 16: Example Parent–Child Relationship

## C++ Instrumentation

The concept of an MBean is a Java term that comes from JMX. The C++ version of the Orbix Management API uses the generic concept of a *Managed Entity* instead of an MBean. A C++ Managed Entity is functionally equivalent to the Java MBean. It acts as a handle to your application object, and enables the object to be managed.

The C++ version of the Orbix Management API is defined in IDL (Interface Definition Language).

For more details of the Orbix Management API, see the *Orbix Management IDLdoc*.

---

# Overview of Management Programming Tasks

---

## Overview

This section gives an overview of the typical management programming tasks. These include the following:

- [“Identifying tasks to be managed”](#).
- [“Writing your MBeans”](#).
- [“Registering your MBeans with the MBean server”](#).
- [“Unregistering your MBeans”](#).
- [“Defining relationships between MBeans”](#).

These tasks are explained in more detail in [“Instrumenting CORBA C++ Applications” on page 77](#).

---

## Identifying tasks to be managed

Before adding any management code to an application, you must decide on the application tasks that you wish the administrator to manage.

Deciding which tasks should be managed varies from application to application. This depends on the nature of the application, and on the type of runtime administration that is required. Typical managed tasks include monitoring the status of an application (for example, whether it is active or inactive), and controlling its operation (for example, starting or stopping the application).

---

## Writing your MBeans

When you have decided which parts of your application need to be managed, you can define and implement MBeans to satisfy your management objectives. Each MBean object must implement an interface ending with the term `MBean` (for example, `CarMBean`).

To expose its attributes, an MBean interface must declare a number of get and set operations. If get operations are declared only, the MBean attributes are read-only. If set operations are declared, the MBean attributes are writable.

### Registering your MBeans with the MBean server

Registering application MBeans with the MBean server enables them to be monitored and controlled by the IONA Administrator. Choosing when to register or expose your MBeans varies from application to application. However, there are two stages when all applications create and register MBeans:

**During application initialization.** During any application initialization sequence, a set of objects is created that represents the core functionality of the application. After these objects are created, MBeans should also be created and registered, to enable basic management of that application.

**During normal application runtime.** During normal application runtime, new objects are created as a result of internal or external events (for example, an internal timer, or a request from a client). When new objects are created, corresponding MBeans can be created and registered, to enable management of these new application components. For example, in a bank example when a new account is created, a new account MBean would be also be created and registered with the MBean server.

---

### Unregistering your MBeans

You might wish to unregister an MBean in response to an administrator's interaction with the system. For example, if a bank teller session is closed, it would be appropriate to unregister a corresponding session MBean. This ensures that the MBean will no longer be displayed as part of the application that is being managed.

---

### Defining relationships between MBeans

You can use the Orbix Management API to define parent-child relationships between MBeans. These relationships are then displayed in the IONA Administrator Web Console, as shown in [Figure 16 on page 72](#).

Parent-child relationships are no longer displayed in the console when the MBean is unregistered by the application (for example, if a bank account is closed).

**Instrumentation demonstration**

---

An instrumentation demonstration is provided in the UNIX System Services component of your Orbix Mainframe installation, as follows (where *install\_dir* represents the full path to your Orbix Mainframe installation on UNIX System Services):

```
install_dir/asp/Version/demos/corba/pdk/instrumented_plugin
```

This instrumentation demonstration illustrates how to use the main Management APIs and how to write your own Generic Service application. You can use an ORB plug-in approach to build the Management code, to instrument existing services such as the CICS and IMS server adapters.



# Instrumenting CORBA C++ Applications

*This chapter explains how to use the Orbix C++ Management API to enable an existing CORBA C++ application for management. It uses the CORBA instrumented\_plugin demo as an example.*

---

**In this chapter**

This chapter contains the following sections:

|   |          |
|---|----------|
| Step 1—Identifying Tasks to be Managed    | page 78  |
| Step 2—Defining your MBeans               | page 82  |
| Step 3—Implementing your MBeans           | page 88  |
| Step 4—Initializing the Management Plugin | page 102 |
| Step 5—Creating your MBeans               | page 104 |
| Step 6—Connecting MBeans Together         | page 106 |

---

# Step 1—Identifying Tasks to be Managed

---

## Overview

Before adding management code to an application, you must decide on the tasks in your application that you wish to be managed by a system administrator. Only then should you start thinking about adding management instrumentation code to your existing application. This section includes the following:

- “Existing functionality”.
  - “New management tasks”.
  - “Planning your programming steps”.
  - “Location of the management code”.
- 

## Existing functionality

The `instrumented_plugin` example adds management capability to an existing CORBA C++ application. This is a simple "Hello World" application, where the client application reads the server's object reference from a file.

For details of how to run the instrumented plugin application, see the `README_CXX.txt` file in the following Orbix directory:

```
<install-dir>/asp/Version/demos/corba/pdk/instrumented_plugin
```

---

## New management tasks

The new management instrumentation code added to `instrumented_plugin` application enables administrators to perform the following additional tasks:

- Monitor the status of the `Hello` server (active or inactive).
- Monitor the number of times that the client reads the server's object reference.
- Set a hello text message.
- Invoke a weather forecast with specified text values.
- Shutdown the `Hello` server.

Administrators can perform these tasks using the IONA Administrator Console, shown in [Figure 17](#).

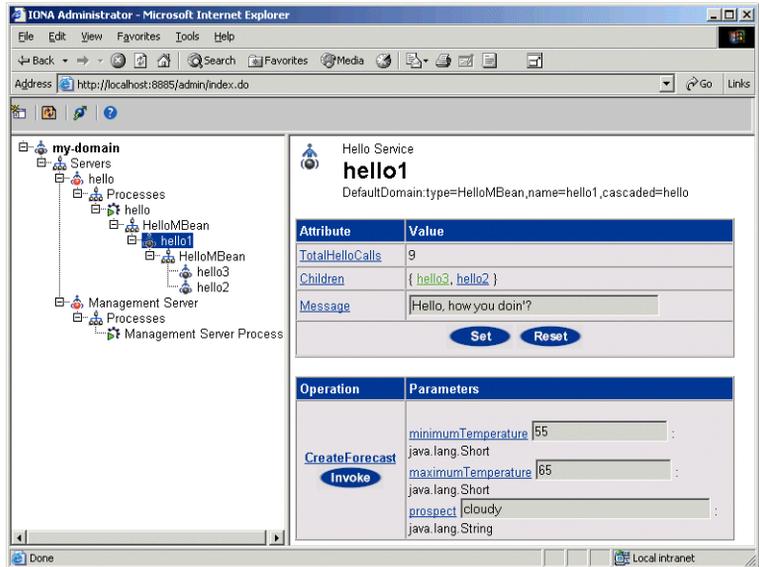


Figure 17: Instrumented Plugin in IONA Administrator

### Planning your programming steps

When you have identified your management tasks, you should think carefully about how exactly you wish to add the new management code to your existing application. For example, how much of the new code you will add to existing files, and how much will be in new files.

In the `instrumented_plugin` example, the instrumentation code is part of the service and is initialized when the service is initialized. For larger applications, you might wish to keep new instrumentation files in a separate directory.

This chapter explains how Orbix C++ management code was added to the `instrumented_plugin` application, and shows the standard programming steps. For example, defining and implementing your MBeans, and defining relationships between MBeans.

**Note:** When instrumenting CORBA C++ servers, you do not need to make any changes to the CORBA IDL. You can enable your application for management simply by adding new MBean instrumentation code to your CORBA C++ implementation files.

### Location of the management code

You should first decide where you wish to store your new management code. All source code for the `instrumented_plugin` application is stored in the following directory:

```
<install-dir>/asp/Version/demos/corba/pdk/instrumented_plugin/
```

The management code for the CORBA C++ server is stored in the following directory:

```
../instrumented_plugin/cxx_server
```

The following files are discussed in detail in this chapter

- `hello_mbean.h`
- `hello_mbean.cxx`
- `hello_world_impl.cxx`

For larger applications, it is advised that you to store your management code in a separate `management` directory. This will make your application more modular, and easier to understand.

### Instrumented plugin overview

Figure 18 shows the main components of the `instrumented_plugin` application. In this simple example, there is only one C++ MBean, the `HelloBean`.

Most of the key management programming tasks in this example are performed in the `HelloWorld` server implementation (`hello_world_impl.cxx`). For example, management initialization, creating the MBean, and displaying MBeans in the navigation tree of the console. The server implementation interacts with the MBean implementation to perform these tasks.

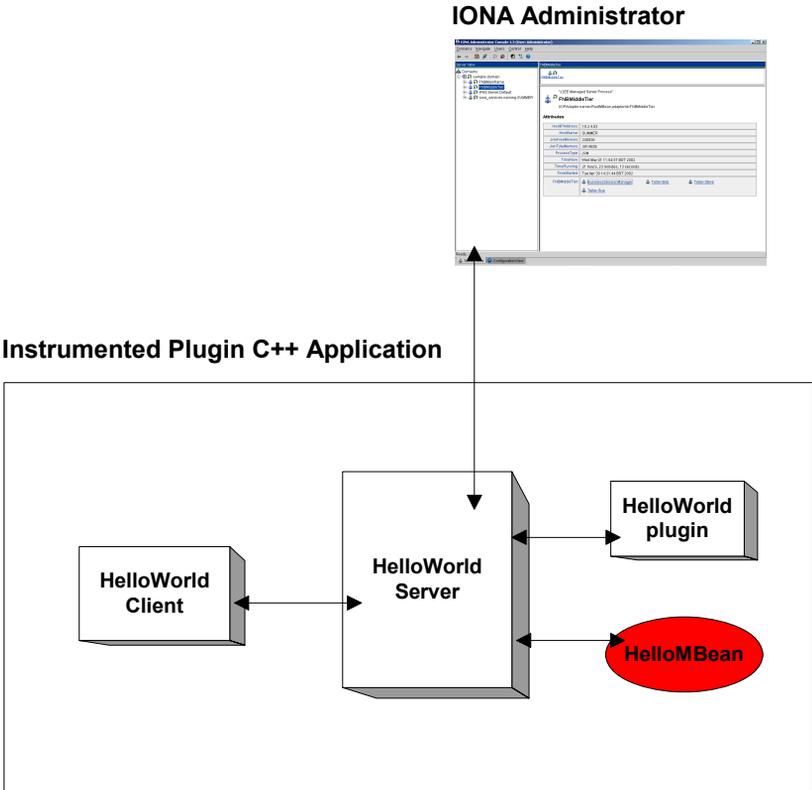


Figure 18: Instrumented Plugin Application Overview

---

## Step 2—Defining your MBeans

---

### Overview

When you have planned which parts of your application need to be managed, you can then define MBeans to satisfy your management objectives. This section shows how to define an example MBean header file for the `instrumented_plugin` application. This section includes the following:

- [“Managed Entities and MBeans”](#).
- [“Rules for MBean declarations”](#).
- [“Example MBean declaration”](#).
- [“Example private description”](#).
- [“Further information”](#).

---

### Managed Entities and MBeans

The C++ version of the Orbix Management API is based around the concept of a *Managed Entity*. This is similar to the JMX MBeans that are used by Java Programmers. A managed entity acts as a handle to your application object, and enables the object to be managed. The terms managed entity and MBean are used interchangeably in this document.

The Orbix C++ Management API is defined in CORBA IDL (Interface Definition Language). For full details of the Orbix Management API, see the *Orbix Management IDLdoc*.

---

### Rules for MBean declarations

The following rules apply for C++ MBeans:

- Each MBean object must implement the declaration defined for it in a C++ header file (in this example, `hello_mbean.h`).
- The following two operations must be declared and implemented:
  - ◆ `get_mgmt_attribute()`
  - ◆ `set_mgmt_attribute()`

(although their implementation may be empty). These are the only two operations for getting and setting all MBean attributes. The name of the attribute is passed as a parameter, and the operation determines whether to get or set the attribute.

- The `invoke_method()` operation must also be declared and implemented (although its implementation may be empty).

You must declare all these methods in the MBean header file, and then implement them in the corresponding MBean implementation file (in this example, `hello_mbean.cxx`).

## Example MBean declaration

The header file for the `instrumented_plugin` application is `hello_mbean.h`. It includes the following Hello MBean declaration:

### Example 1: Hello MBean Declaration

```

#ifndef _HELLO_MBEAN_H_
#define _HELLO_MBEAN_H_

#include <omg/orb.hh>
#include <orbix_pdk/instrumentation.hh>
#include <orbix/corba.hh>
#include <it_dsa/string.h>
#include <it_dsa/list.h>
#include <it_ts/mutex.h>

class HelloWorldImpl;

class HelloMBean :
1   public virtual IT_Mgmt::ManagedEntity,
   public virtual IT_CORBA::RefCountedLocalObject {

   public:

       HelloMBean (
           HelloWorldImpl * orb_info,
           const char * name
       );

       virtual ~HelloMBean();

2   IT_Mgmt::ManagedEntityIdentifier managed_entity_id()
       IT_THROW_DECL((CORBA::SystemException));

3   char* entity_type() IT_THROW_DECL((CORBA::SystemException));

```

**Example 1:** *Hello MBean Declaration*

```

4  CORBA::Any* get_mgmt_attribute(const char* key)
    IT_THROW_DECL((CORBA::SystemException,
    IT_Mgmt::AttributeUnknown));

    void set_mgmt_attribute(
        const char* key, const CORBA::Any & new_value)
        IT_THROW_DECL((CORBA::SystemException,
        IT_Mgmt::AttributeUnknown, IT_Mgmt::AttributeReadOnly,
        IT_Mgmt::AttributeValueInvalid));

    CORBA::Any* invoke_method (const char* method_name,
        const IT_Mgmt::ArgumentSeq& in_parameters,
        IT_Mgmt::ArgumentSeq_out out_parameters)
        IT_THROW_DECL((CORBA::SystemException,
        IT_Mgmt::MethodUnknown, IT_Mgmt::InvocationFailed));

5  IT_Mgmt::ManagedEntityDescription get_description()
    IT_THROW_DECL((CORBA::SystemException));

    struct HelloParam
    {
        const char *name;
        const char *type;
        const char *description;
    };

    typedef IT_List<HelloParam> HelloParamList;
    .
    .
    .

```

This `hello_mbean.h` code example is described as follows:

1. The `HelloMBean` class implements the `IT_Mgmt::ManagedEntity` IDL interface. All entities that need to be managed must derive from this interface. The C++ implementation of the `IT_Mgmt::ManagedEntity` IDL interface is equivalent to a Java MBean.
2. The `IT_Mgmt::ManagedEntityIdentifier` `managed_entity_id()` operation is used to uniquely identify the managed entity.
3. The `entity_type()` operation returns a string indicating the type. This demo uses `HelloMBean`, which is the C++ classname. The naming service, for example, uses `NamingMBean`.

4. The `get_mgmt_attribute()`, `set_mgmt_attribute()`, and `invoke_method()` operations all use the `CORBA::Any` type to access managed entity attributes and operations.  
The `CORBA::Any` type enables you to specify values that can express any IDL type. For detailed information about the `CORBA::Any` type, see the *CORBA Programmer's Guide* (C++ version).
5. The `get_description()` operation returns an XML description of the managed entity. This is used to display information about the managed entity in the IONA Administrator Web Console. This is described in more detail in the next topic.

### Example private description

The `hello_mbean.h` file also includes the following privately declared information:

#### Example 2: *HelloMBean Private Declaration*

```
private:
1  struct HelloAttribute
    {
        const char * name;
        const char * type;
        const char * description;
        IT_Bool     access;
    };
    typedef IT_List<HelloAttribute> HelloAttributeList;

    struct HelloOperation
    {
        const char * name;
        const char * return_type;
        const char * description;
        HelloParamList params;
    };

    typedef IT_List<HelloOperation> HelloOperationList;

    void initialize_attributes();

    void initialize_operations();

    IT_String get_attributes_XML() const;
```

**Example 2:** *HelloMBean Private Declaration*

2

```

IT_String get_attribute_XML(HelloAttribute att) const;

IT_String get_operations_XML() const;

IT_String get_operation_XML(HelloOperation op) const;

IT_String get_param_XML(HelloParam param) const;

IT_Bool validate_create_forecast_parameters(
    const IT_Mgmt::ArgumentSeq& in_parameters)
    throw (IT_Mgmt::InvocationFailed);

void throw_wrong_num_parameters()
    throw (IT_Mgmt::InvocationFailed);

void throw_invalid_parameter(const char *param_name)
    throw (IT_Mgmt::InvocationFailed);

void throw_bad_temp_range( const char *paramName,
    CORBA::Short minVal, CORBA::Short maxVal)
    throw (IT_Mgmt::InvocationFailed);

void throw_max_must_be_greater_than_min()
    throw (IT_Mgmt::InvocationFailed);

HelloAttributeList      m_attribute_list;
HelloOperationList     m_operation_list;
IT_String               m_identity;
IT_String               m_domain;
IT_String               m_class_name;
IT_String               m_type;
IT_String               m_name;
IT_Mutex                m_mutex;

// Attribute names
const char*             m_hit_count_name;
const char*             m_children_name;
const char*             m_message_name;

// Operation names
const char*             m_create_forecast_name;

HelloWorldImpl*        m_hello;
};

```

1. This privately declared information is used to display descriptions of managed attributes and operations in the IONA Administrator Web Console. For example, the `initialize_attributes()` function uses a `HelloAttribute` structure to define a single attribute. An instance of this attribute and anything else that you declare are pushed on to a list. This list is then processed by `get_attributes_XML()` and by `get_attribute_XML()` to generate the description for display in the IONA Administrator Web Console.
2. These operations all throw `IT_Mgmt` management exceptions. You also can specify custom management exceptions. For more information, see [“Throw the managed exceptions” on page 96](#).

---

**Further information**

C++ Managed entities are similar to the JMX MBeans that are used by Java Programmers. For information about Java MBeans see:

<http://java.sun.com/products/JavaManagement/index.html>

## Step 3—Implementing your MBeans

### Overview

After defining your MBean interfaces, you must provide an MBean implementation. MBean implementation objects interact with the application they are designed to manage, enabling monitoring and control.

For example, this section shows the interaction between an MBean (`HelloMBean`) and the CORBA server implementation object (`HelloWorldImpl`). This section shows example code extracts from the MBean implementation file (`hello_mbean.cxx`). It includes the following steps:

1. “Write the MBean constructor and destructor”.
2. “Get the managed entity ID and entity type”.
3. “Get the managed attributes”.
4. “Set the managed attributes”.
5. “Invoke the managed operations”.
6. “Throw the managed exceptions”.
7. “Get the MBean description”.

### Write the MBean constructor and destructor

The `HelloMBean` constructor and destructor are shown in the following extract from `hello_mbean.cxx`:

#### Example 3: MBean Constructor and Destructor

```

1 HelloMBean::HelloMBean (
    HelloWorldImpl * hello, const char *name) : m_hello(0)
{
    assert(hello != 0);
    hello->_add_ref();
    m_hello = hello;
    m_domain = m_hello->get_domain_name();
    m_class_name = "com.iona.hello>HelloMBean";
    m_type = "HelloMBean";
    m_name = "HelloService";

```

**Example 3:** *MBean Constructor and Destructor*

```

    m_identity = "DefaultDomain";
    //m_identity = m_domain.c_str();
    m_identity += ":type=HelloMBean,name=";
    m_identity += name;
    initialize_attributes();
    initialize_operations();
}
2 HelloMBean::~HelloMBean()
{
    m_hello->_remove_ref();
}

```

This code extract is explained as follows:

1. The `HelloMBean()` constructor specifies all the key information used to identify the MBean, and display it in the IONA Administrator Web Console. For example, this includes its domain name, a Java-style class name (`com.iona.hello.HelloMBean`), and a managed entity ID. For information about registering MBeans as managed entities, see [“Creating an example MBean” on page 104](#).
2. The `HelloMBean()` destructor. For information about unregistering MBeans as managed entities, see [“Removing your MBeans” on page 105](#).

### Get the managed entity ID and entity type

The managed entity ID and type uniquely identify the managed entity. The following code extract shows how to obtain the managed entity ID and its type:

**Example 4:** *Managed Entity ID and Type*

```

1 IT_Mgmt::ManagedEntityIdentifier HelloMBean::managed_entity_id()
  IT_THROW_DECL((CORBA::SystemException))
  {
    return CORBA::string_dup(m_identity.c_str());
  }
2 char* HelloMBean::entity_type()
  IT_THROW_DECL((CORBA::SystemException))
  {
    return CORBA::string_dup(m_type.c_str());
  }

```

This code extract is explained as follows:

1. The ID returned by `managed_entity_id()` is a string that includes the domain, type, and name, at minimum. These are the keys that are looked up in the MBean by the management service. The actual values are decided by the developer.

This example uses the `DefaultDomain` for the first string (the domain). You can specify your own domain name instead. The rest of the name value pairs follow, and are separated by commas, for example:

```
"DefaultDomain:type=HelloMBean,name=HelloService"
```

**Note:** The domain name part of the managed entity ID is not related to an Orbix configuration or location domain. It is a namespace for managed entities only. For example, in a banking application your IDs might use a `BankingApp` domain.

2. The `entity_type()` operation returns a string indicating the type of the managed entity. The entity type is formatted in a dotted Java-style notation, which can be used by the IONA Administrator Web Console to display icons for an MBean. For example, this demo uses the `com.ionahello.HelloMBean` type.

## Get the managed attributes

The following code extract shows how to get managed MBean attributes:

### Example 5: Getting Managed Attributes

```

1 CORBA::Any* HelloMBean::get_mgmt_attribute(const char* key)
  IT_THROW_DECL((CORBA::SystemException,
  IT_Mgmt::AttributeUnknown))
  {
2   CORBA::Any_var retval = new CORBA::Any;
   if (strcmp(key, m_hit_count_name) == 0)
   {
       IT_Locker<IT_Mutex> lock(m_mutex);
       *retval <<= m_hello->total_hits();
       return retval._retn();
   }
3   else if (strcmp(key, m_children_name) == 0)
   {
       IT_Locker<IT_Mutex> lock(m_mutex);
       HelloWorldImpl::HelloWorldList children =
       m_hello->get_children();

```

**Example 5: Getting Managed Attributes**

```

CORBA::AnySeq children_seq(children.size());
children_seq.length(children.size());
HelloWorldImpl::HelloWorldList::iterator iter =
children.begin();

for (int i = 0; i < children.size();i++, iter++)
{
    IT_Mgmt::ManagedEntity_var mbean = (*iter)->get_mbean();
    children_seq[i] <<= mbean.in();
}
*retval <<= children_seq;
return retval._retn();
}

else if (strcmp(key, m_message_name) == 0)
{
    IT_Locker<IT_Mutex> lock(m_mutex);
    CORBA::String_var message = m_hello->get_message();
    *retval <<= message.in();
    return retval._retn();
}
else
{
    throw new IT_Mgmt::AttributeUnknown();
}
}

```

This code extract is explained as follows:

1. The `get_mgmt_attribute()` operation is the only operation used for getting all MBean attributes. The name of the attribute is passed in and the operation determines whether to get the attribute.
2. The `CORBA::Any` type enables you to specify values that can express any IDL type. For details of managed attribute types, see [“Permitted types” on page 92](#). For detailed information about the `CORBA::Any` type, see the *CORBA Programmer’s Guide, C++*.
3. This `get_mgmt_attribute()` implementation supports complex attribute types by also getting the attributes of child MBeans.

In the `instrumented_plugin` example, the `children` attribute of the `Hello` MBean gets a list of references to child MBeans.

For example, in [Figure 17 on page 79](#), the **Children** attribute and its child MBeans (**hello3** and **hello2**) are displayed in the IONA Administrator Web Console.

**Permitted types** The following basic types are permitted for managed attributes:

```
CORBA::Short
CORBA::Long
CORBA::LongLong
CORBA::Float
CORBA::Double
CORBA::Boolean
CORBA::Octet
CORBA::String,
CORBA::WString.
```

In addition, you can use `ManagedEntity` references to connect one Managed Entity and another. These will be displayed as hyperlinks on the web console. Finally, you can use `CORBA::AnySeq` to create lists of any of the permitted types already listed.

## Set the managed attributes

The following code extract shows how to set managed MBean attributes:

### Example 6: *Setting Managed Attributes*

```
1 void HelloMBean::set_mgmt_attribute(const char* key,
    const CORBA::Any & new_value
    IT_THROW_DECL((CORBA::SystemException,
    IT_Mgmt::AttributeUnknown, IT_Mgmt::AttributeReadOnly,
    IT_Mgmt::AttributeValueInvalid ))
    {
    if (strcmp(key, m_message_name) == 0)
    {
        CORBA::TypeCode_var tc(new_value.type());
        CORBA::TCKind kind = tc->kind();

        if (kind != CORBA::tk_string)
        {
            throw new IT_Mgmt::AttributeValueInvalid();
        }
        const char *new_message;
        new_value >>= new_message;
```

**Example 6: Setting Managed Attributes**

```

2      m_hello->set_message(new_message);
    }
    else if (strcmp(key, m_hit_count_name) == 0)
    {
        throw new IT_Mgmt::AttributeReadOnly();
    }
    else if (strcmp(key, m_children_name) == 0)
    {
        throw new IT_Mgmt::AttributeReadOnly();
    }
    else
    {
        throw new IT_Mgmt::AttributeUnknown();
    }
}

```

This code extract is explained as follows:

1. The `set_mgmt_attribute()` operation is the only operation used for setting all MBean attributes. The name of the attribute is passed in and the operation determines whether to set the attribute.  
The `CORBA::Any` type enables you to specify values that can express any IDL type. For detailed information about the `CORBA::Any` type, see the *CORBA Programmer's Guide, C++*.
2. The `set_message()` function enables you to set the text message for the hello greeting that is returned by the Hello object. For example, [Figure 17 on page 79](#), shows an example text greeting for the **Message** attribute in the IONA Administrator Web Console.

**Invoke the managed operations**

The following code extract shows how to invoke MBean operations:

**Example 7: Invoke Operations**

```

1 CORBA::Any* HelloMBean::invoke_method(const char* method_name,
    const IT_Mgmt::ArgumentSeq& in_parameters,
    IT_Mgmt::ArgumentSeq_out out_parameters)
    IT_THROW_DECL((CORBA::SystemException, IT_Mgmt::MethodUnknown
    IT_Mgmt::InvocationFailed))
    {
    CORBA::Any_var retval = new CORBA::Any;
    if (strcmp(method_name, m_create_forecast_name) == 0)
    {
        IT_Locker<IT_Mutex> lock(m_mutex);

        out_parameters = new IT_Mgmt::ArgumentSeq(0);
        out_parameters->length(0);

        CORBA::String_var forecast;
        CORBA::Short min_temp, max_temp;
        const char *prospect;

        if (in_parameters.length() != 3)
        {
            throw_wrong_num_parameters();
        }

2 validate_create_forecast_parameters(in_parameters);

        in_parameters[0].value >>= min_temp;
        if (min_temp < COLDEST_MIN_TEMP || min_temp >
        HOTTEST_MAX_TEMP)
        {
            throw_bad_temp_range("minimumTemperature",
            COLDEST_MIN_TEMP, HOTTEST_MAX_TEMP);
        }

        in_parameters[1].value >>= max_temp;
        if (max_temp < COLDEST_MIN_TEMP || max_temp >
        HOTTEST_MAX_TEMP)
        {
            throw_bad_temp_range("maximumTemperature",
            COLDEST_MIN_TEMP, HOTTEST_MAX_TEMP);
        }
    }

```

**Example 7: Invoke Operations**

3

```

        in_parameters[2].value >>= prospect;
        if (max_temp < min_temp)
        {
            throw_max_must_be_greater_than_min();
        }

        m_hello->set_forecast_parameters(
            min_temp,
            max_temp,
            prospect
        );

        forecast = m_hello->get_forecast();
        *retval <<= forecast.in();
        return retval._retn();
    }
    else
    {
        throw new IT_Mgmt::MethodUnknown();
    }
}

```

This code extract is explained as follows:

1. The `invoke_method()` operation is the only operation used for invoking all MBean operations. The name of the operation is passed in and the `invoke_method()` operation determines whether to invoke the operation.

The `CORBA::Any` type enables you to specify values that can express any IDL type. For detailed information about the `CORBA::Any` type, see the *CORBA Programmer's Guide, C++*.

2. In this example, the `validate_create_forecast_parameters()` function checks that the weather forecast values entered are of the correct type (`short` or `string`). The rest of the code checks that the temperature values entered do not fall outside the range of the predeclared `const` values:

```

static const CORBA::Short COLDEST_MIN_TEMP = -100;
static const CORBA::Short HOTTEST_MAX_TEMP = 150;

```

3. The `set_forecast_parameters()` and `get_forecast()` functions enable you to create and invoke your own weather forecast. [Figure 17 on page 79](#), shows example parameter values for the **CreateForecast** operation in the IONA Administrator Web Console. This operation takes the following parameters:
  - ◆ `min_temp` (short)
  - ◆ `max_temp` (short)
  - ◆ `prospect` (string)

### Throw the managed exceptions

Before throwing management exceptions, you must first declare them in your MBean implementation file, for example:

```
static const char *BAD_TEMP_RANGE_EX =
    "com.iona.demo.pdk.instrumentedplugin.BadTempRange";
static const char *MAX_MUST_BE_GREATER_THAN_MIN_EX =
    "com.iona.demo.pdk.instrumentedplugin.MaxMustBeGreaterThanMin";
static const char *INVALID_PARAM_EX_PARAM_NAME = "paramName";
static const char *BAD_TEMP_RANGE_EX_PARAM_NAME = "paramName";
static const char *BAD_TEMP_RANGE_EX_MIN_VAL = "minVal";
static const char *BAD_TEMP_RANGE_EX_MAX_VAL = "maxVal";
```

The following code shows two example functions that are used to throw management exceptions:

#### Example 8: Throwing Management Exceptions

```
void HelloMBean::throw_bad_temp_range(
    const char *paramName,
    CORBA::Short minVal,
    CORBA::Short maxVal) throw (IT_Mgmt::InvocationFailed)
{
    IT_Mgmt::InvocationFailed ex;
    IT_Mgmt::InvocationError err;
    IT_Mgmt::PropertySeq_var properties = new
        IT_Mgmt::PropertySeq(3);
    properties->length(3);
    properties[0].name = BAD_TEMP_RANGE_EX_PARAM_NAME;
    properties[0].value <<= paramName;
    properties[1].name = BAD_TEMP_RANGE_EX_MIN_VAL;
    properties[1].value <<= minVal;
    properties[2].name = BAD_TEMP_RANGE_EX_MAX_VAL;
    properties[2].value <<= maxVal;
```

**Example 8:** *Throwing Management Exceptions*

```

err.id = (const char *) BAD_TEMP_RANGE_EX;
err.error_params = properties;
ex.error_details = err;

    throw IT_Mgmt::InvocationFailed(ex);
}

void HelloMBean::throw_max_must_be_greater_than_min()
    throw (IT_Mgmt::InvocationFailed)
{
    IT_Mgmt::InvocationFailed ex;
    IT_Mgmt::InvocationError err;

    err.id = (const char *) MAX_MUST_BE_GREATER_THAN_MIN_EX;
    ex.error_details = err;

    throw IT_Mgmt::InvocationFailed(ex);
}

```

**Custom exception messages** You can specify custom messages using the `exception-ia.properties` file, which is located in the following off-host directory:

```
install-dir/conf/domains/default-domain/resources
```

For example, the entry in this file for the `throw_bad_temp_range()` operation is as follows:

```
com.iona.demo.pdk.instrumentedplugin.BadTempRange=Bad
temperature range entered for parameter %paramName%. The
temperature must be between %minVal% and %maxVal%.
```



**Figure 19:** *Instrumented Plugin Custom Exception*

**Get the MBean description**

The following code shows how the MBean descriptions are obtained for display in the IONA Administrator Web Console:

**Example 9: Getting the MBean Description**

```

1 IT_Mgmt::ManagedEntityDescription HelloMBean::get_description()
  IT_THROW_DECL((CORBA::SystemException))
  {
    IT_String xml_str =
      "<?xml version=\"1.0\"?>"
      "<?rum_dtd version=\"1.0\" ?>"
      "<mbean>"
        "<class_name>";
        xml_str += m_class_name;
        xml_str +=
          "</class_name>"
          "<domain>";
          xml_str += m_domain;
          xml_str +=
            "</domain>"
            "<type>";
            xml_str += m_type;
            xml_str +=
              "</type>"
              "<identity>";
              xml_str += m_identity;
              xml_str +=
                "</identity>"
                "<description>";
                xml_str += "Hello Service";
                xml_str +=
                  "</description>";
                xml_str += get_attributes_XML();
                xml_str += get_operations_XML();
                xml_str += "</mbean>";

    return CORBA::string_dup(xml_str.c_str());
  }
2 void HelloMBean::initialize_attributes()
  {
    m_hit_count_name = "TotalHelloCalls";

    HelloAttribute total_hits =
    {

```

**Example 9:** *Getting the MBean Description*

```

        m_hit_count_name, "long",
        "The total number of successful calls to
        HelloWorld::request_number() "
        "since the Hello Service started",
        IT_FALSE
    };
    m_attribute_list.push_back(total_hits);

    m_children_name = "Children";

    HelloAttribute children =
    {
        m_children_name, "list",
        "The list of children of this MBean",
        IT_FALSE
    };

    m_attribute_list.push_back(children);

    m_message_name = "Message";

    HelloAttribute message =
    {
        m_message_name, "string",
        "Message that this object emits",
        IT_TRUE
    };

    m_attribute_list.push_back(message);
}
3 IT_String HelloMBean::get_attributes_XML() const
{
    IT_String xml_str("");

    HelloAttributeList::const_iterator iter =
        m_attribute_list.begin();
    while (iter != m_attribute_list.end())
    {
        xml_str += get_attribute_XML(*iter);
        iter++;
    }
    return xml_str;
}

```

**Example 9:** *Getting the MBean Description*

```

IT_String HelloMBean::get_attribute_XML
(HelloAttribute att) const
{
    IT_String xml_str =
    "<managed_attribute>"
        "<name>";
        xml_str += att.name;
        xml_str +=
        "</name>"
        "<type>";
        xml_str += att.type;
        xml_str +=
        "</type>"
        "<description>";
        xml_str += att.description;
        xml_str +=
        "</description>"
        "<property>"
        "<name>Access</name>"
        "<value>";
        xml_str += att.access ? "ReadWrite" : "Read";
        xml_str +=
        "</value>"
        "</property>"
        "</managed_attribute>";
    return xml_str;
}
.
.
.

```

This code extract is explained as follows:

1. The `get_description()` operation returns an XML string description of the managed entity, which is displayed by IONA Administrator. This description normally includes the managed entity's attributes and operations (with parameters and return types). This string must be exact in order to parse correctly. This code example includes the `class_name`, `domain` and `type` attributes in the description.
2. The rest of the functions are local to this particular implementation, and are not defined in IDL. The `initialize_attributes()` function uses a locally-defined structure (`HelloAttribute`) to define a single

attribute. `HelloAttribute` is declared in `hello_mbean.h`. An instance of this attribute and anything else that you declare are pushed on to a list, including child MBeans.

3. The `HelloAttributeList` is then processed by `get_attributes_XML()` and by `get_attribute_XML()` to generate the description for display in the IONA Administrator Web Console.

There are similar functions for displaying the operations and their parameters in the console (`get_operation_XML()`, `get_operations_XML()` and `get_param_XML()`).

For full details of the `mbean.dtd` file used to display the XML string description, see [Appendix A on page 111](#).

## Step 4—Initializing the Management Plugin

### Overview

After defining and implementing your MBeans, you should then initialize the the management plugin in your server implementation. The `instrumented_plugin` example adds the additional instrumentation code to the existing server implementation file.

Alternatively, for a larger application, you could create a separate instrumentation class, which is called by your server implementation.

### Example management initialization

The following code extract is also from the server implementation file (`hello_world_impl.cxx`). It shows how the management plugin is initialized in the `instrumented_plugin` application:

#### Example 10: Management initialization

```

void HelloWorldImpl::initialize_management() IT_THROW_DECL(())
{
1   if (!m_config->get_string("domain_name", m_domain_name))
    {
        cerr << "Couldn't get domain_name from config" << endl;
        m_domain_name = "<unknown domain>";
    }
    try
    {
        CORBA::Object_var obj;
        CORBA::String_var process_object_name;

2   obj = m_orb->resolve_initial_references("IT_Instrumentation");
        IT_Mgmt::Instrumentation_var instrument;
        instrument = IT_Mgmt::Instrumentation::_narrow(obj);

        if (CORBA::is_nil(instrument))
        {
            throw IT_String("Instrumentation reference is nil");
        }
        .
        .
        .

```

This `hello_world_impl.cxx` code extract is described as follows:

1. The `get_string()` operation obtains the managed entity domain name. For more information, see [“Get the managed entity ID and entity type” on page 89](#).
2. Like any other Orbix service, the management service must be initialized by your server implementation. The `resolve_initial_references()` operation obtains a reference to the management instrumentation interface, `IT_Instrumentation`. This is then narrowed to the `IT_Mgmt::Instrumentation` type.  
A managed entity must be registered with the instrumentation interface to be displayed in the IONA Administrator Web Console.

## Step 5—Creating your MBeans

### Overview

After initializing the management service plugin, you can then create your MBeans in your server implementation. This section includes the following:

- [“Creating an example MBean”](#).
- [“Removing your MBeans”](#).

### Creating an example MBean

The following is a continuation of the example in the last section, taken from the server implementation file. It shows how the MBean is created for the `instrumented_plugin` application:

#### Example 11: *Creating an MBean*

```
void HelloWorldImpl::initialize_management()
    IT_THROW_DECL(())
{
    .
    .
    .
    // Create and register the Hello MBean
    IT_Mgmt::ManagedEntity_var hello_mbean_ref;

1   hello_mbean_ref = m_hello_mbean_servant =
        new HelloMBean(this,m_name.in());
    instrument->new_entity(hello_mbean_ref);

    if (m_is_parent)
    {

2       //Get the Process ObjectName
        process_object_name = instrument->get_process_object_name();

3       // Add the MBean as a child of the Process MBean.
        instrument->create_parent_child_relationship(
            process_object_name,
            hello_mbean_ref->managed_entity_id()
        );
    }
    .
    .
    .
}
```

This `hello_world_impl.cxx` code extract is described as follows:

1. You must create the MBean using the `new()` method, and register it as a managed entity using the `new_entity()` operation.
2. This gets the string that specifies the process object. The process object is displayed as the parent of the `HelloMBean` in the navigation tree of the IONA Administrator Web Console. For more information about the process name, see [“The Process MBean” on page 106](#).
3. This creates a parent-child relationship between your MBean and the Process MBean. The `create_parent_child_relationship()` operation takes two parameters:
  - ◆ The parent MBean name (in this case, the Process MBean).
  - ◆ The child MBean name (in this case, a reference to the `HelloMBean`).

Creating a parent-child relationship adds the MBean to the navigation tree of the console.

---

## Removing your MBeans

You might wish to remove an MBean in response to an administrator’s interaction with the system. For example, in a banking application, if an account is deleted from the bank, it would be appropriate to remove the corresponding MBean for the account.

Removing an MBean unregisters it as a managed entity. This ensures that the MBean will no longer be displayed as part of the managed application.

To remove an MBean, use the `remove_entity()` operation. When the account’s MBean has been removed, it is no longer displayed in the IONA Administrator Web Console. The `remove_entity()` operation takes the managed entity name as a parameter.

The `instrumented_plugin` application is a simple example that does not remove any MBeans.

---

## Further information

For full details of the Orbix Management API, see the *Orbix Management IDLdoc*.

## Step 6—Connecting MBeans Together


### Overview

Applications are displayed in the IONA Administrator Web Console as a series of related or connected MBeans, which can be monitored by administrators. This section explains how to connect your application MBeans together.

### The Process MBean

The management service plugin creates a *Process MBean* when it is first loaded. A Process MBean is the default starting point in the console for navigation within a managed process. In the `instrumented_plugin` application, the `HelloMBean` is a child of the Process MBean.

[Figure 20](#) shows the Process MBean for the `instrumented_plugin` application. The Process MBean has associated default attributes, displayed in the details pane (for example, process type, time running, hostname, and so on).

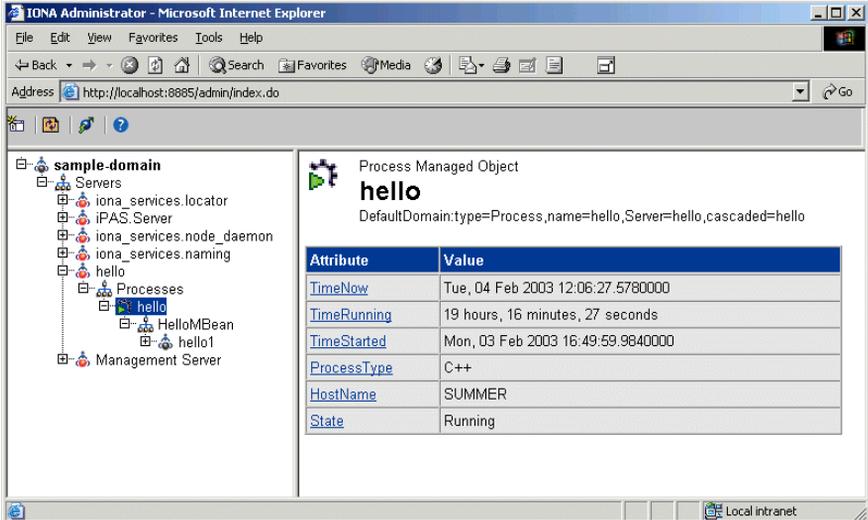

The screenshot shows the IONA Administrator Web Console in a Microsoft Internet Explorer browser window. The address bar shows `http://localhost:8885/admin/index.do`. The main content area is divided into two panes. The left pane shows a tree view of the managed domain structure, with the following nodes expanded:

- sample-domain
  - Servers
    - iona\_services.locator
    - IPAS.Server
    - iona\_services.node\_daemon
    - iona\_services.naming
    - hello
      - Processes
        - hello
          - HelloMBean
            - hello1
    - Management Server

The right pane displays the details for the selected 'hello' Process Managed Object. The details include the object name 'hello' and its default domain: `DefaultDomain:type=Process,name=hello,Server=hello,cascaded=hello`. Below this is a table of attributes and their values:

| Attribute                   | Value                              |
|-----------------------------|------------------------------------|
| <a href="#">TimeNow</a>     | Tue, 04 Feb 2003 12:06:27 -5780000 |
| <a href="#">TimeRunning</a> | 19 hours, 16 minutes, 27 seconds   |
| <a href="#">TimeStarted</a> | Mon, 03 Feb 2003 16:49:59.9840000  |
| <a href="#">ProcessType</a> | C++                                |
| <a href="#">HostName</a>    | SUMMER                             |
| <a href="#">State</a>       | Running                            |

Figure 20: Instrumented Plugin Process MBean

## Creating parent-child relationships

Use the `create_parent_child_relationship()` operation to connect two MBeans together. This enables MBeans to appear as children of others in the navigation tree on the left of the console.

“[Creating an example MBean](#)” on page 104 shows how to use this operation to add your application MBean as a child of the Process MBean. In [Example 12](#), the `add_child()` function shows how to add further child MBeans created by your application to the navigation tree.

### Example 12: Creating Child MBeans

```

void HelloWorldImpl::add_child(HelloWorldImpl *child)
    IT_THROW_DECL(())
{
    // Lock mutex
    try
    {
1      CORBA::Object_var obj;
        obj = m_orb->resolve_initial_references("IT_Instrumentation");
        IT_Mgmt::Instrumentation_var instrument;
        instrument = IT_Mgmt::Instrumentation::_narrow(obj);

        if (CORBA::is_nil(instrument))
        {
            throw IT_String("Instrumentation reference is nil");
        }

        CORBA::String_var my_name, child_name;

2      my_name = m_hello_mbean_servant->managed_entity_id();

        IT_Mgmt::ManagedEntity_var childMBean = child->get_mbean();

        child_name = childMBean->managed_entity_id();

3      instrument->create_parent_child_relationship(
            my_name.in(),
            child_name.in()
        );
    }
}

```

**Example 12: Creating Child MBeans**

```

4   m_children.push_front(child);
    }
    catch(IT_Mgmt::ManagementBindFailed& ex)
    {
        cerr << "Management bind failed: " << ex << endl;
        m_is_managed = IT_FALSE;
    }
    .
    .
    .
    }

```

This `hello_world_impl.cxx` code extract is described as follows:

1. The `resolve_initial_references()` operation obtains a reference to the management instrumentation interface, `IT_Instrumentation`. This is then narrowed to the `IT_Mgmt::Instrumentation` type. All managed entities must be registered with the instrumentation interface to be displayed in the IONA Administrator Web Console.
2. The `managed_entity_id()` operation is used to uniquely identify the managed entity.
3. The `create_parent_child_relationship()` operation takes the parent MBean and the child MBean as parameters.
4. This adds the child MBean to the list of MBeans. These steps add the child MBean to the tree for display in console. For example, [Figure 21](#) shows a child MBean for the `instrumented_plugin` application (in this example, **hello3**).

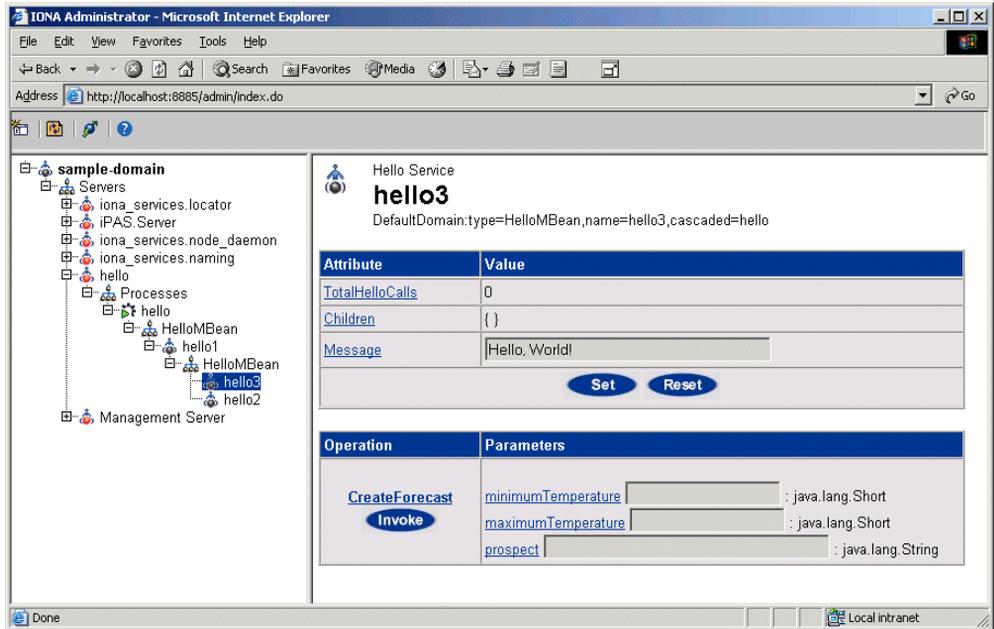


Figure 21: Instrumented Plugin Child MBean



# MBean Document Type Definition

*This appendix lists the contents of the mbean.dtd file used to generate the display of the IONA Administrator Web Console.*

---

## **In this appendix**

This appendix contains the following section:

|   |
|---|
| <a href="#">The MBean Document Type Definition File</a> |
|---|

|                          |
|--------------------------|
| <a href="#">page 112</a> |
|--------------------------|

---

# The MBean Document Type Definition File

---

## Overview

The `mbean.dtd` file used to generate the XML used in the display of the IONA Administrator Web Console. For example, the `get_description()` operation returns an XML string description of the managed entity, which is then displayed by the console. This description normally includes the managed entity's attributes and operations (with parameters and return types).

---

## `mbean.dtd` contents

The contents of the `mbean.dtd` file is as follows:

```
<!-- MBean is the top level element -->
<!ELEMENT mbean (class_name, domain, identity, agent_id,
  description, notification_listener*, notification_filter*,
  notification_broadcaster*, constructor*, operation*,
  managed_attribute*)>

<!-- IMMEDIATE MBEAN PROPERTIES -->
<!ELEMENT class_name (#PCDATA)>
<!ELEMENT domain (#PCDATA)>
<!ELEMENT identity (#PCDATA)>
<!ELEMENT agent_id (#PCDATA)>

<!-- COMMON ELEMENT TYPES -->

<!-- type = void | byte| char | double | float | long | longlong
  | short | boolean | string | list | ref | UNSUPPORTED -->
<!ELEMENT type (#PCDATA)>

<!ELEMENT name (#PCDATA)>
<!ELEMENT description (#PCDATA)>
<!ELEMENT param (name, type, description)>

<!-- NOTIFICATION details - note no recipients are shown for the
  broadcasts -->
<!ELEMENT notification_listener EMPTY>
<!ELEMENT notification_filter EMPTY>
<!ELEMENT notification_broadcaster EMPTY>
```

```
<!-- CONSTRUCTORS -->
<!ELEMENT constructor (name, description, param*)>

<!-- OPERATIONS -->
<!ELEMENT operation (name, type, description, param*)>

<!-- MANAGED ATTRIBUTES -->
<!ELEMENT managed_attribute (name, type, description,
    property*)>

<!-- PROPERTIES -->
<!-- name = Access -->
<!ELEMENT property (name, value)>
<!-- value = ReadWrite | ReadOnly | INACCESSIBLE -->
<!ELEMENT value (#PCDATA)>
```



# Glossary

## **Administration**

All aspects of installing, configuring, deploying, monitoring, and managing a system.

## **Application Server**

A software platform that provides the services and infrastructure required to develop and deploy middle-tier applications. Middle-tier applications perform the business logic necessary to provide web clients with access to enterprise information systems. In a multi-tier architecture, an application server sits beside a web server or between a web server and enterprise information systems. Application servers provide the middleware for enterprise systems.

## **CORBA**

Common Object Request Broker Architecture. An open standard that enables objects to communicate with one another regardless of what programming language they are written in, or what operating system they run on.

## **Configuration**

A specific arrangement of system elements and settings.

## **Controlling**

The process of modifying the behavior of running software components, without stopping them.

## **Details Pane**

The display pane on the right hand side of the IONA Administrator Web Console user interface.

## **Deployment**

The process of distributing a configuration or system element into an environment.

## **Domain**

An abstract grouping of managed server processes and hosts within a physical location. Processes within a domain share the same configuration and distributed application infrastructure. A domain is equivalent to an Orbix configuration domain.

### **EJB**

Enterprise Java Beans. Sun Microsystems' architecture for the development and deployment of reusable, object-oriented, middle-tier components. EJBs can be either session beans or entity beans. EJB enables the implementation of a multi-tier, distributed object architecture. See

<http://java.sun.com/products/ejb/>

### **Event**

An occurrence of interest, which is emitted from a managed entity.

### **Host**

Generic term used to describe a computer, which runs parts of a distributed application.

### **Installation**

The placement of software on a computer. Installation does not include Configuration unless a default configuration is supplied.

### **Instrumentation**

Code instructions that monitor specific components in a system (for example, instructions that output logging information on screen.) When an application contains instrumentation code, it can be managed using a management tool such as IONA Administrator.

### **Invocation**

A request issued on an already active software component.

### **JRE**

Java Runtime Environment. A subset of the Java Development Kit required to run Java programs. The JRE consists of the Java Virtual Machine, the Java platform core classes and supporting files. It does not include the compiler or debugger.

### **JMX**

Java Management Extensions. Sun's standard for distributed management solutions. JMX provides tools for building distributed, Web-based solutions for managing devices, applications and service-driven networks.

### **Managed Application**

An abstract description of a distributed application, which does not rely on the physical layout of its components.

### **Managed Entity**

A generic manageable component (C++ or Java). Managed entities include managed domains, servers, containers, modules, and beans.

A managed entity acts as a handle to your application object, and enables the object to be managed. The terms managed entity and MBean are used interchangeably in this document.

### **Managed Server**

A set of replicated managed processes. A managed process is a physical process which contains an ORB and which has loaded the management plugin. The managed server can be an EJB application server, CORBA server, or any other instrumented server that can be managed by IONA Administrator.

### **Managed Process.**

A physical process which contains an ORB and which has loaded the management plugin.

### **Management**

To direct or control the use of a system or component. Sometimes used in a more general way meaning the same as Administration.

### **MBean**

A JMX term used to describe a generic manageable object.

An MBean acts as a handle to your application object, and enables the object to be managed. The terms managed entity and MBean are used interchangeably in this document.

### **Monitoring**

Observing characteristics of running instances of software components. Monitoring does not change a system.

### **Navigation Tree**

The tree on the left hand side of the IONA Administrator Web Console.

### **Node**

A node represents a host machine on which the product is installed. The management service and managed servers are deployed on nodes.

### **ORB**

CORBA Object Request Broker. This is the key component in the CORBA architecture model. It acts as the middleware between clients and servers.

### **Process**

This is the operating system execution environment in which system and application programs execute. A Java Virtual Machine (JVM) is a special type of process that runs Java programs. A process that is not running Java programs is referred to as a standard or C++ process.

### **Process MBean**

This is the first-level MBean that is exposed for management of an application. It is the starting point for navigation through an application in the IONA Administrator Web Console

### **Resource**

This represents shared data or services provided by a server. Examples of J2EE resources include JDBC, JNDI, JMS, JCA, and so on. Examples of CORBA resources include naming service, implementation repository, trading service, notification service, etc.

### **Server**

This is a collection of one or more processes on the same or different nodes that execute the same programs. The processes in a server are tightly coupled, and provide equivalent service. This means that the calling client does not care which process ends up servicing the request.

### **Runtime Administration, Runtime Management**

Encompasses the running, monitoring, controlling and stopping of software components.

## **SNMP**

Simple Network Management Protocol. The Internet standard protocol developed to manage nodes on an IP network. It can be used to manage and monitor all sorts of devices (for example, computers, routers, and hubs)

## **Starting**

The process of activating an instance of a deployed software component.

## **Stopping**

The process of deactivating a running instance of a software component.

## **Web Services**

Web services are XML-based information exchange systems that use the Internet for direct application-to-application interaction. These systems can include programs, objects, messages, or documents.

## **Web Services Container**

A Web services container provides an environment for deploying and running Web services. A Web services container is typically deployed and runs in an application server.

## **XML**

Extensible Markup Language. XML is a simpler but restricted form of Standard General Markup Language (SGML). The markup describes the meaning of the text. XML enables the separation of content from data. XML was created so that richly structured documents could be used over the web. See

<http://www.w3.org/XML/>



# Index

## A

architecture  
  IONA Administrator Web Console 21

## B

binding:server\_binding\_list 60

## C

C++ configuration 47  
CFR 66  
client-id 48  
collector 55  
CORBA, definition 115  
create\_parent\_child\_relationship() operation 105  
custom exception messages 97

## D

domains  
  definition 17, 115  
  introduction 66  
dynamic MBeans 70

## E

EJB, definition 116  
EMS, definition 44  
Enterprise Management Systems 44  
entity\_type() operation 84

## G

get\_attributes\_XML() function 87  
get\_description() operation 85  
get\_forecast() function 96  
get\_mgmt\_attribute() operation 82  
get\_string() operation 103

## H

HelloAttributeList 101  
HelloMBean() constructor 89  
HelloMBean() destructor 89  
HelloMBean class 84  
HelloWorldImpl object 88

## I

iBank example 80  
IIOP 17, 66  
initialize\_attributes() function 87  
instrumentation, definition 19, 116  
instrumented\_plugin example 78  
Interoperable Object Reference 59  
invoke\_method() operation 83  
IONA Administrator  
  Management Service 66  
  overview 66  
  Web Console 66  
IONA Administrator Web Console  
  components 17  
  overview 20  
IONA Configuration Explorer 66  
iona\_services.management process 66  
IOR 59  
IT\_Mgmt::Instrumentation type 103  
it\_response\_time\_logger 46, 47, 49, 60

## J

JMX  
  definition 116  
  introduction 68

## L

life cycle message formats 54  
logging collector 55  
logging message formats 51

## M

Managed Entity 72  
managed\_entity\_id() operation 84  
management instrumentation  
  programming steps 69  
management service  
  overview 17  
management service, overview 66  
mbean.dtd file 101  
MBean monitor 45  
MBeans

- dynamic 70
- implementing 88
- introduction 68
- Process MBean 106, 118
- standard 70
- unregistering 74
- MBeans, definition 117
- MBean server
  - introduction 68

**N**

- new\_entity() operation 105

**O**

- ORB, definition 118
- Orbit Configuration Authority 67
- orb\_plugins 46

**P**

- performance logging 44
- performance logging collector 55
- permitted attribute types, C++ 92
- plugins:it\_response\_time\_collector:client-id 48
- plugins:it\_response\_time\_collector:filename 47
- plugins:it\_response\_time\_collector:period 47
- plugins:it\_response\_time\_collector:server-id 48
- plugins:it\_response\_time\_collector:syslog\_appID 47
- plugins:it\_response\_time\_collector:system\_logging\_enabled 47
- plugins:remote\_log\_receiver:iioip
  - addr\_list 59
- plugins:remote\_log\_receiver:ior\_filename 59
- plugins:remote\_log\_receiver:log\_filename 59
- plugins:remote\_log\_receiver:prerequisite\_plugins 59
- Process MBean 106, 118
- programming steps
  - for management instrumentation 69

**R**

- remote logger daemon 55
- remote logging 55
- remote\_log\_receiver 59
- remove\_entity() operation 105
- Request counter 45
- resolve\_initial\_references() operation 103
- Response time collector 45
- Response time logger 45

- running 54

**S**

- server\_binding\_list 46
- server-id 48
- server ID, configuring 48
- servlet\_binding\_list 46
- set\_forecast\_parameters() function 96
- set\_message() function 93
- set\_mgmt\_attribute() operation 82
- shutting\_down 54
- SNMP, definition 119
- standard MBeans 70
- starting\_up 54

**V**

- validate\_create\_forecast\_parameters() function 95

**W**

- Web Services, definition 119

**X**

- XML, definition 119

**Z**

- z/OS 55