

# SecureLogin CE 24.3 (v9.2) Citrix and Terminal Services Guide

April, 2024

## **Legal Notice**

### **Copyright 2009 - 2024 Open Text.**

The only warranties for products and services of Open Text and its affiliates and licensors ("Open Text") are as may be set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Open Text shall not be liable for technical or editorial errors or omissions contained herein. The information contained herein is subject to change without notice.

For additional information, such as certification-related notices and trademarks, see <https://www.microfocus.com/en-us/> (<https://www.microfocus.com/en-us/>).

---

# Contents

<b>About This Guide</b>	<b>7</b>
<b>1 Introduction</b>	<b>9</b>
1.1 Prerequisites for Installing SecureLogin on a Citrix and Terminal Server	9
1.1.1 Internet Explorer Enhanced Security Configuration	9
1.1.2 Disabling Internet Explorer Enhanced Security	10
1.2 Installation Overview	10
1.3 Overview of Citrix Application Deployment	10
1.3.1 Application Modes	10
1.3.2 Deploying in Corporate Directory Environments	11
1.3.3 Deploying the Full Citrix Desktop	11
1.3.4 Deploying Published Applications	11
1.3.5 Deploying Citrix Desktop and Published Applications	11
1.4 SecureLogin Attributes	12
<b>2 Installing SecureLogin on a Citrix Server</b>	<b>13</b>
<b>3 Deploying Citrix Applications</b>	<b>15</b>
3.1 Launching an Application in a Citrix Environment	15
3.2 Configuring Citrix Load Balancing	15
3.2.1 Creating a New Load Evaluator	15
3.2.2 Loading New Load Evaluators to the Citrix Server	16
3.2.3 Deploying Existing Citrix Published Applications	18
<b>4 Using Connectors</b>	<b>19</b>
4.1 Enabling an Application with Connectors	19
4.2 Deleting Connectors	20
<b>5 Setting Terminal Services</b>	<b>21</b>
5.1 Integrating Microsoft Terminal Server and Citrix	21
5.2 Credential Provider Pass-Through	22
5.2.1 What Happens when Credential Provider Is Working	22
5.3 Integrating with Citrix Components	23
5.3.1 Credential Provider Authentication	23
5.3.2 Program Neighborhood	24
5.3.3 Using Desktop Shortcuts to Published Applications	24
5.3.4 Handling Password Changes	25
5.4 Virtual Channel	25
5.4.1 Virtual Channel Components	25
5.4.2 Auto-Detecting the Client Protocol	26
5.5 Requirements for Terminal Services	26
5.5.1 Server Requirements	27
5.5.2 Workstation Requirements	27

5.6	Setting Up the Server	27
5.6.1	Setting the Credential Provider	27
5.6.2	Configuring OnDemand	28
5.7	Setting Up Workstations	29
5.7.1	Novell Client (without the NMAS Client)	29
5.7.2	Novell Client (with the NMAS Client)	29
5.7.3	Microsoft Workstation with No Novell Client Installed	30
5.8	Installing the Virtual Channel Driver	30
5.8.1	Workstations with the Citrix Client (ICA)	30
5.8.2	Workstations with the Terminal Server Client (RDP)	31
5.9	Installing the Terminal Server Web Client	31
5.10	Integrating with Citrix Published Applications	31
5.10.1	Modifying the Command Line	31
5.10.2	Using SLLauncher Syntax	32
5.11	Registry Settings	33
5.11.1	Auto-Detecting the Client Protocol	33
5.11.2	Servers with a Novell Client	33
5.11.3	Localized Machine	33
5.11.4	Third-Party GINA	33
5.12	Files Installed	34
5.12.1	Citrix Client	34
5.12.2	Terminal Services Client	35
5.12.3	CitrixServer	35
5.12.4	Microsoft Terminal Server	35
5.12.5	Citrix Server	35

## 6 Upgrading 37

6.1	Issues with Upgrading	37
6.1.1	Changes With Encryption	37
6.1.2	Issues In Reading Old Data	37
6.1.3	Upgrading the Data Store	38
6.1.4	Prompting for a Passphrase During an Upgrade	38
6.1.5	About the New Protection Method	38
6.1.6	Adding the New Encryption Algorithm	39
6.2	Deployment Options	39
6.2.1	Installation Options in a Citrix Environment	39
6.2.2	Deploying Existing Citrix Published Applications	39
6.2.3	Using the Installation Options	40
6.2.4	Deploying in Citrix Desktop Mode	40
6.2.5	Deploying Existing Citrix Published Applications	40
6.2.6	Citrix Published Applications and the Application Definition Wizard	41
6.3	Upgrading from Earlier Versions to SecureLogin 8.0	41
6.3.1	Restriction on Upgrades	41
6.3.2	Upgrading SecureLogin	41
6.4	Phased Upgrade	42
6.5	Hot Desk and Mobile Users	42
6.6	Stopping Tree Walking	42
6.7	Changing the Directory Database Version	43
6.8	Deployment Prerequisites	43
6.9	Developing a Migration Plan	44
6.9.1	Example of a Migration Plan	44





# About This Guide

This guide provides information about installing, deploying, and upgrading SecureLogin on a Citrix Server.

## Additional Documentation

For the latest version of this guide and other SecureLogin documentation resources, see the [SecureLogin Documentation](#) and keep up to date on patches and versions of both SecureLogin and the host operating system.

## Contact Information

We want to hear your comments and suggestions about this book and the other documentation included with this product. You can use the [comment on this topic](#) link at the bottom of each page of the online documentation.

For specific product issues, contact Micro Focus Customer Care at <https://www.microfocus.com/support-and-services/>.





# 1 Introduction

SecureLogin integrates with Citrix and terminal services to deliver a more efficient, simple, and reliable single sign-on (SSO) solution. SecureLogin is Citrix Ready certified and you can see all the compatible Citrix applications at [Citrix Ready Marketplace \(https://citrixready.citrix.com/micro-focus/securelogin.html\)](https://citrixready.citrix.com/micro-focus/securelogin.html).

This document provides instructions for directory servers and terminal servers (the Citrix server environment). For example, configuring a Microsoft Active Directory server for user provisioning and management with the applications deployed by using a Citrix server.

You must configure the Citrix and terminal server and user workstations prior to installing SecureLogin. The SecureLogin installation package now detects Citrix and terminal server files and installs the required supporting files automatically. In scenarios where Citrix or terminal services are deployed after your SecureLogin implementation, you must redeploy the SecureLogin installation package to install the required SecureLogin components.

## In this Chapter

- ♦ [Prerequisites for Installing SecureLogin on a Citrix and Terminal Server](#)
- ♦ [Installation Overview](#)
- ♦ [Overview of Citrix Application Deployment](#)
- ♦ [SecureLogin Attributes](#)

## 1.1 Prerequisites for Installing SecureLogin on a Citrix and Terminal Server

- ☐ Extend the relevant enterprise or corporate directory schema with the SecureLogin SSO attributes.
- ☐ Ensure that you have administrator-level access to the Citrix or Terminal Services server.
- ☐ If SSO is required for Java applications, install Java 1.7 or 1.8 on the server and workstations.
- ☐ Uninstall all previous versions of the SecureLogin.

### 1.1.1 Internet Explorer Enhanced Security Configuration

This information applies to the configuration of a server in a Microsoft Windows Server 2003 operating system environment.

By default, the Microsoft Windows Server 2003 installs Internet Explorer Enhanced Security Configuration designed to decrease the exposure of enterprise servers to the potential attacks that might occur through Web content and application scripts. Because of this, some Web sites might not display or perform as expected with the installed SecureLogin.

For more information about enhanced security, see the [Microsoft Support Website](http://support.microsoft.com/kb/81514/en-us). (<http://support.microsoft.com/kb/81514/en-us>)

## 1.1.2 Disabling Internet Explorer Enhanced Security

If you are experiencing difficulty accessing single sign-on enabled web pages from a Windows Server 2003 server, do one of the following:

- ♦ In Internet Explorer, select **Tools > Internet Options > Advanced tab** and under the **Browsing heading**, select **Enable third-party web browser extensions**.

-or-

- ♦ Use the Windows **Add/Remove Windows Components** on the Control Panel to disable Microsoft's Internet Enhanced Security Configuration.

## 1.2 Installation Overview

The following are the high-level tasks of the Citrix and terminal services server installation.

The documentation for installing SecureLogin on a Citrix or Microsoft Terminal Services covers the default installation assuming that SecureLogin is installed on both, the server and on the workstation.

In the default install, `Slinas.dll` is installed on the server. However, if SecureLogin is not installed on the workstations, `Slinac.dll` must be installed on the server.

- 1 Uninstall previous versions of SecureLogin before upgrading to SecureLogin 8.5 or later.
- 2 Extend the corporate directory schema.
- 3 Install SecureLogin on the Citrix and terminal services server.

## 1.3 Overview of Citrix Application Deployment

- ♦ [Section 1.3.1, "Application Modes," on page 10](#)
- ♦ [Section 1.3.2, "Deploying in Corporate Directory Environments," on page 11](#)
- ♦ [Section 1.3.3, "Deploying the Full Citrix Desktop," on page 11](#)
- ♦ [Section 1.3.4, "Deploying Published Applications," on page 11](#)
- ♦ [Section 1.3.5, "Deploying Citrix Desktop and Published Applications," on page 11](#)

### 1.3.1 Application Modes

You can deploy the Citrix application in the following modes:

Deployment	Description
<a href="#">Deploying the Full Citrix Desktop</a>	In this mode of deployment, only the Citrix client runs on the desktop and all other applications run on the Citrix server.
<a href="#">Deploying Published Applications</a>	In this mode of deployment, a combination of applications runs on the desktop, and some are published by using the Citrix server.

Deployment	Description
<a href="#">Deploying Citrix Desktop and Published Applications</a>	Use this mode of deployment to run a full Citrix desktop, or a combination of Citrix published applications and applications on the workstation.

## 1.3.2 Deploying in Corporate Directory Environments

In a corporate directory environments, the SecureLogin data is stored on the directory. This is done by extending the directory schema to include SecureLogin attributes. For information about extending the directory schema for your directory, refer to the [SecureLogin CE 24.3 \(v9.2\) Installation Guide](#).

---

**NOTE:** If you have installed SecureLogin 8.5.x, or a later version, the required SecureLogin attributes are already installed.

---

## 1.3.3 Deploying the Full Citrix Desktop

Deploying the full Citrix Desktop requires SecureLogin schema extensions on the network directory server and client installation on the Citrix server.

The data of users operating the SecureLogin and using the Citrix server remotely is stored on the Citrix server and the network directory.

## 1.3.4 Deploying Published Applications

Deploying published applications requires SecureLogin schema extensions on the network directory server with the client installation on the Citrix server and the user workstation.

SecureLogin executes from the workstation to log in to applications published on the Citrix server. SecureLogin user data must be stored on the user's workstation for GINA to GINA pass-through unless SecureLogin is needed for single sign-on applications that are running on that workstation.

---

**NOTE:** The SecureLogin Application Definition Wizard cannot detect Citrix published applications. You must run the application on your workstation to create an application definition using the wizard.

---

## 1.3.5 Deploying Citrix Desktop and Published Applications

Citrix Desktop and published applications require:

- ♦ SecureLogin schema extension on the network directory server.
- ♦ A Citrix server and a user workstation.

SecureLogin executes from the workstation or the Citrix server, depending on the mode selected by the user. The SecureLogin user data is stored on the directory server, the Citrix server, and the user workstation.

## 1.4 SecureLogin Attributes

Extending the directory schema adds the following SecureLogin attributes:

- ♦ Protocom-SSO-Auth-Data
- ♦ Protocom-SSO-Entries
- ♦ Protocom-SSO-SecurityPrefs
- ♦ Protocom-SSO-Profile
- ♦ Protocom-SSO-Entries-Checksum
- ♦ Protocom-SSO-Security-Prefs-Checksum

- 1 Log in to the server as administrator.
- 2 Insert the SecureLogin product installer package. The main menu is displayed.
- 3 Click **Install/Upgrade** and follow the on-screen instructions for your installation type.
- 4 Double-click the `ndsschema.exe` file in the `SecureLogin\Tools\Schema\NDS` folder of the installer package. The SecureLogin - Schema extension dialog box is displayed.
- 5 Extend the schema.

## 2 Installing SecureLogin on a Citrix Server

After you have completed extending the schema to the required directory objects, install SecureLogin SSO applications on the Citrix server.

For information about extending the schema, see Extending the eDirectory Schema “[Configuring and Deploying in an eDirectory Environment](#)” in the *SecureLogin CE 24.3 (v9.2) Installation Guide*.

SecureLogin can be installed, configured, and features added and removed by using Microsoft Windows installer command line options and parameters specified in the command line or specified through a bath file. For information about SecureLogin installation, see the *SecureLogin CE 24.3 (v9.2) Installation Guide*.

SecureLogin requires Microsoft Windows installer 3.0 or later, which ships with Windows XP Service Pack 2 (SP2) and is also available as a redistributable system component for Microsoft Windows Server 2003 (32-bit systems only). You can download this from the [Microsoft Download Website](http://www.microsoft.com/downloads/Search.aspx?displaylang=en) (<http://www.microsoft.com/downloads/Search.aspx?displaylang=en>).

---

**NOTE:** The procedures for installing on administrator workstations and user workstations are the same.

The following procedure uses the Microsoft Windows Vista 64-bit installer.

---

- 1 Log in to the workstation as an administrator.
- 2 Run the `NetIQSecureLogin.exe` file.
- 3 Accept the license agreement.
- 4 Click **Next**.
- 5 Select **Citrix** and **Citrix Password Agent**.
- 6 Click **Next** to confirm the selection and install SecureLogin.



# 3 Deploying Citrix Applications

## In this Chapter

- ♦ [Launching an Application in a Citrix Environment](#)
- ♦ [Configuring Citrix Load Balancing](#)

## 3.1 Launching an Application in a Citrix Environment

SecureLogin integrates with Citrix and terminal services and simplifies the method in which single sign-on support is provided for published applications. SecureLogin can be launched without manually publishing the Citrix applications. SecureLogin can be started or shut down after a user has terminated all the applications, which delivers a far more efficient, simple, and reliable single sign-on solution for any Citrix and terminal services environment.


## 3.2 Configuring Citrix Load Balancing

A single sign-on operation implemented for memory optimization might result in client connection dropouts. However, this does not have any adverse impact on your Citrix server, and you can resolve this by configuring Citrix Load Evaluators to increase the number of allowed page faults.


- ♦ [Section 3.2.1, “Creating a New Load Evaluator,” on page 15](#)
- ♦ [Section 3.2.2, “Loading New Load Evaluators to the Citrix Server,” on page 16](#)
- ♦ [Section 3.2.3, “Deploying Existing Citrix Published Applications,” on page 18](#)

### 3.2.1 Creating a New Load Evaluator

- 1 Start the Citrix management console, then select **Load Evaluators**.

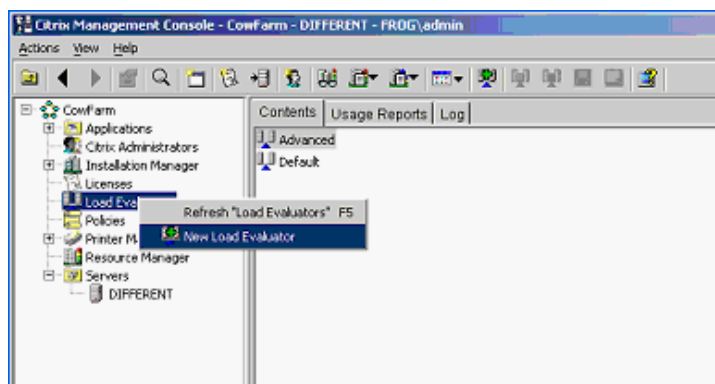

- 2 Right-click and select **New Load Evaluator**. The New Evaluator dialog box is displayed.

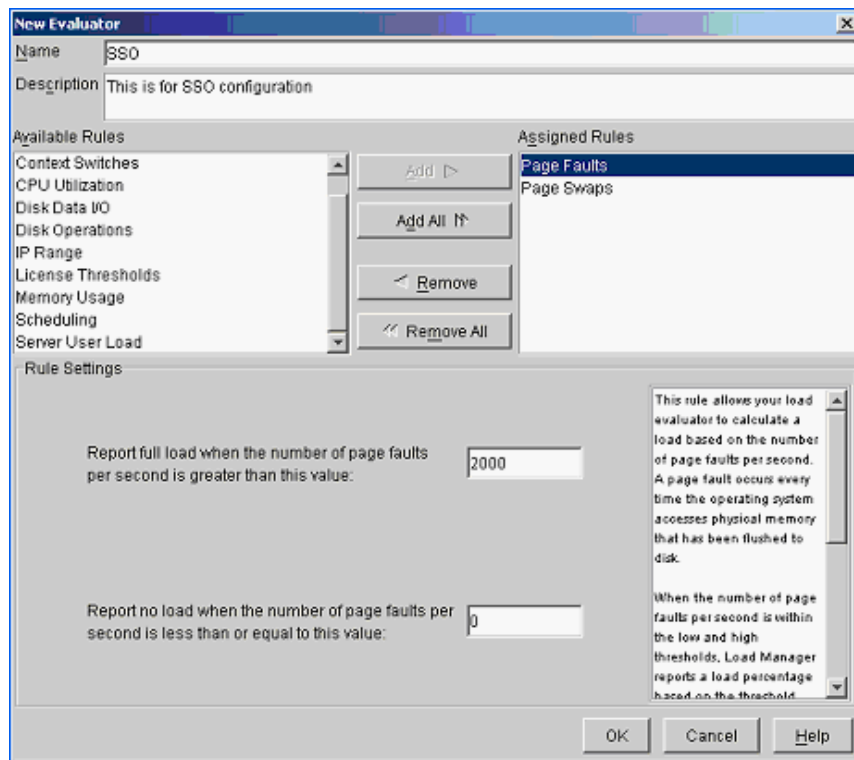

3 Specify a name for the **Load Evaluator**, and a description for the new evaluator.

4 From the **Available Rules** list, select **Page Faults** and **Page Swaps**, then click **Add**.

5 From the **Assigned Rules** lists, select **Page Faults**.

The page default settings are configured in the rule setting section, which is displayed in the bottom half of the New Evaluator dialog box.

6 Specify a value in the **Report full load** field when the number of page faults per second is greater than this value field.

7 Specify a value in the **Report full load** field when the number of page faults per second if less than or equal to this value field.

8 From the **Assigned Rules** list, select **Page Swaps** to display page swap settings in the rule settings section.

9 Specify a value in the **Report full load** field when the number of page swaps per second is greater than this value field.

10 Specify a value in the **Report full load** field when the number of page swaps per second is less than or equal to this value field.


11 Click **OK**.

The required Load Evaluators are configured and are loaded to the Citrix server on which SecureLogin is installed.


## 3.2.2 Loading New Load Evaluators to the Citrix Server

1 From the Citrix management console, select **Servers > Citrix servers**.



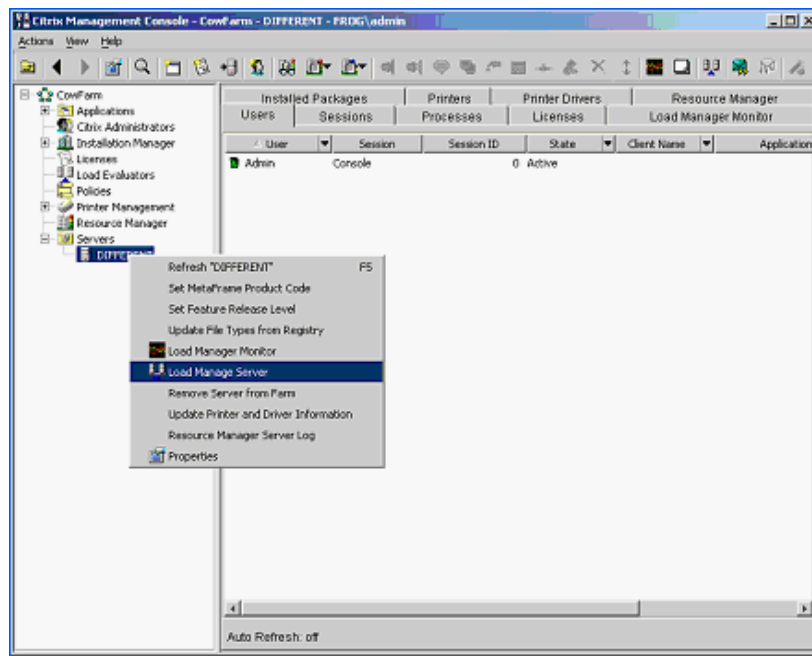

- 2 Right-click the relevant Citrix server name, then select **Load Manage Server**. The Load Manage Server - <server name> is displayed.

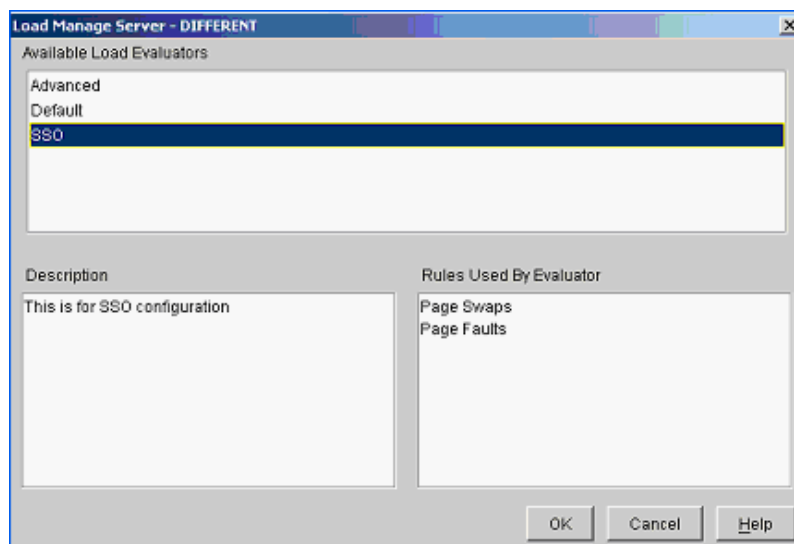

- 3 From the **Available Load Evaluators** list box, select **Configured Load Evaluators**. Click **OK**. The new Load Evaluators are loaded to the Citrix server.

### 3.2.3 Deploying Existing Citrix Published Applications

If you are upgrading from a previous version of SecureLogin, you do not need to change the `SLLauncher.exe` shortcuts previously created for published Citrix applications. SecureLogin modifies the existing `SLLauncher.exe` automatically so that `SLLauncher.exe` is a shell that runs any command line passed to it.

The SecureLogin installer now automatically detects that the installation is on a Citrix server and prompts you to verify the new Citrix components to be installed.

---

**IMPORTANT:** After installing SecureLogin, if you have both published application and published desktop open, the changes made to SecureLogin on the desktop is not reflected in the published application session until SecureLogin is restarted.

---

# 4 Using Connectors

SecureLogin enables applications for single sign-on by using connectors. A connector is a program that recognizes the specific application and runs the application definition. Connectors are created for most commonly used applications.

You can build new connectors for proprietary applications or modify existing connectors.

## In this Chapter

- ♦ [Enabling an Application with Connectors](#)
- ♦ [Deleting Connectors](#)

## 4.1 Enabling an Application with Connectors

The SecureLogin Yahoo e-mail connector demonstrates how SecureLogin enables a standard application for single sign-on. If you do not have a Yahoo account, you can use a similar application, for example, Hotmail.

To use the Yahoo connector:

- 1 Start your web browser.
- 2 Go to [www.yahoo.com](http://www.yahoo.com).
- 3 Click **Mail**.

SecureLogin detects the Yahoo login screen, executes the Yahoo connector, and displays a dialog box confirming that a password field is detected.

- 4 Click **Yes**.
- 5 In the Enter Your User ID Information dialog box, specify your Yahoo username and password, then click **OK**. SecureLogin automatically enters your login credentials, activates the **Sign In** button, and logs you in to your Yahoo account.

If the username or password entered is incorrect, a dialog box displays, requesting that you enter the correct credentials. Enter the correct credentials, then click **OK**.

SecureLogin saves your credentials and uses them to automatically log you in to your account every time you want to access the Yahoo account.

- 6 (Optional) Test logging in and out of Yahoo. Click **Sign Out**, then click **Yes**.


6a Click **Sign Out**.

6b Click **Yes**.

SecureLogin enters your credentials to log you back in to your Yahoo e-mail account.

If the login is not successful, delete the SecureLogin connector by using **Manage Logins**. Repeat the [Step 1](#) through [Step 5](#).

## 4.2 Deleting Connectors

- 1 Double-click the SecureLogin  icon in the notification area.
- 2 Select **Applications**.
- 3 Select Yahoo.com, then click **Delete**.
- 4 Click **OK**.

# 5 Setting Terminal Services

## In this Chapter

- ♦ Integrating Microsoft Terminal Server and Citrix
- ♦ Credential Provider Pass-Through
- ♦ Integrating with Citrix Components
- ♦ Virtual Channel
- ♦ Requirements for Terminal Services
- ♦ Setting Up the Server
- ♦ Setting Up Workstations
- ♦ Installing the Virtual Channel Driver
- ♦ Installing the Terminal Server Web Client
- ♦ Integrating with Citrix Published Applications
- ♦ Registry Settings
- ♦ Files Installed

## 5.1 Integrating Microsoft Terminal Server and Citrix

SecureLogin can simplify authentication to numerous configurations of Microsoft Terminal Server and Citrix MetaFrame. Integration of SecureLogin and the terminal server consists of the following components. Not all are necessarily required, depending on your implementation.


- ♦ The client login extension (`slinac.dll`) applied to a workstation with the Novell Client, with or without the Novell Modular Authentication Services (NMAS) client.
- ♦ The server login extension (`slinas.dll`) applied to a terminal server with the Novell Client.  
The component provides the server-side link to the client GINA.
- ♦ The server GINA replacement (`sl_tsgina.dll`) applied to a terminal server without the Novell client.  
This component provides the server-side link to the client GINA stub.
- ♦ The SecureLogin Virtual Channel Driver (`vdslsson.dll` or `tsslssso.dll`).  
This component provides the conduit for secure communications between the client and server extensions.
- ♦ Published Application integration (`SLLauncher.exe`) applied to a Citrix server.  
This component provides proper initialization and termination of the SecureLogin components (`slbroker.exe` and `proto.exe`) running on the server.

## 5.2 Credential Provider Pass-Through

With the SecureLogin Citrix components installed, SecureLogin provides a seamless pass-through of GINA credentials/Credential Provider from the client to the server. The GINA credential/Credential Provider pass-through operates anytime that the terminal server presents a GINA/ Credential Provider login panel. If the credentials that the user used to log in to the client match the credentials of the terminal server, the credentials are automatically passed for the user. If the credentials do not match, SecureLogin captures the error and presents a new login panel for the user to complete. SecureLogin detects which GINA/ Credential Provider is running on the Citrix server and requests the appropriate information.

For example, if SecureLogin detects that the terminal server has the Novell Client installed, SecureLogin presents the following dialog box:

*Figure 5-1 NDS Credentials*

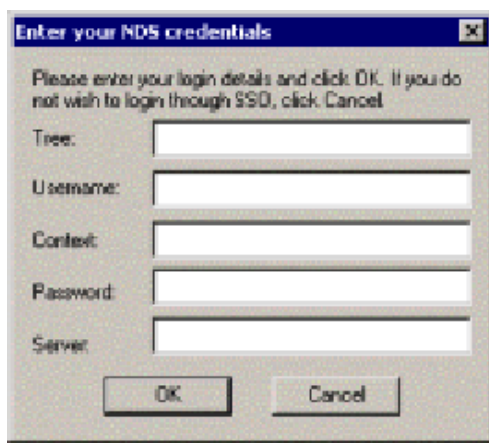

After the user completes the dialog box, SecureLogin saves the information as a hidden application (platform) within the SecureLogin datastore directory (and local cache if applicable). The next time the user accesses the terminal server, the credentials are retrieved from the hidden application and seamlessly passed to the terminal server.

Several components are utilized by SecureLogin to perform the GINA/ Credential Provider pass-through authentication. Depending on the configuration, different modules are required. The credentials are retrieved from the hidden application and seamlessly passed to the terminal server.

### 5.2.1 What Happens when Credential Provider Is Working

1. A user boots the workstation.
2. The user is prompted to enter the credentials to log in.  
The SecureLogin client interface module captures the login credentials, encrypts, and stores the details in the workstation registry.
3. SecureLogin loads on the workstation and reads the encrypted credentials from the registry and stores the values to the `?sys` variable.
4. The user initiates the a Citrix session through the ICA Client, RDP Client, or the SLLauncher.
5. SecureLogin detects the Citrix session and establishes the virtual channel.

6. When the login is required within the Citrix session, SecureLogin client interface modules on the server query the virtual channel for the pass-through credentials.
7. After the credentials are obtained through the virtual channel, SecureLogin passes the credentials to the configured authentication service.

## 5.3 Integrating with Citrix Components


Citrix provides several ways to access a Citrix server or published application. How you access the server determines how SecureLogin handles the authentication to the server. Although different methods are used depending on how you access the server, SecureLogin can manage all forms of authentication.

- [Section 5.3.1, “Credential Provider Authentication,” on page 23](#)
- [Section 5.3.2, “Program Neighborhood,” on page 24](#)
- [Section 5.3.3, “Using Desktop Shortcuts to Published Applications,” on page 24](#)
- [Section 5.3.4, “Handling Password Changes,” on page 25](#)

### 5.3.1 Credential Provider Authentication

When the Citrix server requests a Windows GINA/Credential Provider authentication, the Citrix Seamless Session Interface provides the credentials by using the hidden application (platform) method. An example of this type of authentication occurs when you connect to a Citrix server through Program Neighborhood's Custom ICA Connection interface:

**Figure 5-2** Custom ICA Connections

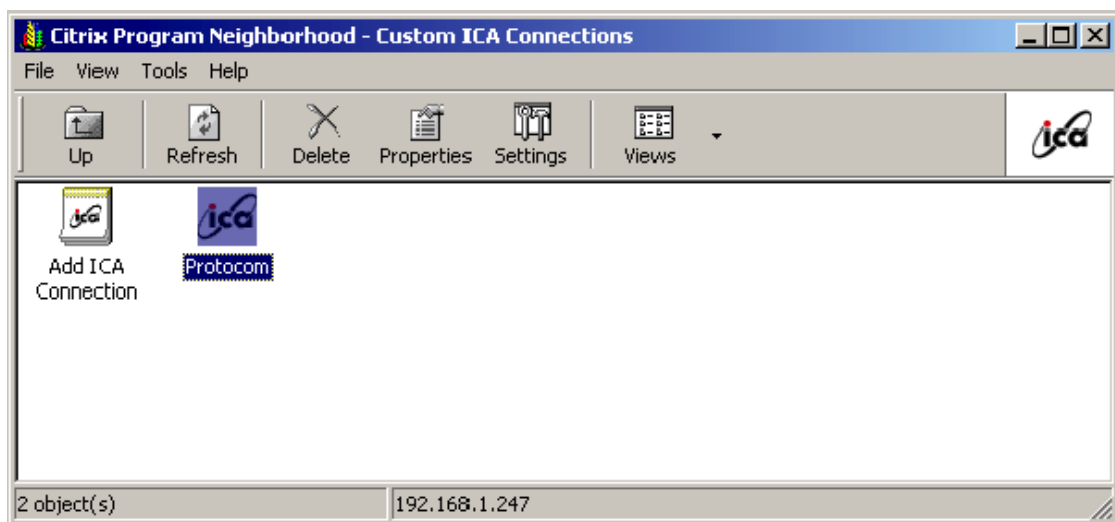

Another example of this type of authentication occurs when you export a published application to an .ica file and distribute it to your workstations. This type of authentication is enabled by installing the Credential Provider components. The authentication is not disabled even if SecureLogin is not currently active.

## 5.3.2 Program Neighborhood

When a user accesses a Citrix farm by using Program Neighborhood, Program Neighborhood uses `wfcrun32.exe` and presents a Program Neighborhood authentication dialog box:

*Figure 5-3 Program Neighborhood Authentication*



Program Neighborhood then collects the credentials and sends them to a Citrix server in the farm. The Citrix Seamless Session Interface does not handle this authentication request. However, a script can handle the `wfcrun32.exe` file just as it can handle any other Windows application that is requesting authentication. The SecureLogin Wizard automatically creates a script that enables single sign-on to Program Neighborhood. You should modify this script to allow for error handling, such as a bad username, domain, or password.

## 5.3.3 Using Desktop Shortcuts to Published Applications

If the Citrix farm is configured to push out shortcuts to the user's desktops, the shortcut actually calls an executable, `pn.exe` (for example, `C:\Program Files\Citrix\ICA Client\pn.exe`). Authentication to `pn.exe` is handled by using a script, just like using a script for `wfcrun32.exe` or any other Windows application.

The SecureLogin Wizard automatically creates a script that enables single sign-on to `pn.exe`. Be sure to include error handling in case the user enters the wrong information into the dialog box.



## 5.3.4 Handling Password Changes

The Citrix Seamless Session Interface currently does not detect if users change their domains or NDS or eDirectory passwords through a Citrix connection. If a user changes one of these passwords through a Citrix connection, the interface detects the failed seamless authentication the next time that the user connects to the Citrix server. The interface then once again prompts the user for credentials.

When the user enters the correct (new) password, the interface saves that new password in place of the previous password in the hidden application within the datastore (and the local file cache if applicable).

## 5.4 Virtual Channel

A virtual channel is a session-oriented and bidirectional error-free transmission connection that application layer code can use to exchange custom data packets between a terminal server and a terminal client.

SecureLogin employs this technology to allow users to use single sign-on to various Published Application or Remote Desktop logins.

- ♦ [Section 5.4.1, “Virtual Channel Components,” on page 25](#)
- ♦ [Section 5.4.2, “Auto-Detecting the Client Protocol,” on page 26](#)

### 5.4.1 Virtual Channel Components

SecureLogin Terminal Server single sign-on (SSO) has three major components:

**Table 5-1** *The Virtual Channel Components*

Component	Description
Client login extension	Collects users' login credentials for single sign-on.
Virtual Channel Driver (VCD)	The center of SecureLogin Terminal Server single sign-on. The VCD is the liaison between the server login extension and single sign-on to perform all terminal session single sign-on processes.
Server login extension	Requests users' login credentials from the VCD and initiates the login process. After authentication, the login extension returns credentials to the VCD to update the single sign-on.

SecureLogin uses the following processes:

1. A user enters a username and password, a domain (optional), an eDirectory context, and an eDirectory tree. This information is encrypted and stored in the registry.
2. SecureLogin `slbroker.exe` consumes the registry information and destroys the data in the registry. Login credentials are saved under a generic and hidden platform name.

3. When the user starts the Citrix ICA client or a published application through a `.ica` file, the SecureLogin VCD is loaded. This driver receives the domain or preferred tree name of the server. To retrieve the username, password, domain, eDirectory context, and tree, the driver then reads the platform name from `slbroker.exe`.

If the platform does not exist, the VCD reverts to the generic platform name.

If the generic platform name does not match the requested platform (tree or domain), the VCD displays a dialog box to prompt the user to enter NDS, eDirectory, or NT credentials. The credentials that are expected depend on whether the request is coming from a server with a Novell Client or from an NT/2000 server. The collected credentials are then sent to the server for verification.

When the user enters and accepts the credential dialog box, a hidden application is created for the next authentication request.

If the user chooses to cancel entering credentials, the server login box appears as usual.

---

**NOTE:** SecureLogin does not currently handle the actual password change process. Therefore, SecureLogin does not send back the new password when it is changed on the Citrix server. However, when the password stored in `slbroker.exe` is invalid because of a recent password change done on the Citrix Server, the user is prompted to enter login credentials again. After the new password is verified, it is then sent back to the VCD to update `slbroker.exe`.

---

4. After a successful authentication, the server login extension always sends the user's login credentials back to the workstation. If an application does not exist, this procedure creates a new application in `slbroker.exe`. If the password has recently been changed and the application already exists, this procedure updates the new password to `slbroker.exe`.

## 5.4.2 Auto-Detecting the Client Protocol

The server detects whether the ICA protocol is present or not. If the ICA protocol is present, the server loads it. If the client is trying to establish a session by using the RDP protocol, the server loads the RDP protocol and the session begins. After the server is installed, it automatically responds to the RDP or ICA protocol.

By default, the Auto Detection feature is on.

Windows NT 4.0 Terminal Server Edition (RDP 4.0) does not support the virtual channel operation. If the client tries to establish a session by using the RDP protocol, Windows NT 4.0 Terminal Server Edition won't respond to the client.

## 5.5 Requirements for Terminal Services

The section contains the following information:

- ♦ [Section 5.5.1, "Server Requirements," on page 27](#)
- ♦ [Section 5.5.2, "Workstation Requirements," on page 27](#)

## 5.5.1 Server Requirements

- ♦ Windows 2008 and 2003 Server Edition or the Windows 2000 Server family with Terminal Service enabled.
- ♦ One of the following Citrix servers installed (optional):
  - ♦ XenApp 5.0 or later
  - ♦ Citrix client 11.0 or later
- ♦ (Optional) Novell Client 4.9 SP5 or later

## 5.5.2 Workstation Requirements

- ♦ Novell Client 4.91 SP5 or later
- ♦ One of the following:
  - ♦ Win32 ICA Client Version 11.0 or later
  - ♦ Terminal Server Client that supports RDP 5.0 (for example, the version that shipped with Windows 2000 Advanced Server)

## 5.6 Setting Up the Server

In SecureLogin 8.8 and later, the server setup to support terminal server integration is automated. You are not required to do any manual setup.

In the process, the following files are copied to the Windows system directory, (for example, C:\Windows\System32):

- ♦ `srv\sl_vc.dll`
- ♦ `srv\sl_rdp.dll`
- ♦ `srv\sl_ica.dll`
- ♦ `srv\slaa_sso.dll`

If SecureLogin is installed on the server in LDAP mode, then `srv\slaa_sso.dll` is also copied to the Windows system directory.

### 5.6.1 Setting the Credential Provider

If you are using SecureLogin 8.8 or later, the installation automatically installs the necessary binaries and configures the server. In such case, you can skip the following steps.

#### Servers with the Novell Client

- 1 Set up a Novell login extension.  
Copy `srv\nw\slinas.dll` to the Windows system directory, (for example, C:\Windows\System32).
- 2 Register the login extension.

In the `srv\nw` directory, double-click `Register NTLoginExt.reg`.

- 3 Follow the on-screen instructions to finish the registration.

## Servers without the Novell Client

- 1 Replace the credential provider server.  
Copy `srv\ms\sl_tsgina.dll` to the Windows system directory (for example, `C:\Windows\System32`).
- 2 Register the login extension.  
In the `srv\nw` directory, double-click `winlogon_server.orgTLoginExt.reg`.
- 3 Follow the on-screen instructions to finish the registration.
- 4 Reboot the server.

## 5.6.2 Configuring OnDemand

If you have set up a Microsoft Terminal Server with Novell ZENworks® OnDemand Services installed, you don't need to install any new components for SecureLogin. OnDemand relies on the DeFrame ICA or RDP plug-ins as the client. No workstation components are necessary. When a user authenticates to the Citrix session, SecureLogin launches.

If you use the SecretStore option with OnDemand Dynamic User Creation, make the following changes to the `EnableUserProfileDirectory` value in the `HKEY_LOCAL_MACHINE\SOFTWARE\NOVELL\NICI` registry key:

Value	Type	Description
<code>EnableUserProfileDirectory</code>	DWORD	NICI user files are created in the Application Data\Novell\NICI directory in the user's profile directory

The NICI installation program does not create `EnableUserProfileDirectory`. Therefore, this value is disabled.

**NOTE:** If the user directory is enabled, NICI does not set the Access Control Lists (ACL) on this directory. NICI relies on the existing security properties (ACLs, inheritance, and ownership) of the user's profile directory.

To configure a DeFrame application object to launch Internet Explorer, when Internet Explorer is using the ICA protocol:

- 1 In ConsoleOne, right-click the Application object.
- 2 Select **DeFrame**, then click **Application Setup**.
- 3 Add `SLLauncher.exe`.  
Enclose `path\applicationname` in quotation marks (for example, "`C:\Program Files\NetIQ\SecureLogin\SLLauncher.exe`" "`c:\Program Files\Internet Explorer\iexplore.exe`").
- 4 Install the SecureLogin client at the Citrix/DeFrame server.

## 5.7 Setting Up Workstations

---

**NOTE:** If you are using SecureLogin 8.8 or later, the installation automatically installs the necessary binaries and configures the workstation. If this is the case, you can skip the steps in this section.

---

The following procedures outline the steps necessary to set up your workstations to support the Citrix integration. Based on your client workstation environment, determine which set of steps to follow.

You must match the appropriate files from the installation source to your environment. Otherwise, the extensions do not function properly. If you later install or uninstall the Novell Client or NMAS client, you must modify the SecureLogin modules to match.

Your SecureLogin terminal server components must match the version of SecureLogin you are using. When you upgrade to a new version of SecureLogin, you must also upgrade the integration components.

Your client configuration does not need to match your server configuration. For example, you can use a client that has the Novell Client installed and connect to a terminal server that does not have the Novell Client installed (or vice-versa).

- [Section 5.7.1, “Novell Client \(without the NMAS Client\),” on page 29](#)
- [Section 5.7.2, “Novell Client \(with the NMAS Client\),” on page 29](#)
- [Section 5.7.3, “Microsoft Workstation with No Novell Client Installed,” on page 30](#)

### 5.7.1 Novell Client (without the NMAS Client)

- 1 Set up the Novell login extension by copying `srv\nw\slina.dll` to the Windows system directory (for example, `C:\Windows\System32`).

- 2 Register the login extension.

If you are running Windows NT, Windows XP, or Windows 2000, double-click `Register NT LoginExt.reg`, in the `wks\nw` directory.

- 3 Follow the on-screen instructions to finish the registration.

- 4 Set up Microsoft Layer for Unicode on Windows 95/98/ME.

If you are running Windows 9x/ME, copy `redistributable\unicows.dll` to your system directory (for example, `C:\Windows\System32`).

- 5 Reboot the workstation.

### 5.7.2 Novell Client (with the NMAS Client)

- 1 Copy `slnmas.dll` from the `wks\nw` directory to the Windows system directory (for example, `C:\Windows\System32`).

The `slnmas.dll` file is not a login extension. Instead, it is called by the NMAS client. If you are using the NMAS client and `slnmas.dll`, it is not necessary to run the registry (REG) file. You will need to install the version of NMAS client that comes with current version of SecureLogin, which is `slnmas.dll` aware.

- 2 Set up Microsoft Layer for Unicode on Windows 95/98/ME.

If you are running Windows 9x/ME, copy `unicows.dll` from the `\redistributable` directory to your system directory (for example, `C:\Windows\System32`).

- 3 Follow the on-screen instructions to finish the registration.
- 4 Reboot the workstation.

### 5.7.3 Microsoft Workstation with No Novell Client Installed

- 1 Replace the workstation GINA.

Copy `sl_tsc.gina.dll` from the `wks\ms` directory to the Windows system directory (for example, `C:\Windows\System32`).

- 2 Register GINA.

Double-click `winlogon_client.reg` in the `wks\ms` directory.

- 3 Follow the on-screen instructions to finish the registration.
- 4 Reboot the workstation.

## 5.8 Installing the Virtual Channel Driver

If you are using SecureLogin 8.8 or later, the installation automatically installs the necessary binaries and configures the workstation. If this is the case, you can skip the steps in this section.

Install the Virtual Channel Driver (VCD) on workstations, and not on servers.

- ♦ [Section 5.8.1, “Workstations with the Citrix Client \(ICA\),” on page 30](#)
- ♦ [Section 5.8.2, “Workstations with the Terminal Server Client \(RDP\),” on page 31](#)

### 5.8.1 Workstations with the Citrix Client (ICA)

- 1 Install the SecureLogin Citrix ICA VCD.

Copy `vdslssoN.dll` from the `vcd\ica` directory to the ICA Client directory (for example, `C:\Program Files\Citrix\ica client`).

- 2 Register the SecureLogin Citrix ICA VCD.

Make the following changes to the module `ini` file located in the directory on the client workstation where the ICA client is installed.

- ♦ The `[ICA30]` section has a Virtual Driver line. Add the name of the virtual driver to the end of this line. For example, add  
`, SLSSO`
- ♦ At the end of the `[VirtualDriver]` section, add a driver assignment statement. For example, for the SLSSO driver, add  
`SLSSO =`

The extra spaces are for appropriate indentation. They are not required.

- 3 Create a new section, `[SLSSO]`, as follows:

```
[SLSSO]
```

```
DriverNameWin32 = VDSLSSON.DLL
```

The `vcd\ica` directory has an example `module.ini` file that you can refer to.

- 4 Set up Microsoft Layer for Unicode on Windows 95/98/ME. If you are running Windows 9x/ME, copy `unicows.dll` from the `\redistributable` directory to your ICA Client directory (for example, `C:\Program Files\Citrix\ica client`).

## 5.8.2 Workstations with the Terminal Server Client (RDP)

- 1 Install the SecureLogin Terminal Server VCD by copying `tsslso.dll` from the `\vcd\rdp` directory to the Windows system directory (for example, `C:\Windows\System32`).
- 2 Register the SecureLogin Terminal Server VCD by double-clicking `VCD\RDP\Terminal Server Driver registration` in `Client workstation.reg`.

---

**IMPORTANT:** This is a per-user setting.

---

- 3 Follow the on-screen instructions to finish the registration.

## 5.9 Installing the Terminal Server Web Client

If TSWeb Client is installed on the terminal server:

- 1 Locate `connect.asp` on the server. For example, go to `c:\inetpub\wwwroot\tsweb`.
- 2 Using Notepad, open `connect.asp`.
- 3 Add the following line before `MsTsc.Connect()`:

```
MsTsc.AdvancedSettings. PluginDlls="tsslso.dll"
```

The `vcd\rdp` directory has an example `connect.asp` file that you can refer to.

- 4 Save and close the file.

## 5.10 Integrating with Citrix Published Applications

- ♦ [Section 5.10.1, "Modifying the Command Line," on page 31](#)
- ♦ [Section 5.10.2, "Using SLLauncher Syntax," on page 32](#)

### 5.10.1 Modifying the Command Line

SLLauncher can optionally be used with any published application running on the Citrix server. This is to preserve backwards compatibility with pre-6.1 Citrix published applications that were created using the `sllauncher.exe` in the Citrix published application shortcut, and also to specify use of `sllauncher.exe` command line switches as detailed in ["Using SLLauncher Syntax" on page 32](#).

If SLLauncher is not found within the server's path environment variable, you must include the full path to SLLauncher. For example, replace the command line of the published application as follows:

Before	After
<code>C:\Program Files\NetIQ\SecureLogin\tlaunch.exe /q /auto /eWallData Rumba /pnetiqMainframe</code>	<code>SLLauncher.exe C:\Program Files\NetIQ\SecureLogin\tlaunch.exe /q /auto /e"WallData Rumba" /pnetiqMainframe</code>

## 5.10.2 Using SLLauncher Syntax

To run SLLauncher, use the following command:

```
SLLauncher [/wd] Citrix Published Application Parameters
```

**IMPORTANT:** If your executable contains a path or command line parameters that include spaces, enclose the spaces in quotes. Even if your application normally accepts the parameters with spaces, SLLauncher interprets them as separate parameters, and unexpected results might occur.

SLLauncher includes two command line parameters that control its behavior:

**Table 5-2** Command Line Parameters

Parameter	Explanation
<code>/w executable name</code>	Specifies another process to wait for before closing SecureLogin.  Example, <code>SLLauncher.exe /w rumbadsp.exe</code>  <code>C:\Program Files\NetIQ\SecureLogin\tlaunch.exe /q /auto /e"WallData Rumba" /p"netiqMainframe"</code> <code>SLLauncher.exe /w mspaint.exe run_MSPaint.CMD</code>
<code>/d</code>	Debug option. This option generates a debug log file ( <code>c:\sllauncher.log</code> ) and shows dialog boxes during the progress of SLLauncher. The switch must appear before the executable that you want to run.  Examples: <code>SLLauncher.exe /w rumbadsp.exe /d</code>  <code>/p"netiqMainframe"</code>  <code>C:\Program Files\NetIQ\SecureLogin\tlaunch.exe /q /auto /e"WallData Rumba"</code>  <code>SLLauncher.exe /w /d mspaint.exe run_MSPaint.CMD</code>



## 5.11 Registry Settings

This section describes the optional registry settings that you can make to customize SecureLogin terminal server features.

---

**NOTE:** All registry values specified are of string type (REG\_SZ)

---

- ♦ [Section 5.11.1, “Auto-Detecting the Client Protocol,” on page 33](#)
- ♦ [Section 5.11.2, “Servers with a Novell Client,” on page 33](#)
- ♦ [Section 5.11.3, “Localized Machine,” on page 33](#)
- ♦ [Section 5.11.4, “Third-Party GINA,” on page 33](#)

### 5.11.1 Auto-Detecting the Client Protocol

By default, Auto Detection is enabled. To disable Auto Detection, add the following entry to the registry:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Protocom\SecureLogin\Virtual Channel]
"AutoDetect" = "0"
```

If the protocol is not specified, the software checks for the presence of ICA. If the ICA protocol is present, the software loads the ICA protocol. Otherwise, the server uses the RDP protocol.

### 5.11.2 Servers with a Novell Client

To populate a user's common name to the NT Username field during a session login, set the following registry value on the server:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Protocom\SecureLogin\Virtual
Channel\Login\slina]
"PopulateToNT" = "1"
```

### 5.11.3 Localized Machine

To support international versions of Windows, you need to add a localized login window caption to the following registry entry:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon]
"LogonWindowCaption" = "localized caption"
```

### 5.11.4 Third-Party GINA

When using a third-party GINA (for example, the Citrix GINA), enter the GINA name as follows:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon]

"ProtocomPassThruDLL" = "Gina DLL name"
```

If the third-party GINA is using a different login window caption than Microsoft GINA/ Credential Provider does, enter it as follows in the same key:

```
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows
```

```
"LogonWindowCaption" = "Logon window caption"
```

```
NT\CurrentVersion\Winlogon\ProtocomPassThru]
```

```
"UsernameCtrlID" = "User Name field ID"
```

```
"PasswordCtrlID" = "Password Field ID"
```

```
"DomainCtrlID" = "Domain Name Ctrl ID"
```

```
"IDOK" = "OK Button ID"
```

---

**NOTE:** Define Domain Name in a combo box.

---

## 5.12 Files Installed

- [Section 5.12.1, "Citrix Client," on page 34](#)
- [Section 5.12.2, "Terminal Services Client," on page 35](#)
- [Section 5.12.3, "CitrixServer," on page 35](#)
- [Section 5.12.4, "Microsoft Terminal Server," on page 35](#)
- [Section 5.12.5, "Citrix Server," on page 35](#)

### 5.12.1 Citrix Client

Citrix Client is used to capture credentials from the Workstations and send the credentials through a virtual channel when an ICA session is established, known as GINA to GINA pass through. The CitrixClient component facilitates this GINA to GINA pass through.

- The SecureLogin GINA/Credential Provider to Novell GINA pass through is different.
- The SecureLogin GINA/ Credential Provider for Microsoft GINA/ Credential Provider component is only installed on Novell workstations with the ICA client installed.

The CitrixClient components install the following files:

- `nmascitc.dll` Citrix Virtual Channel Driver for NMAS.
- `vdslsso.dll` (SecureLogin Virtual Channel Driver for ICA Client) - This library file serves as a virtual channel to pass the captured credentials from the workstation to the Citrix Server GINA/ Credential provider.
- `module.ini` (Configuration file in the ICA client directory) - This initialization file is modified so that the ICA client can use the SecureLogin Virtual Channel driver.

## 5.12.2 Terminal Services Client

TerminalServicesClient is used to capture credentials from the Workstations and send the credentials through a virtual channel when a Terminal services session is established, known as GINA to GINA pass through. The TerminalServicesClient component facilitates this GINA to GINA pass through.

The TerminalServicesClient component installs the tsslso.dll file:

## 5.12.3 CitrixServer

The SecureLogin published application component consists of `SLLauncher.exe` used as a wrapper to launch published applications that are enabled with SecureLogin.

## 5.12.4 Microsoft Terminal Server

This Microsoft GINA/ Credential Provider component uses the SecureLogin GINA/ Credential Provider Extension (`tsgina.dll`) and a registry entry to accommodate the GINA to GINA pass through.

## 5.12.5 Citrix Server

This Novell GINA component uses the SecureLogin GINA Extension (`tsgina.dll`) and a registry entry to accommodate the GINA to GINA pass through.



# 6 Upgrading

## In this Chapter

- ♦ [Issues with Upgrading](#)
- ♦ [Deployment Options](#)
- ♦ [Upgrading from Earlier Versions to SecureLogin 8.0](#)
- ♦ [Phased Upgrade](#)
- ♦ [Hot Desk and Mobile Users](#)
- ♦ [Stopping Tree Walking](#)
- ♦ [Changing the Directory Database Version](#)
- ♦ [Deployment Prerequisites](#)
- ♦ [Developing a Migration Plan](#)

## 6.1 Issues with Upgrading

- ♦ [Section 6.1.1, “Changes With Encryption,” on page 37](#)
- ♦ [Section 6.1.2, “Issues In Reading Old Data,” on page 37](#)
- ♦ [Section 6.1.3, “Upgrading the Data Store,” on page 38](#)
- ♦ [Section 6.1.4, “Prompting for a Passphrase During an Upgrade,” on page 38](#)
- ♦ [Section 6.1.5, “About the New Protection Method,” on page 38](#)
- ♦ [Section 6.1.6, “Adding the New Encryption Algorithm,” on page 39](#)

### 6.1.1 Changes With Encryption

SecureLogin has features for single sign-on security systems. They include support for Public Key Infrastructure (PKI) encryption of single sign-on credentials and the option to use Advanced Encryption Standards (AES) for encrypting data. Both these features require changes to the SecureLogin single sign-on data format to support them.

### 6.1.2 Issues In Reading Old Data

The SecureLogin client can read data created with all the previous versions of SecureLogin. However, older versions of the product cannot read data created by SecureLogin 8.0. This means that in a mixed environment where some computers are running SecureLogin 8.0 and some other computers are running a previous versions, issues are likely to arise when users move between these versions.

This is especially a problem in Citrix Environments, or in large enterprise deployments.

The last data format occurred in SecureLogin 3.0. x and 3.5, and was related to the introduction of new scripting types and other features.

The impact of disruption of data upgrades like this is high. Hence, several new features are included in the version 6 data format that minimizes the disruption caused by data upgrades in the future.

### 6.1.3 Upgrading the Data Store

While trying to install SecureLogin 7.0, it detects that SecureLogin 3.5 data is in use and continues to work. In this mode, all 3.5 functionality continues to be available, but any version 7.0 functionality that relies on the new data is not available.

Significantly, this includes smart card support and AES encryption of data.

If you do not require functionality of the new version, then there is no great impetus to upgrade the data format. If, however you require the functionality of the new version, then complete the following tasks:

- ♦ Choose a section of the tree to upgrade.
- ♦ Ensure that all workstations used by users in that section of the trees are upgraded to the SecureLogin 8.0 client.

The next time these users log in, their data is converted to version 7 format and, the new features are available.

---

**NOTE:** When a user with SecureLogin 3.5 data first loads the version 7 client, they are prompted to answer the Passphrase question.

This does not happen if the passphrase system is disabled while the user was operating on a version 3.5 client.

---

### 6.1.4 Prompting for a Passphrase During an Upgrade

The new single sign-on security system stores additional passphrase information to facilitate seamless upgrades in the future. It now uses a more secure key derivation technique and allows the use of AES. The passphrase data stored in version 3.5 format does not contain the information required to support these new features, so, the users are prompted to reenter the passphrase answer.

### 6.1.5 About the New Protection Method

In the future, new single sign-on features might be desired. For example, the directory password and smart card might be used to protect single sign-on credentials, or a system might be available where a designated administrator can unlock a user's credentials after a password reset is done. In these cases, a new keywrapper type is needed. The keywrapper is ignored and not interpreted by the version 7 client, but the version 6 client can still access data using the old keywrappers that it does understand. This means that as long as the standard keywrappers are defined there are no upgrade issues with version 7. However, in a scenarios where the keywrappers are not defined, the existing data format upgrade process is applicable.

## 6.1.6 Adding the New Encryption Algorithm

If you need to use the encryption algorithm, you must upgrade to the version supporting that algorithm. However, there is no need for customers to upgrade if a particular algorithm is working for them.

## 6.2 Deployment Options

### In this Section

- ♦ [Installation Options in a Citrix Environment](#)
- ♦ [Deploying Existing Citrix Published Applications](#)
- ♦ [Using the Installation Options](#)
- ♦ [Deploying in Citrix Desktop Mode](#)
- ♦ [Deploying Existing Citrix Published Applications](#)
- ♦ [Citrix Published Applications and the Application Definition Wizard](#)

### 6.2.1 Installation Options in a Citrix Environment

To install the Citrix support set:

```
X_INSTALLCITRIX="Yes"
```

SecureLogin detects the type of Citrix or terminal service automatically and the following properties are set, depending on the type of the service detected.

If a Citrix client is detected: `X_ISCITRIXCLIENT="Yes"`

If a Citrix server is detected: `X_ISCITRIXSERVER="Yes"`

If a terminal client is detected: `X_ISTSCCLIENT="Yes"`

If a terminal server is detected: `X_ISTSSERVER="Yes"`

### Example of a Silent Command Line Citrix Installation

The following is an example of a successful and tested silent command line installation of SecureLogin on a Citrix client.

```
msiexec.exe /qn /norestart /i "SecureLogin.msi"  
ADDLOCAL=MAD,Citrix,CitrixClient X_INSTALLCITRIX="Yes"  
X_PLATFORM="CLIENT" X_ISCITRIXCLIENT="Yes"
```

### 6.2.2 Deploying Existing Citrix Published Applications

When upgrading from a previous version of SecureLogin to SecureLogin 8.0, you are not required to change any `SLLauncher.exe` shortcuts previously created for published Citrix applications.

When it is installed, the SecureLogin 8.0 modifies the existing `SLLauncher.exe` automatically so it becomes a shell that runs any command line passed to it.

The SecureLogin 8.0 installer now automatically detects that the installation is on a Citrix server and prompts you to verify the new Citrix components to be installed.

---

**IMPORTANT:** After the successful installation of SecureLogin, if a user has a published desktop open at the same time as a published application, any changes made to the SecureLogin data on the desktop are not reflected in the published application session until SecureLogin is restarted.

---

## 6.2.3 Using the Installation Options

**Scenario 1:** A client has a Citrix environment in an Active Directory mode. The published applications are contained in one published application set and user access to the published applications is through a Citrix Web interface. The client needs to enable single sign-on for published applications.

Install SecureLogin only on the Citrix server and not on the workstations, because the client only needs to enable single sign-on for published application when access is through the Web.

The other Securelogin component needed on the server is the published application component. Use `SLLauncher.exe` to enable single sign-on for published applications.

**Scenario 2:** A client has a Citrix environment in an Active Directory mode. Users access applications on their local workstations and also access published applications through the ICA client. Both the local application and the published applications must be enabled for single sign-on. The client also requires the users to use the same credentials to log in to both the local workstations and the Citrix server.

Install SecureLogin and the Citrix components on both the local workstation and the Citrix server to allow local applications and published applications to be enabled for single sign-on. Also, enable GINA for GINA passthrough because the user has authenticated to the directory when logging in to the workstation. When an ICA connection is established, the user's credentials that are used to authenticate to the workstation are sent through a virtual channel driver (Citrix Client option) to the Citrix server GINA.

## 6.2.4 Deploying in Citrix Desktop Mode

Deploying the full Citrix Desktop requires SecureLogin schema extensions on the network directory server and client installation on the Citrix server.

The data of users using the SecureLogin and using the Citrix server remotely is stored in the Citrix directory and the network directory.

## 6.2.5 Deploying Existing Citrix Published Applications

If you are upgrading from a previous version of SecureLogin, do not change the `SLLauncher.exe` shortcuts previously created for published Citrix applications. SecureLogin modifies the existing `SLLauncher.exe` automatically. `SLLauncher.exe` is a shell that runs any command line passed to it.

The SecureLogin installer automatically detects that the installation is on a Citrix server and prompts you to verify the new Citrix components to be installed.



---

**IMPORTANT:** After installing SecureLogin, if you have both published application and published desktop open, the changes made to SecureLogin on the desktop is not reflected in the published application session until SecureLogin is restarted.

---

## 6.2.6 Citrix Published Applications and the Application Definition Wizard

The Application Definition Wizard included in SecureLogin 7.0 and later cannot detect Citrix published applications. Run the application on your workstation to create an application definition using the wizard.

## 6.3 Upgrading from Earlier Versions to SecureLogin 8.0

To upgrade entirely to SecureLogin 8.0, you must uninstall all versions from 3.0.x to 7.0.

---

**NOTE:** If you are using the Mozilla Firefox browser, you might encounter problems when upgrading SecureLogin 6.x with Firefox 1.0.x or earlier.

Install or upgrade to SecureLogin by using Mozilla Firefox 1.5 or later. With this, the `SLoMoz.xpi` extension is automatically installed and configured.

If a user wants to continue using Mozilla Firefox 1.0.x or earlier, then the `SLoMoz.xpi` extension installed with SecureLogin must be uninstalled and the `SLoMoz.xpi` extension file of the SecureLogin installer package must be re-installed.

---

To upgrade entirely to SecureLogin 8.0, you must uninstall all versions from 3.0.x to 7.0.

### 6.3.1 Restriction on Upgrades

The only restriction that SecureLogin upgrade applies is for mobile users. When upgrading users who log in to multiple workstations, conflicts occur if the user accesses workstations that are upgraded and those that are not upgraded.

After the user logs in to a workstation that is upgraded, the user data is updated and they cannot subsequently use SecureLogin on a workstation still running the old version.

To avoid this situation and assure a smooth transition, use a migration plan. For more information about a migration plan, see [Section 6.9, “Developing a Migration Plan,” on page 44](#).

---

**NOTE:** When upgrading SecureLogin from a previous version, make sure you have the same version running on the administrative workstation. For example, if you have SecureLogin 8.0 installed on your administration workstation, you cannot administer data in the 7.0 version mode.

---

### 6.3.2 Upgrading SecureLogin

- 1 On the Windows **Start** menu, click **Control Panel > Add/Remove Programs**.
- 2 Click **SecureLogin on 7.0**, then click **Remove**.

- 3 If you are prompted to restart your workstation, click **Yes** to restart the workstation, or click **No** to restart later.  
SecureLogin is now uninstalled.
- 4 Before installing the new version of SecureLogin, log out and log in again.

## 6.4 Phased Upgrade

SecureLogin does not currently support phased upgrades for Citrix or terminal services deployments. Contact Support for assistance on deployment issues.

## 6.5 Hot Desk and Mobile Users

Hot desking is the temporary physical occupation of a workstation or, work surface by a particular employee. The work surface can either be an actual desk or a terminal link. Hot desking is regularly used in large enterprises where employees are in spread across offices or geographical locations at different times, or at out of office for a long time.

An electronic kiosk houses a computer terminal that often employs custom kiosk software designed to function flawlessly while preventing users from accessing system functions.

Hot desk users do not work from a fixed workstation and their user data is stored on the directory.

For example, in a hospital environment, staff might be stationed in a different ward for each shift, and they are able to access their applications and data from any workstation.

When these users log in to SecureLogin, their details are downloaded from the directory to the local workstation cache. All workstations accessed by Kiosk mode users must run the same version of SecureLogin. If users log in to an upgraded workstation, they cannot access their SecureLogin data on workstations running a previous version of the software.

## 6.6 Stopping Tree Walking

Checking for inherited values from higher level objects is referred to as “tree walking.” Each time the SecureLogin user cache synchronizes with the directory, SecureLogin checks for changed configuration data including preference values, password policies, preconfigured applications, and application definitions.

SecureLogin data that is not manually configured at the user object level is automatically inherited from higher-level directory objects. To ensure that higher-level object settings are not inadvertently inherited by lower-level objects, you need to set the **Stop walking here** option to **Yes** before upgrading.

You can also use this option to limit directory traffic in organizations where the network is congested or geographically dispersed. Set this function at the organizational unit or container level to stop SecureLogin from traversing the directory hierarchy past the specified level.

To set the **Stop walking here** option at the Users container:

- 1 Launch SLManager.
- 2 Select **Preferences**.
- 3 Select the **Stop walking here** option and change the value to **Yes**.
- 4 Click **apply**.

All user objects in the Users container inherits their SecureLogin configuration from the Users container level and below.

## 6.7 Changing the Directory Database Version

SecureLogin is backward compatible, so all workstations running previous versions continue to operate successfully after the directory is upgraded to the new version. Although the directory is upgraded, the SecureLogin client on the workstation continues to function as the old version of SecureLogin until you have upgraded all users to the new version and manually set the directory database version to the new version.

---

**NOTE:** The new features of SecureLogin are not available to users who have not upgraded their client versions.

---

You can configure directory database versions at the user object, container, and organizational unit levels. We recommend that you set the database version at the container and organizational unit levels. This helps you manage the database and minimize the possibility of conflicting versions.

---

**NOTE:** To utilize the SecureLogin 6.0 features such as the storage of single sign-on credentials on the user's smart card, encryption of the data store using PKI-based credentials, and the AES encryption algorithm support, the data store mode must be set to version 6.0.

---

To change the data store version:

- 1 Launch SLManager.
- 2 Select **Advanced Settings > Datastore**.
- 3 In **Select Version**, select the required version.  
You cannot select a version earlier than your current version.
- 4 Click **Apply**. When the upgrade is installed on all workstations, follow this same procedure to change the directory database version. The next time the directory server and the workstation caches are synchronized, SecureLogin operates in the new version mode.

## 6.8 Deployment Prerequisites

- ♦ Identify mobile and kiosk workstation users.
- ♦ Complete your migration plan. For more information about a migration plan, see [Section 6.9, "Developing a Migration Plan,"](#) on page 44

- ♦ Back up your SecureLogin data by exporting to an XML file. For more information about exporting an XML file, see Exporting XML Settings in the [SecureLogin CE 24.3 \(v9.2\) Installation Guide](#)
- ♦ Stop tree walking. For information about stopping tree walking, see [Stopping Tree Walking](#).
- ♦ Close SecureLogin. You cannot run the application during an upgrade.

## 6.9 Developing a Migration Plan

To ensure a smooth transition, it is recommend that you develop a migration plan. When you develop your plan, you need accurate information identifying the following:

- ♦ Version of SecureLogin:
  - ♦ Set to run on the directory.
  - ♦ Installed on the administration workstation.
  - ♦ Installed on each user workstation.
- ♦ Time frame within which you must complete the full upgrade.
- ♦ Deployment method (automated or manual?)
- ♦ Total number of users.
- ♦ Which containers/organizational units each user belongs to.
- ♦ Number of kiosk mode users.
- ♦ Number of laptop users.
- ♦ Which users, if any, you need to upgrade first.
- ♦ A list of applications required to be enabled for SecureLogin.

This information is the basis of the migration plan. You can develop and document migration plans in a variety of ways; the following is an example of one method.

### 6.9.1 Example of a Migration Plan

- ♦ [“The Organization” on page 44](#)
- ♦ [“Upgrade Order” on page 45](#)

#### The Organization

Acme is an organization with a total of 30,000 users. 16,000 are allocated a fixed workstation, 3,000 are laptop users, and 11,000 access applications in Kiosk mode. The network environment is Microsoft Active Directory, and SecureLogin version 3.5 is currently implemented. All users are managed from one administration workstation. ZENworks is used for application distribution and deployment generally occurs overnight.

Sales OU users have laptops for mobile access to the network. The Central Administration OUs contain a combination of static workstations and laptop users. Manufacturing and Purchasing OU users are mobile; workstations are accessed in Kiosk mode. Users in the remaining OUs are each allocated a workstation for their sole use.

The Java functionality provided by the new version of SecureLogin is eagerly awaited by users in the Sales group, so they have volunteered to test the upgrade. After the upgrade is successfully deployed to the Sales group, SecureLogin is deployed in stages to the rest of Acme.

## Upgrade Order

1. Directory and test user
2. Sales
3. Central Administration and Human resources
4. Account Marketing
5. Manufacturing and Purchasing
6. Administration Workstation

### Week 1

**Day 1:** Upgrade the server directory; extend the schema, and assign rights to the organizational units. Ensure that all containers and organizational units have the following:

- ♦ Directory database version 3.5.
- ♦ **Stop tree walking** preference value is set to **Yes**.

Create a test user in the Sales OU and change the setting for the user object to directory database version value **3.5**.

Test single sign-on enabling of required application

**Day 2:** On successful deployment of the upgrade for the test user, manually set the directory database version to **6.0** on the Sales OU to enable full upgrade functionality.

Deploy the SecureLogin upgrade on all Sales OU workstations/laptops. Assist Sales users with single sign-on enabling for Java applications.

Ensure that all laptop users have the SecureLogin Cache setting enabled to ensure that the cache is stored locally.

**Day 3:** Monitor any upgrade issues for the upgraded Sales OU users. If all issues have been resolved successfully, install the SecureLogin upgrade on all laptops and workstations associated with the Central Administration and Human Resources OUs.

Set the directory database version to 6.0 on the Central Administration and Human Resources OUs to enable full upgrade functionality.

**Day 4:** Install the SecureLogin upgrade on workstations associated with the following OUs:

- ♦ Accounting
- ♦ Marketing

**Day 5:** Review and resolve any issues.

**Day 6:** Install the SecureLogin upgrade on workstations associated with the following OUs:

- ♦ Manufacturing
- ♦ Purchasing

Review any upgrade issues encountered by Central Administration OU users. If there are no problems, change the Directory Database version to **6.0** setting for the following OUs:

- ♦ Accounting
- ♦ Marketing

## **Week 2**

**Day 7:** All users now have upgraded the SecureLogin application installed.

Review and resolve any issues.

Upgrade the administration workstation.

**Day 8:** If all issues are resolved successfully, change the directory database version to **3.5** for all remaining OUs.

Ensure that the following OUs are also enabled simultaneously to provide service for mobile and Kiosk users:

- ♦ Manufacturing
- ♦ Purchasing

The changeover is planned to occur at midnight and all users have been requested to log out prior to or at this time and wait until 12.10 am before logging back in.

**Day 9:** Migration is completed. Review of the migration plan commences.

# 7 Troubleshooting

This section provides information to troubleshoot some of the issues encountered when using SecureLogin in a Citrix environment.

## SLLauncher Fails To Launch SLBroker

**Source:** With SecureLogin 6.1 and later, SLLauncher is not needed. However, it is still available for backward compatibility.

**Explanation:** The requirement does not require the new `SLNRMonitorServer.exe` and `SLWTS.exe` to run for all published applications and want only SL executables to be active when launched by SELECTED SSO enabled published applications.

All SecureLogin components must remain dormant until a SecureLogin enabled published application is launched.

**Possible Cause:** With SecureLogin 6.1, single sign on does not occur for published applications unless `SLNRMonitorServer.exe`, `SLWTS.exe`, or `SLProto` are already running. If these are not available in task manager, single sign on does not occur when a published application configured with `SLLauncher.exe` is launched. The task manager shows SLLauncher as active, but does not show SLBroker

**Action:** The group that manages Citrix must be able to test or troubleshoot issues by logging in to the Citrix servers either with SecureLogin enabled or disabled.

To resolve:

1. On the Citrix server start regedit and go to

`HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon.`

2. Double click on **AppSetup** entry and remove `sllauncher.exe`, `slwts.exe` from the value.

All published applications that have a single sign on service are no longer available because `slbroker.exe` is not no longer started through `slwts.exe`.

3. Create a separate published application for each published application that requires single sign on service by adding `sllauncher.exe` before the name of the application.

The behavior is now similar to the behavior prior to SecureLogin 6.1.

---

**IMPORTANT:** As with pre-6.1 releases, switches are not required to be specified after the application name.

---

