

Structured Data Manager

Software Version 7.60

Oracle E-Business Suite Modules Installation and
Deployment Guide



Document Release Date: August 2018
Software Release Date: August 2018

Legal notices

Copyright notice

© Copyright 2017-2018 Micro Focus or one of its affiliates.

The only warranties for products and services of Micro Focus and its affiliates and licensors (“Micro Focus”) are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Micro Focus shall not be liable for technical or editorial errors or omissions contained herein. The information contained herein is subject to change without notice.

Trademark notices

Adobe™ is a trademark of Adobe Systems Incorporated.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.

UNIX® is a registered trademark of The Open Group.

This product includes an interface of the 'zlib' general purpose compression library, which is Copyright © 1995-2002 Jean-loup Gailly and Mark Adler.

Documentation updates

The title page of this document contains the following identifying information:

- Software Version number, which indicates the software version.
- Document Release Date, which changes each time the document is updated.
- Software Release Date, which indicates the release date of this version of the software.

To verify you are using the most recent edition of a document, go to

<https://softwaresupport.softwaregrp.com/group/softwaresupport/search-result?doctype=online help>.

If you subscribe to the appropriate product support service, you will receive new or updated editions of documentation. Contact your Micro Focus sales representative for details.

To check for new versions of software, go to the [Micro Focus Software Licenses and Downloads Portal](#). Alternatively, to check for recent software patches, go to <https://softwaresupport.softwaregrp.com/patches>.

All sites listed in this section require you to sign in with a Software Passport. You can register for a Passport through a link on the site.

Support

Visit the [Micro Focus Software Support Online website](#) to access contact information and details about the products, services, and support that Micro Focus offers.

This website also provides customer self-solve capabilities. It gives you a fast and efficient way to access interactive technical support tools needed to manage your business. As a valued support customer, you can benefit by using the support website to:

- Search for knowledge documents of interest
- Submit and track support cases and enhancement requests
- Access the Software Licenses and Downloads portal
- Download software patches
- Access product documentation
- Manage support contracts
- Look up Micro Focus support contacts
- Review information about available services
- Enter into discussions with other software customers
- Research and register for software training

Most support areas require you to register as a Passport user and sign in. Many also require a support contract. You can register for a Software Passport through a link on the Software Support Online website. For

more information about the different access levels the website uses, go to <https://softwaresupport.oracle.com/web/software/softwaresupport/access-levels>.

Contents

About this document	6
Intended audience	6
Prerequisites	6
Related documentation	6
Chapter 1: Prerequisites	8
Before you begin	8
Obtain the latest documentation	8
Structured Data Manager installation overview	8
Chapter 2: Requirements	10
Operating system and server requirements	10
Software requirements	10
Oracle database requirements	10
Source database preparation for Oracle	11
Target database preparation for Oracle	12
Repository preparation	13
Custom target schema	13
Create the target schema or database	13
Create the target tables	14
Chapter 3: Installation	15
Install Structured Data Manager	15
Chapter 4: Business flow deployment	16
Import and deploy Oracle E-Business Suite integration kits	16
Import the business flows	16
Deploy EBSIntegrationCreateArchiveAccess	17
Deploy business flows	18
Recompile invalid objects	21
Run the EBSIntegrationCreateArchiveAccess business flow	21
Run the Create Archive Access responsibility script	22
Next step	24
Enable web server for archive access	24
Run the SplitRowid utility	28

Run reload/undo business flows	28
Chapter 5: Next steps	29
Chapter 6: Upgrade from 6.3 to 7.4 for Oracle E-Business Suite R12	30
Upgrade from 6.3 to 7.4	30
Example SQL scripts	31
Upgrade from 7.49 to 7.52	32
Glossary	33
Send documentation feedback	39

About this document

Structured Data Manager's integration kit for Oracle E-Business Suite modules provides a powerful, pre-built archive solution for Oracle E-Business Suite data. This guide covers:

- meeting the installation prerequisites for Oracle E-Business Suite
- installing Structured Data Manager
- deploying Oracle E-Business Suite business flows to your runtime system
- running the business flows to archive your Oracle E-Business Suite data

Intended audience

This guide is intended for:

- Administrators/operators who need to run Oracle E-Business Suite modules to archive data from Oracle E-Business Suite applications
- Administrators/operators who need to install Structured Data Manager, deploy and redeploy business flows, and run the business flows.

Prerequisites

Prerequisites for installing this product include:

- Knowledge of operating systems
- Database knowledge
- Application knowledge

Related documentation

- *Structured Data Manager API Reference Guide*
Provides information about the Groovy script API files for *Structured Data Manager*.
- *Structured Data Manager Concepts Guide*
Explains the major concepts of database archiving in general and Structured Data Manager in particular.
- *Structured Data Manager Installation Guide*
Explains how to use the Installer to install the product.

- *Structured Data Manager Tutorial*
Provides step-by-step instructions to build a sample archiving module, deploy it, run it, and troubleshoot errors.
- *Structured Data Manager Developers Guide*
Explains how to use the Designer component to design, build, test, and deploy your archiving projects.
- *Structured Data Manager Runtime Guide*
Explains how to use the Web Console component to run, monitor, and administer business flows that move data to and from the database.
- *Structured Data Manager Troubleshooting Guide*
Explains how to diagnose and resolve errors, and provides a list of common errors and solutions.
- *Structured Data Manager Upgrade Guide*
Explains how to upgrade the product and upgrade the archive schema generated by earlier versions of the product.
- *Structured Data Manager Release Notes*
Lists any items of importance that were not captured in the regular documentation.
- *Structured Data Manager PeopleSoft Modules Installation and Deployment Guide*
Explains how to install the PeopleSoft integration kit.
- *Structured Data Manager Oracle E-Business Suite Modules Installation and Deployment Guide*
Explains how to install the Oracle E-Business Suite integration kit.

Chapter 1: Prerequisites

Before installing the Structured Data Manager, you should ensure that you have the latest documentation, and that you understand the overall installation process.

- [Before you begin](#)
- [Obtain the latest documentation](#)
- [Structured Data Manager installation overview](#)

Before you begin

Before you begin archiving data using Structured Data Manager, you should:

1. Review the *Structured Data Manager Concepts Guide* to become familiar with the software and how you plan to use it.
2. Install Structured Data Manager according to the instructions in the *Structured Data Manager Installation Guide*.
3. Use the *Structured Data Manager Developer's Guide* to design and develop or customize your archive solution.

Obtain the latest documentation

The latest documentation for Structured Data Manager can be found on Micro Focus Software Support Online.

NOTE: This documentation is written to the latest patch version. If you have not installed the latest patch, there may be items in this documentation that do not apply to your environment.

Structured Data Manager installation overview

Before you can use Structured Data Manager to archive your data, you need to install the software, set up the database archiving components, and deploy the business flows that archive your data.

NOTE: If you are upgrading from earlier versions of Oracle E-Business Suite modules to R12, you must uninstall the older business flows before installing the R12 business flows.

Installing Structured Data Manager consists of the following main steps:

1. Review the introductory chapters in *Structured Data Manager Developers Guide* and *Structured Data ManagerRuntime Guide* to choose the archive solution that is right for you.
2. Ensure that the all the requirements for your servers, databases, and archiving solution have been met.

See also

[Operating system and server requirements](#)

[Software requirements](#)

[Oracle database requirements](#)

[Repository preparation](#)

3. Install Structured Data Manager. The installation installs the Web Console and Designer. See [Install Structured Data Manager, on page 15](#).
4. Start the Web Console to create the repository and set up database to database archiving.
5. Obtain the necessary project files for your Oracle E-Business Suite modules.

See [Import and deploy Oracle E-Business Suite integration kits](#)

6. Deploy the **EBSIntegrationCreateArchiveAccess** business flow. This business flow needs to be deployed first before deploying other business flows. You also need to run the `EBSIntegrationCreateArchiveAccess` business flow each time you deploy a new module business flow.

See [Deploy EBSIntegrationCreateArchiveAccess, on page 17](#).

7. Deploy the business flows you have created. You can deploy the business flows and cartridges using the Web Console.

See [Deploy business flows, on page 18](#).

8. Start the Web Console and launch the `EBSIntegrationCreateArchiveAccess` business flow.

See [Run the EBSIntegrationCreateArchiveAccess business flow, on page 21](#).

9. Customize your Oracle E-Business Suite project.

Chapter 2: Requirements

Structured Data Manager Oracle E-Business Suite integration kits have the following requirements for installation. Requirements vary depending how you plan to archive your data.

- [Operating system and server requirements](#)
- [Software requirements](#)
- [Oracle database requirements](#)
- [Custom target schema](#)

Related information:

Structured Data Manager Concepts guide

Structured Data Manager Installation guide

Structured Data Manager Runtime guide

Structured Data Manager Developers guide

Operating system and server requirements

The operating system and server requirements are documented in *Structured Data Manager Installation guide*.

Ensure that you meet the operating system and server requirements before installing Structured Data Manager.

Software requirements

Oracle E-Business Suite application requirements

- Oracle E-Business Suite software versions R12.2.3, R12.2.4 and R12.2.5 on Oracle databases with the latest patches require this release of Structured Data Manager.

Structured Data Manager requirements

- Before installing your Oracle E-Business Suite modules, ensure that you are running Structured Data Manager with the latest patches.

Oracle database requirements

Database to database archiving with Oracle E-Business Suite requires the following:

- a repository to store archiving metadata
- a source database from which to archive eligible data (also referred to as the active database)

- for distributed archive only, a target database in which to store archived data (also referred to as the archive database)

The repository, source and target databases require the following Oracle database version:

- Oracle 11g R2(11.2.3.0, 11.2.4.0)
- Oracle 12C (12.1.0.2.0)

An administrator account with the following privileges is required:

- Create Database
- Create Login
- Create User
- Grant permissions to non-owned tables

This document refers to this account as the system account, but it can have any name you assign to it.

NOTE: The source database, repository, and target database must use the same character encoding. If the character encoding is not the same, a warning is displayed in the installation summary.

Source database preparation for Oracle

1. Ensure there is 1.5 GB of available disk space to create tablespaces.

TIP: When you calculate the space requirements, you need to consider how much space you need for rollback segments and temporary segments.

2. Create the following data and index tablespaces.

Tablespace	Size	Usage
INTF_DATA	10 GB	Holds table data for the interface schema.
INTF_TEMP	10 GB	Holds temporary data for the interface schema.
ARC_DATA	100 GB	Holds table data for the archive access build schema.
ARC_TEMP	100 GB	Holds temporary data for the archive access build schema.

For example, use syntax similar to the following:

```
create tablespace OBT_DATA datafile '<path>/OBT_DATA.dbf' size 1GB autoextend  
on;
```

where <path> is the directory location where you want to save the tablespace datafile.

The tablespaces are selected during installation.

3. If you are using the distributed archive configuration option, add an entry in tnsnames.ora for the target database.

4. Add the following entries to the source database init.ora file:
 - `_PUSH_JOIN_UNION_VIEW = TRUE`
 - `COMPATIBLE = <current_database_release>`

Target database preparation for Oracle

The target or archive database is required for the distributed archive configuration option.

NOTE:

Ensure the procedures in this section are complete before you run the Web Console.

1. Create a target database with the following configuration:
 - Default LARGE init.ora parameters

The `init.ora` parameter values depend upon the size of the installation, and are recommended by Micro Focus service representatives.
 - 8 K for the `db_block_size` parameter, or the same as the source database
 - `NLS_LANGUAGE` character set must be the same as the source database
2. Create or expand the following tablespaces:

Tablespace	Size	Usage
HIST_DATA	50 GB	Holds table data for the history schema.
HIST_TEMP	10 GB	Holds temporary data for the history schema.
RELOC_DATA	2 GB	For distributed archive only, holds table data for the relocation schema.
RELOC_TEMP	2 GB	For distributed archive only, holds temporary data for the relocation schema.
AA_DATA	10 GB	Holds table data for the archive access schema.
AA_TEMP	1 GB	Holds temporary data for the archive access schema.

The tablespaces are selected during installation.

3. Add an entry in `tnsnames.ora` for the source database.
4. Ensure the `db_domain` of the target database is the same as the `db_domain` of the source database.

If the `db_domain` is different, set `global_names` to `FALSE`.

Repository preparation

Structured Data Manager requires a repository to store archiving metadata. The repository should reside on an existing database where backups are regularly performed.

1. Identify a persistent database meeting the following requirements:
 - **Database version**—the database you choose for your repository must have the same database version as the source database.
 - **Available tablespace**—4 GB
 - **Available disk space**—1 GB
2. Create the following tablespaces:

Tablespace	Size	Usage
REP_DATA	800 MB	Holds table data for the repository schema.
REP_TEMP	800 MB	Holds temporary data for the repository schema.

The tablespaces are selected during installation.

3. When you set up database to database archiving, select the tablespaces that you created.

Custom target schema

Database to database archiving requires a target schema for Oracle. The target schema is created automatically when you run Setup Database to Database Archiving from the Web Console.

The default target schema is created using the naming convention <source_database_name>_HIST, where <source_database_name> is the name of your source database. Creating your own target schema enables you to select a name that matches your existing naming conventions.

When you create your own target schema, you can also choose to create your own target tables. This enables you to use tables with partitions in your database to database archiving environment.

If you create your own target schema, you must also register the owner mappings.

For more information, see *Structured Data Manager API Reference Guide*.

If you choose to create your own target schema and target tables, perform the steps in the following sections:

Create the target schema or database

1. Create a schema on the target database for each schema on the source database.
2. Ensure that the schema or database owner has the following permissions:

- CREATE SESSION
 - CREATE TABLE
 - CREATE DATABASE LINK
 - SELECT ANY DICTIONARY
3. Run the owner mapping API to ensure that the target schema is updated before you deploy any business flows.

For more information, see *Structured Data ManagerAPI reference guide*.

Create the target tables

After you have created your own target schema, you can use the Web Console to create the target tables.

If you choose to create the tables manually, you must ensure the following:

- Ensure each table contains the following columns.

Column name	Data type	Value
OBT_SAVED_ROWID	ROWID	not null
OBT_ROW_SEQ	NUMBER	not null
OBT_WF_RUN_ID	VARCHAR2(128)	not null

- Ensure the new table names match managed table names in the source database or schema.
- Ensure all column names, data types, lengths, and null/not null properties for the managed tables are the same.
- If you choose to create the target driving table, it must also contain the following column:

Column name	Data type	Value
OBT_TIMESTAMP	DATE	SYSDATE

Chapter 3: Installation

Structured Data Manager installation installs the Web Console and Designer.

- [Install Structured Data Manager](#)

See also:

Structured Data Manager Installation Guide

Structured Data Manager Runtime Guide

Install Structured Data Manager

Before deploying the business flows for your Oracle E-Business modules, you must install Structured Data Manager and set up the Web Console:

- Install as per the instructions in the *Structured Data Manager Installation Guide*
- Set up the Web Console as per the instructions in the *Structured Data Manager Runtime Guide*.

NOTE: If you are upgrading from 6.3 to 7.4 for Oracle E-Business Suite R12, see [Upgrade from 6.3 to 7.4 for Oracle E-Business Suite R12, on page 30](#).

Chapter 4: Business flow deployment

Use the Web Console to configure database to database archiving and to deploy business flows against a database for execution.

- [Import and deploy Oracle E-Business Suite integration kits](#)
- [Run the EBSIntegrationCreateArchiveAccess business flow, on page 21](#)
- [Run the Create Archive Access responsibility script, on page 22](#)
- [Enable web server for archive access, on page 24](#)
- [Run the SplitRowid utility, on page 28](#)
- [Run reload/undo business flows, on page 28](#)

See also *Structured Data Manager Runtime Guide*

NOTE: If you are running on AIX, you need to perform some additional steps because the Web Console requires the Java 6 32-bit JRE. For detailed information, see the *Structured Data Manager Runtime Guide*.

Import and deploy Oracle E-Business Suite integration kits

The Oracle E-Business Suite integration kits are delivered on a CD or as .zip files you can download.

Import the business flows

To import the business flow

1. Open the .zip file containing the Oracle E-Business Suite kits.

The .zip file contains individual .zip files for each Oracle E-Business Suite module. For example, OEB512i_sdm_<rel_no>_<bld_no>_<rev_no>.zip (where rel_no is the Structured Data Manager release number, bld_no is the build number and rev_no is the revision number) contains the files for the Oracle E-Business Suite Accounts Receivable module and the integration layer business flows.

2. Unzip the .busflow files into the businessflow directory for your Structured Data Manager installation, for example, C:\SDM\OBTHOME\businessflow.

NOTE: If you do not unzip the files into the businessflow directory, use **Business Flow Deployment > Deployment > Import** from the Web Console in order to deploy them.

Deploy EBSIntegrationCreateArchiveAccess

To deploy

CAUTION:

You must deploy the EBSIntegrationCreateArchiveAccess business flow *prior* to deploying any other business flow. This business flow also executes the create_AA job.


1. If the Web Console is not running, select **Start > Programs > Structured Data Manager > Click Start Web Console**.
2. Launch the Web browser.
3. Log in.
4. Click **Business Flow Deployment**.
5. Click **Deployment**.

TIP: If you did not unzip the business flow files into the businessflow directory, you would need to click **Deployment > Import** and import the business flows first.

6. Select **EBSIntegrationCreateArchiveAccess <rel_no>_<bld_no>_<rev_no>.busflow**, for example, EBSIntegrationCreateArchiveAccess.7_51_1_12_274_274.busflow.

CAUTION:

Do not select any other business flows to deploy at this time.

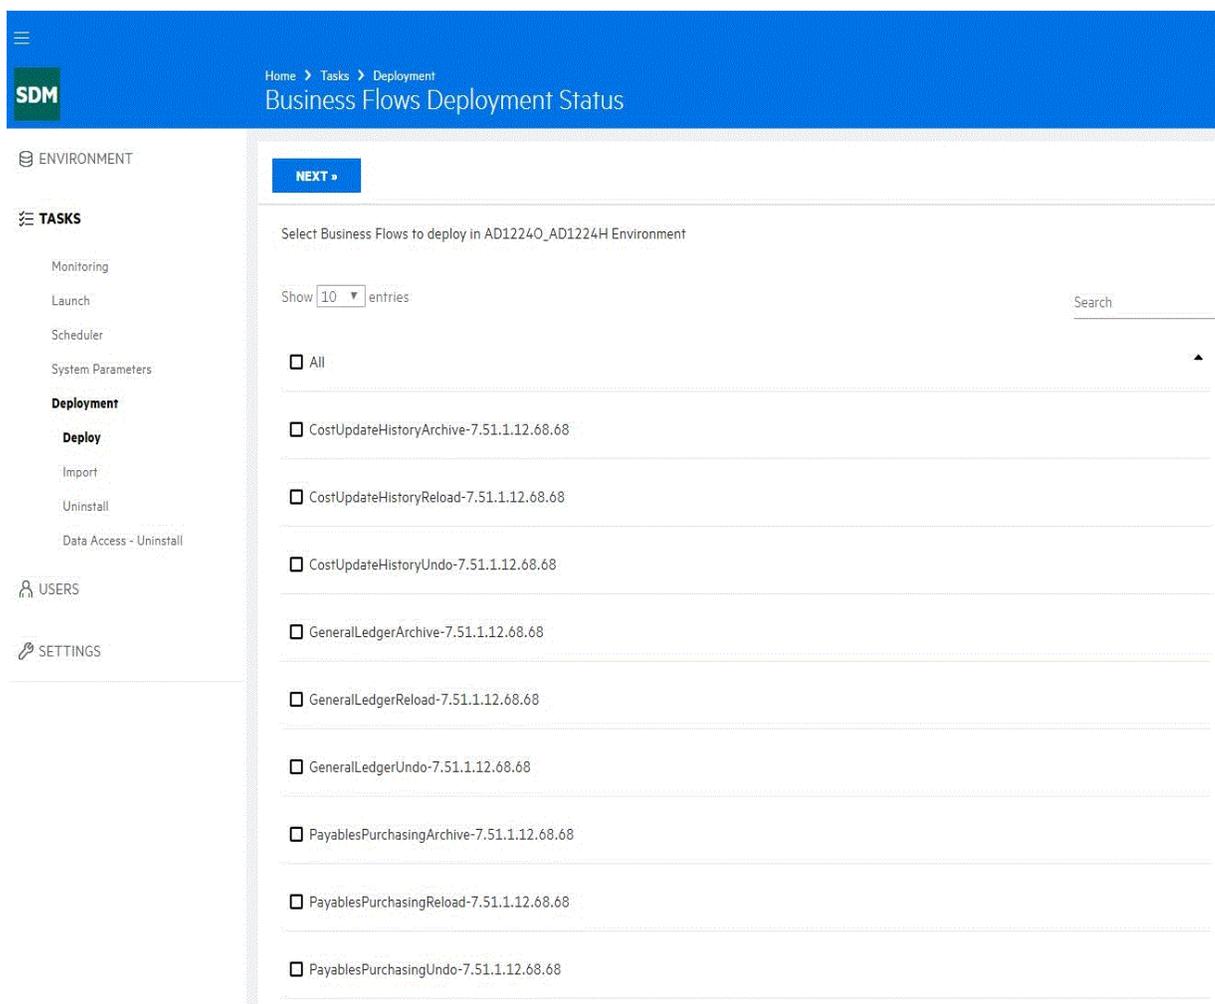

7. Click **Next**. The Summary page displays.

NOTE: If you have previously deployed the business flow, the Job History Retention page appears. You can choose whether to drop history. Exercise extreme caution when selecting **Drop Database to Database History tables of existing Business Flows**. It should rarely, if ever, be used in a production environment on real data because it can result in permanent data loss.

8. Click **Finish**.

NOTE: After deploying **EBSIntegrationCreateArchiveAccess**, you can deploy additional business flows at the same time. Only union-view configuration is supported for integration layer.

Deploy business flows

After you deploy **EBSIntegrationCreateArchiveAccess**, you can proceed to deploy your other business flows, for example, General Ledger.

You deploy business flows that you created or modified from your Oracle E-Business Suite project from the Web Console.

Generated business flows are ZIP files with a `.busflow` extension. Generated business flows that have not been modified are located in the `deployables` directory extracted in [Import the business flows](#), on page 16.


Typically, you deploy and run the business flows against a development instance of your Oracle E-Business Suite database first to test it. Once you have perfected the business flows in your development instance, you can deploy them to the production instance of your database.

CAUTION:


After deploying all of the Oracle E-Business Suite modules, you must run the `EBSIntegrationCreateArchiveAccess` business flow, then run the `Create Archive Access` responsibility script. For detailed information, see [Run the EBSIntegrationCreateArchiveAccess business flow](#), on page 21 and [Run the Create Archive Access responsibility script](#), on page 22.

The pages you see during deployment may vary depending upon your configuration. The following is intended only as an example.

1. Select one or more business flows.

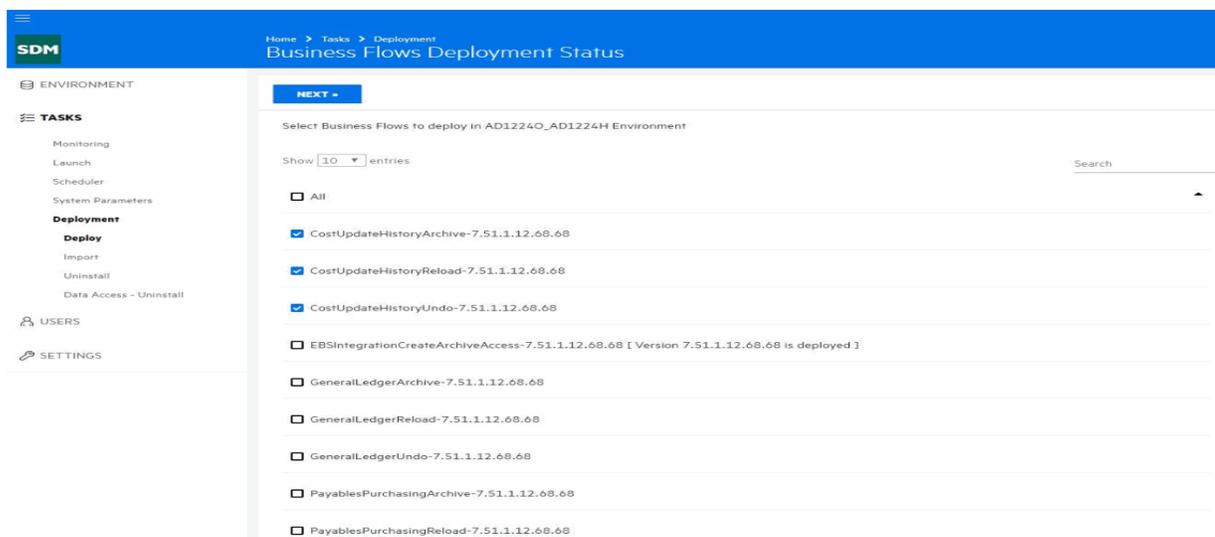


2. Click **Next**.
The Source Database Administrator page displays.
3. Accept the default user or enter a user name.
4. Enter a password.
5. Enter and confirm the passwords for the target database.

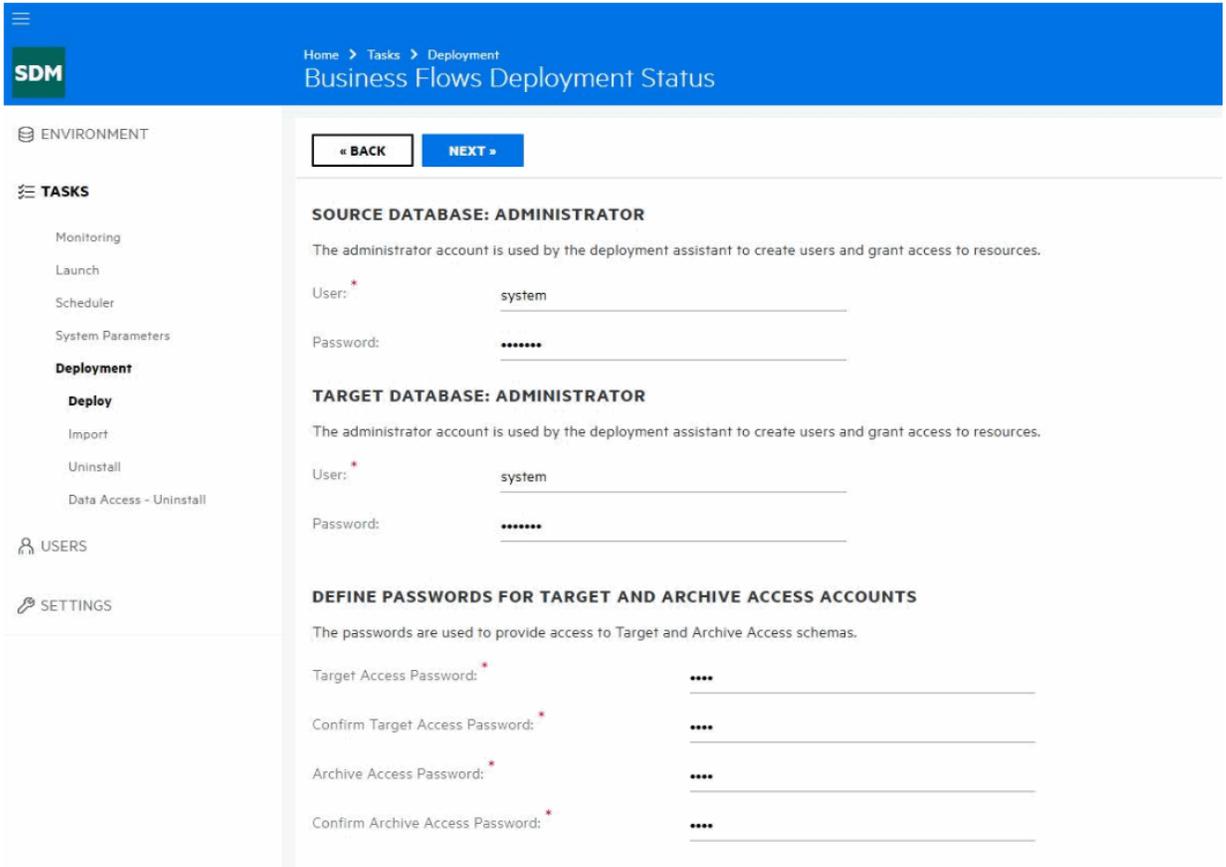

6. Click **Next**.

The Define Tablespaces page displays.

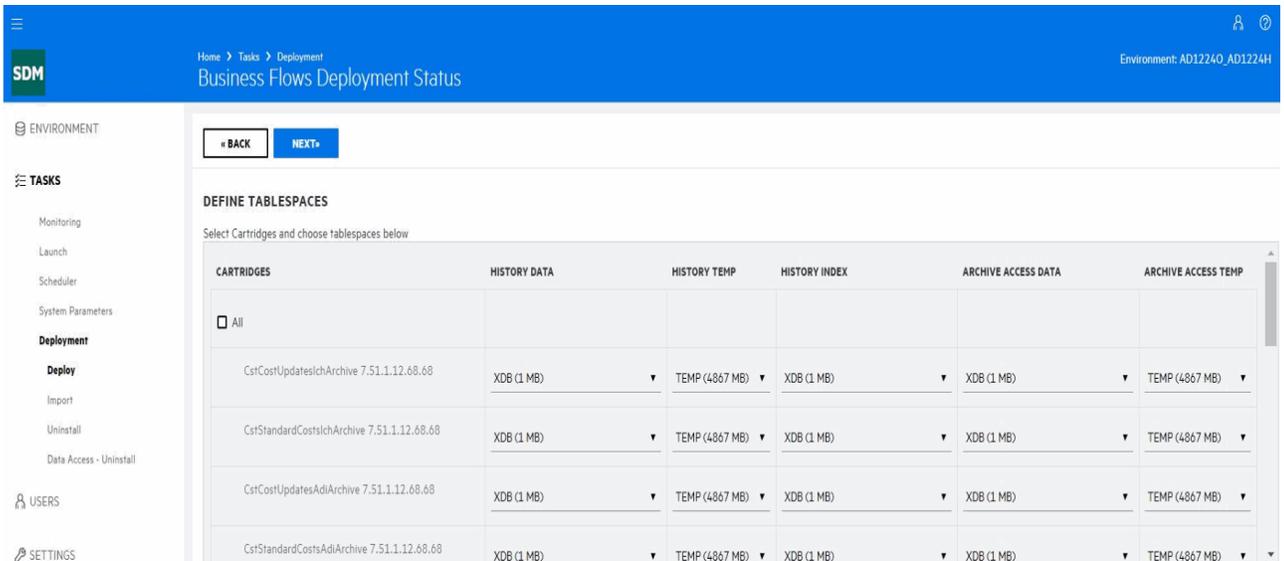

NOTE: You can split the archived data and the indexes into two separate table spaces.

7. Adjust the settings if necessary and click **Next**. The Summary page displays.
8. Click **Finish**.

Recompile invalid objects

After you deploy your business flows on Oracle, some of the objects may be marked as invalid by Oracle. The objects are not invalid but are marked as such due to a limitation of Oracle. To remove the invalid designation for the objects, you can run `obt_recompile_invalid_objects.sql` found in `<install_dir>/foundation/util/sql/oracle`.

Run the EBSIntegrationCreateArchiveAccess business flow

After deploying the EBSIntegrationCreateArchiveAccess business flow, you will need to run it to execute the create_AA job.

NOTE: You must run the **EBSIntegrationCreateArchiveAccess** business flow every time you install a new business flow or reinstall a business flow where changes were made to the model.

1. If the Web Console is not running, select **Start > Programs > Structured Data Manager > click Start Web Console**.
2. Launch the Web browser.
3. Log in.
4. Click **Business Flow Deployment**.
5. Click **Launch**.


The Business Flow page displays.

The screenshot shows the 'Business Flows' page in the Structured Data Manager (SDM). The page has a blue header with the SDM logo and navigation links: Home > Tasks > Launch > Business Flow. Below the header is a sidebar with navigation options: ENVIRONMENT, TASKS (Monitoring, Launch, Business Flow, Relocate, Import, Create Archive Access, Scheduler, System Parameters, Deployment), USERS, and SETTINGS. The main content area displays a table of business flows. The table has two columns: BUSINESS FLOW and VERSION. The flows listed are CostUpdateHistoryArchive, CostUpdateHistoryReload, and EBSIntegrationCreateArchiveAccess, all with version 7.51.1.12.68.68. The EBSIntegrationCreateArchiveAccess flow is highlighted in blue. The page also includes a search bar, a 'Show 10 entries' dropdown, and navigation buttons for PREVIOUS, 1, and NEXT.

BUSINESS FLOW	VERSION
CostUpdateHistoryArchive	7.51.1.12.68.68
CostUpdateHistoryReload	7.51.1.12.68.68
EBSIntegrationCreateArchiveAccess	7.51.1.12.68.68


6. Click **EBSIntegrationCreateArchiveAccess**.

The Job Launch page displays.

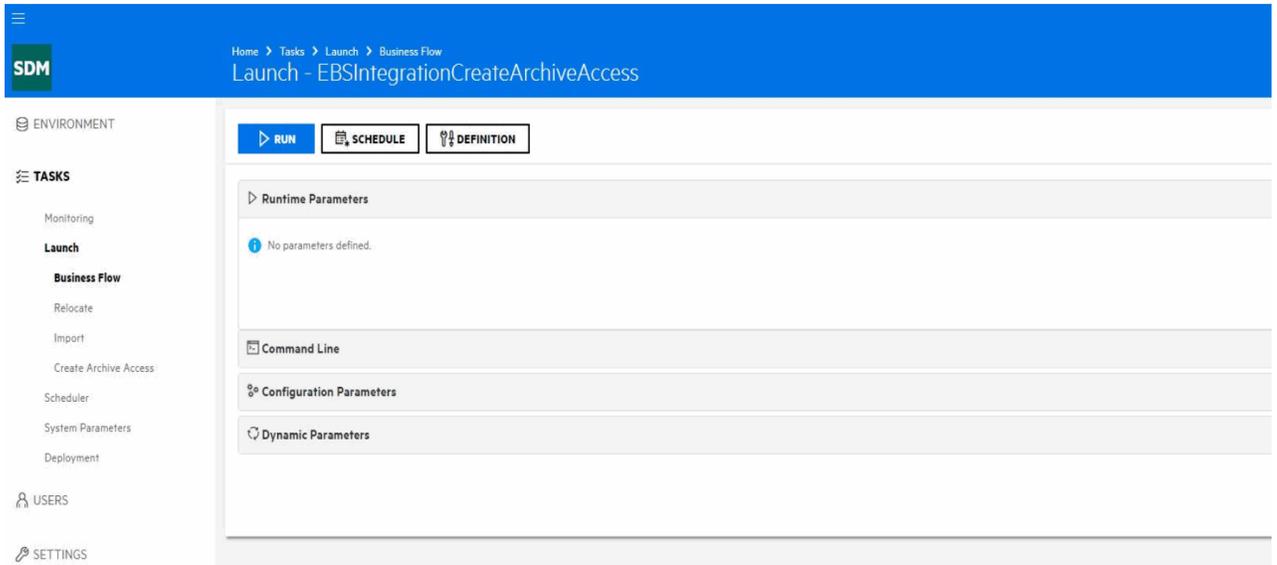

7. Click **Run**. Confirm that you want to run the business flow.

The Launch page displays.

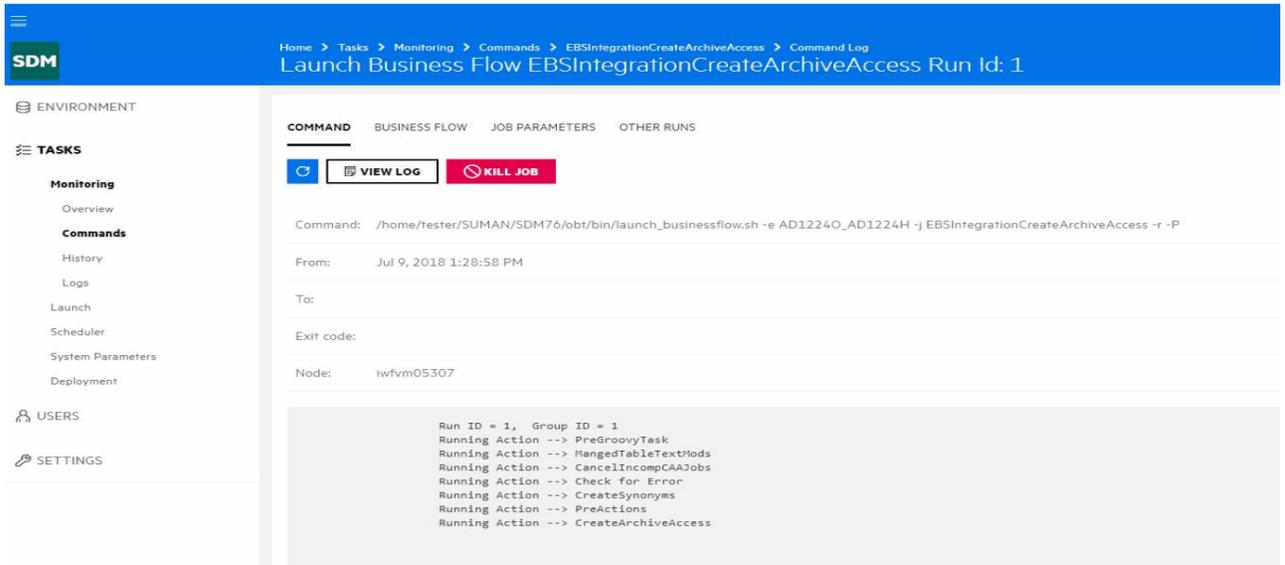

To view the status of this business flow, click **Monitoring**, and select **Overview**.

Run the Create Archive Access responsibility script

After deploying and running the EBSIntegrationArchiveAccess business flow, you need to execute the Create Archive Access responsibility script. This script creates the necessary responsibilities which will allow you to access the archived data.

NOTE: This script needs to be executed from SQL*Plus prompt as the APPS user on the source database.

1. Navigate to the directory containing the oebms_create_arch_responsibilities.sql script. For example:

```
<install_dir>\OBTHOME\artifacts\<environment
name>\businessflow\EBSIntegrationCreateArchiveAccess\lib.
```

where <install_directory> is the location where Structured Data Manager is installed.

2. Invoke SQL *Plus and log in as the APPS user on the source database.
3. Run the script. For example:

```
@oebms_create_arch_responsibilities.sql.
```

4. Enter values for the following.

Prompt	Description
1) Enter Application Short Name OR press Enter to create archive responsibility for all applications.	Enter the application short name, for example GL, to create Archive responsibilities only for the general ledger application Application Pack users. To create the Archive responsibility for all of Oracle E-Business Suite Software, press the Enter key on the keyboard.
2) Enter Responsibility Key OR press Enter to create all archive responsibilities for the given application.	Enter one of the following: <ul style="list-style-type: none"> • a unique primary key for the user profile • the user profile name • press the Enter key The first two options create the Archive responsibilities only for specific users. The last option creates Archive responsibilities for all users belonging to the application selected at the first prompt.
3) Enter the responsibility data group OR Hit Return for "Standard" data group.	If the database uses more than one language, for example, Japanese and English, use the responsibility data group to create archive responsibility for each language. For more information, contact Micro Focus Support. If the database is only in English, use the default Standard data group.
4) Enter "Y/N" to assign archive responsibility to the user who has the corresponding application responsibility.	Enter Y to assign the Archive responsibility to the specified user or users. Enter N to prevent the Archive responsibility from being assigned to any users.
5) If 'Y' entered for previous	Enter the specific user to assign Archive responsibility, or

Prompt	Description
prompt, Enter User Name to assign cloned responsibility to a specific user with original responsibility OR Hit Return to assign cloned responsibility to all users with original responsibility. If 'N' entered for previous prompt, hit Return.	press the Enter key.
6) Enter the Archive Access schema name	Enter the name of the Archive Access Schema to which access is granted, or press the Enter key to use the default value. The default value is 'AA Schema'
7) Enter (maximum 6 characters) archive data group prefix OR Hit Return to apply the default prefix to the new archive data group.	Enter the prefix that identifies the archive data group, or press the Enter key to use the default value. For example, enter 'Arch-' to create an archive data group like 'Arch-Standard'. The default prefix is 'Archive'.
8) Enter (maximum 6 characters) archive responsibility prefix OR Hit Return to apply the default prefix to the new archive responsibilities.	Enter the prefix that identifies the responsibility as an Archive responsibility. For example, enter 'Archive' to create a responsibility like 'Archive GL SuperUser'. The default prefix is 'Arch-'.

Next step

Continue with the following chapter, [Next steps](#).

Enable web server for archive access

For Oracle E-Business Suite 12.1.3, you need to create a separate web server for Micro Focus Application Information Optimizer archive access. The steps that follow are intended only as a guide. For detailed task and reference information about Oracle E-Business Suite, you need to see your Oracle E-Business Suite Documentation Web Library on the Oracle web site.

1. Shutdown all of the components of the Oracle E-Business Suite application tier using the appropriate script(s), for example, `$ADMIN_SCRIPTS_HOME/adopmctl.sh stopall`.
2. Copy the following files and directories to a new location, changing their names. For directories, make sure you copy all of files and subdirectories under the directory.
 - The contents of the `$FND_SECURE` directory
 - The following directories under the `$INST_TOP` directory:

- pids/10.1.3
 - logs/ora/10.1.2
 - logs/ora/10.1.3
 - ora/10.1.2
 - ora/10.1.3
 - The scripts under the \$ADMIN_SCRIPTS_HOME directory:
 - adopmnctl.sh
 - adapcctl.sh
 - adoacorectl.sh
 - adoafmctl.sh
3. Start all components of the Oracle E-Business Suite application tier using the appropriate script, for example, \$ADMIN_SCRIPTS_HOME/adopmnctl.sh startall.
 4. In the location where you made copies of the web server files and directories, remove the following files and subdirectories:
 - pids/10.1.3
 - logs/ora/10.1.2
 - logs/ora/10.1.3
 - The following directories under ora/10.1.3:
 - j2ee/oacore/persistence
 - j2ee/oafm/persistence
 - j2ee/forms/persistence
 5. Modify the copied configuration files:
 - a. Change paths to reflect the new directory name in all of the configuration files.
 - b. Change APPS (ignoring case) to the archive access schema name in all configuration files.
 - c. Change IAS ID and IAS NAME to the new value in the following configuration files. IAS ID and IAS NAME must match in these files.
 - ora/10.1.3/config/ias.properties
 - ora/10.1.3/opmn/conf/opmn.xml
 6. Change the network port and port number ranges in the following files to be unique and different from those of original Oracle E-Business Suite web server:
 - ONS Local Port
 - ONS Remote Port
 - ONS Request Port

- IASPT AJP Port Range
 - OC4J AJP Port Range for Home
 - OC4J RMI Port Range for Home
 - OC4J JMS Port Range for Home
 - OC4J AJP Port Range for Oacore
 - OC4J RMI Port Range for Oacore
 - OC4J JMS Port Range for Oacore
 - OC4J AJP Port Range for Forms
 - OC4J RMI Port Range for Forms
 - OC4J JMS Port Range for Forms
 - OC4J AJP Port Range for Oafm
 - OC4J RMI Port Range for Oafm
 - OC4J JMS Port Range for Oafm
 - OC4J AJP Port Range for Forms-c4ws
 - OC4J RMI Port Range for Forms-c4ws
 - OC4J JMS Port Range for Forms-c4ws
 - JMS Web Port
 - JMS Server Port
 - Web Listener Port
 - Web SSL Port
 - Forms Default Web Site Port
 - RMI XML Port
 - RMI XML SSL Port
 - Java Object Cache Port
 - Forms Port
7. Navigate to the Define profile options and query on the options listed in [Table 1 Profile options to update, on the next page](#):
- a. Change Hierarchy to Security, and set visible/update allowed to Responsibility level.
 - b. Change the following web agent profiles for each archive access responsibility to be the URL for the newly created web server.

Table 1 Profile options to update

Profile Option Name	Application
APPS_FRAMEWORK_AGENT	Application Object Library
APPS_JSP_AGENT	Application Object Library
APPS_WEB_AGENT	Application Object Library
APPS_SERVLET_AGENT	Application Object Library

8. Replicate the JAVA CLASS objects and create them in the APPS_AA schema as follows:

- a. Connect as APPS_AA user.
- b. Execute the following to generate the scripts:

```

declare
    cursor c2 is
        SELECT object_name FROM all_objects
        WHERE object_type = 'JAVA CLASS'
        AND owner = 'APPS_AA';

    a varchar(1000);
begin
    FOR I IN C2
    LOOP
        a:='DROP JAVA CLASS "'||i.object_name||'";';
        dbms_output.put_line('a '||a);
    END LOOP;
end;
/
    
```

- c. Execute the generated scripts.
- d. Execute the following to generate the scripts:

```

declare
    cursor c1 is
        SELECT object_name FROM all_objects
        WHERE object_type = 'JAVA CLASS'
        AND status = 'VALID'
        AND owner = 'APPS'
        and object_name not in (select object_name from all_objects where owner=
'APPS_AA');

    a varchar(1000);
begin
    for i in c1
    loop
        a:='CREATE SYNONYM "'||i.object_name||'"
FOR '||'APPS.'"||i.object_name||'";';
        dbms_output.put_line(a);
    end loop;
end;
    
```

```
        end loop;  
    end;  
/
```

- e. Execute the generated scripts.
9. Start the web server for archive access by running the scripts you renamed in step 2 with the `start` argument.

NOTE: To stop the web server for archive access, run the same scripts with the `stop` argument.

Run the SplitRowid utility

The SplitRowid utility enhances the performance of union views from the Structured Data Manager transparency layer for Oracle E-Business Suite R12 and 11*i*. For more information about the utility and how to run it, see its `readme` file.

Run reload/undo business flows

Before you run reload or undo business flows for any module, you must disable the INSERT trigger on all of the managed tables. Otherwise, you could have a problem with the number of records.

Chapter 5: Next steps

Running Oracle E-Business Suite business flows requires that you perform the following tasks:

1. Deploy business flows. See [Business flow deployment, on page 16](#).
2. Optionally, run the Create_AA business flow if you have deployed a new archive business flow or if you have redeployed a business flow with changes to the model.
3. Run business flows.

You use business flows to execute your archive logic. All deployed business flows that can be run in an environment are displayed in the Web Console. see the Web Console online help if you need further help running business flows.

4. Optionally, if you should ever need to remove a business flow, you are able to do so. You can use the Web Console to uninstall business flows. By default, the job run history is left intact. see the Web Console online help for more information.

For the above tasks, see also:

- *Structured Data Manager Tutorial*
- *Structured Data Manager Runtime Guide*

Chapter 6: Upgrade from 6.3 to 7.4 for Oracle E-Business Suite R12

When upgrading from Micro Focus Database Archiving 6.3 to Structured Data Manager 7.1, you must perform a number of steps to migrate your modifications forward to the new release.

Upgrade from 6.3 to 7.4

NOTE: This procedure references two SQL scripts. See [Example SQL scripts, on the next page](#) for examples of these scripts. You might need to modify these scripts for your environment in order for this procedure to work.

To upgrade

1. Backup the directory where you have installed Micro Focus Database Archiving 6.3.
2. Connect as the owner of the repository.
3. Run and save the results of [6x_config_params.sql, on the next page](#).
4. Uninstall your Oracle E-Business modules but not any custom modules.
5. Backup the `obtsc_text_replacers` table.
6. Connect as the owner of the repository.
7. Run and save the results of [6x_text_replacers.sql, on page 32](#).
8. Truncate the `obtsc_text_replacers` table.
9. Upgrade to Structured Data Manager 7.4 following instructions in the *Structured Data Manager Upgrade Guide*, including recommendations on files to copy over from the previous installation directory.
10. Apply any available patches for the release.
11. Contact Micro Focus Support to see if you need any hot fixes for this release.
12. Remove all files related to the standard Oracle E-Business Suite business flows from `<install_dir>/OBTHOME/businessflow/<environment>`. Do **not** remove any files for custom business flows.
13. Import and deploy the 7.4 `EBSIntegrationCreateArchiveAccess` business flow.
14. Import and deploy all of the other new 7.4 Oracle E-Business Suite modules.
15. If you had 6.3 custom SQL scripts to create text replacers, run them.
16. Run and save the results of [6x_text_replacers.sql, on page 32](#). Compare the results to what you got from the run against 6.3 in [Run and save the results of 6x_text_replacers.sql, on page 32., above](#). Look for combinations of `object_name`, `object_type`, and `sequence` that existed in 6.3 but do not exist in 7.4. Report any objects that appear for 6.3 but not 7.4 to Micro Focus Support.
17. In the Web Console, go to **Parameters > Database to Database** and change **Create synonyms to dependent packages defined with invokers' rights** to `false`.

18. Set the parameter **Recreate all managed table dependent objects** to Yes.
19. Run `EBSIntegrationCreateArchiveAccess`.
20. Run and save the results of `6x_config_params.sql`, below. Compare the result to what you got when you ran it in [Run and save the results of 6x_config_params.sql, on the next page., on the previous page.](#)
21. Update the parameter values to match what you had in 6.3.
22. Set the **Type of index to drop on History** parameter to **Operate on no indexes**.
23. If the **Data movement Batch size** parameter was listed for any cartridge in the result from `6x_config_params.sql`, set **Number of driving table rows per commit for Fully Transactional operation** to the value that was previously set for **Data movement Batch size**.
24. If you installed the Receivables module, take the following steps:
 - a. Connect as the repository user and run this query to get the cartridge name for the Receivable Transactions Archive:

```
select identifier
from obtcm_installed_components
where identifier like 'ReceivableTransactionsArchive%'
```
 - b. For any rows returned by the previous query, add the following statements to your `sql_tuning` properties in `<install_directory>/obt/config`:

```
<environment>.NATIVE_MOVE_O2H.<cartridge name>.RCTLGD.DELETE_TP_
RANGE.PREEXEC_NAME=ar_apps_init

<environment>.NATIVE_MOVE_O2H.<cartridge name>.RCTLGD.DELETE_TP_NO_
RANGE.PREEXEC_NAME=ar_apps_init
```
25. Set the parameter **Recreate all managed table dependent objects** back to No.

Example SQL scripts

The preceding procedure references two SQL scripts. Following are examples, which you may need to modify depending upon your environment.

`6x_config_params.sql`

```
select a.appspack_name, apt.display_name, ap.prop_value
from obtcfg_appspack_properties ap,
obtcfg_appspack_property_types apt,
obtpa_appspacks a
where ap.appspack_property_type_id = apt.id
and apt.appspack_id = a.id
union
select '(Business Flow)' cartridge,
bpt.display_name, bp.prop_value
from obtcfg_busflow_properties bp,
obtcfg_busflow_property_type bpt
```

```
where bp.businessflow_property_type_id = bpt.id  
;
```

6x_text_replacers.sql

```
select dod.object_name, dod.object_type, tr.sequence,  
tr.search_pattern, tr.replacement_text, tr.required,  
tr.global_replace, tr.instance  
from obtsc_db_object_defs dod, obtsc_text_replacers tr  
where dod.id = tr.db_object_def_id  
order by dod.object_name, dod.object_type, tr.sequence;
```

Upgrade from 7.49 to 7.52

To upgrade

1. Backup the directory where you have installed Structured Data Manager 7.49.
2. Connect as the owner of the repository.
3. Backup the `obtsc_text_replacers` table.
4. Upgrade to Structured Data Manager 7.52 following instructions in the *Structured Data Manager Upgrade Guide*, including recommendations on files to copy over from the previous installation directory.
5. Apply any available patches for the release.
6. Import and deploy the 7.52 **EBSIntegrationCreateArchiveAccess** business flow.
7. Import and deploy all of the other new 7.52 **Oracle E-Business Suite** modules.
8. In the Web Console, go to **Parameters > Database to Database** and change Create synonyms to dependent packages defined with invokers' rights to false.
9. Set the parameter, **Recreate all managed table dependent objects** to **Yes**. Structured Data Manager (7.52)
10. Run **EBSIntegrationCreateArchiveAccess**.

Glossary

active database

The database from which you plan to move or copy data. Typically, this database is your online transaction processing (OLTP) or production database. In a two- or three-tiered configuration, the active database resides on tier one and is the source for data movement operations.

active environment

The Web Console views and acts upon only one environment at a time, the active environment. To switch the active environment, you use the Change Active option in the Web Console.

activity

In Designer, a component of a business flow, which is added by using the toolbar. For example, you can add archive and reload activities to your business flow. Note, activities in a business flow are different from what you see at runtime and therefore do not necessarily map directly to what you see in the Web Console.

advanced selection

A method of data selection that discovers all of the interrelated rows from multiple tables and conceptually places them in the same application partition for archiving.

annotation

In Designer, a comment associated with the project, or one of its objects or components. These comments are collected and published in a PDF file when you right click a project or business flow and select Generate Documentation.

application partitioning

The concept of partitioning related rows together during data selection, regardless of whether they are in one or more tables. Application partitioning is unique to Structured Data Manager and contrasts with the more common table partitioning offered by the database management software, which only groups related rows from one table.

archive data store

The location where the data is to be archived. Can be a separate database, separate space on the same database, or an XML file. In a two-tiered configuration, the archive data store resides on tier two and can be a database or XML. In a three-tiered configuration, the archive data store is a database on tier two and XML on tier three, and is the target for data movement operations.

archive query server

The component that provides SQL access to XML database archives.

Consolidated Archive

A managed, scalable repository that consolidates electronic communications, attachments, and files, and provides complete control over corporate information assets, facilitating compliance with internal corporate governance policies and procedures as well as externally mandated laws and regulations.

business flow

A series of activities, such as archive operations and scripts, that run in sequence. You build business flows in Designer.

business flow status

The Web Console shows the last run of each business flow. The states are Complete/Error/Running.

cartridge

An instance of model- or schema-based eligibility criteria used to move or copy data from one location to another. Cartridges capture the application and business rules to ensure referential integrity of the data. For any one model in your project, you may have many cartridges that use it.

chaining table

The lower level table in a many-to-one or a many-to-many relationship between higher level and lower level tables in the model hierarchy.

classification

The Content Manager (formerly Records Manager) classification to be applied to the data moved by Structured Data Manager. This classification specifies where to place the data when it is

ingested by Content Manager. For more information, see the Content Manager documentation.

collection

The configuration of a directory location and file pattern to match a set of archived XML files, thus allowing SQL access to the archived data.

comma separated values (CSV)

A database-to-file output format that stores the data as values separated by commas and a metadata file. Each line in the CSV file corresponds to a row in a table. Within a line, fields are separated by commas, each field belonging to one table column. CSV files provide a simple format that many applications can import.

command

Command files or JavaScript files launched by the Web Console on your behalf with status displays.

condition

In Designer, the way you branch your business flow to run or skip an activity based on some criteria.

configuration parameter

A type of parameter that has its values set by an administrator (someone who has repository privileges from the Web Console) through the administrator interface. Typically, this type of parameter represents values that should be changed very infrequently, perhaps only at deployment time.

console user

The Web Console identifies individual users, who are distinct from database users. The properties for a user are User Name, Full Name, Password, Enabled, Description, Email, Phone, and Privileges.

console user name

The login name associated with a Web Console user.

constraint

A column or a list of columns that enables you to identify rows in the database and relate them to one another.

custom properties

User-created name/value pairs in cartridges and business flows. These values are exposed at runtime as parameters.

customization

A change that an administrator or DBA makes to a project provided by a third party, typically for a packaged application like Oracle PeopleSoft or Oracle E-Business Suite. As long as the customization is allowable by the project, the user can merge the customization into newer revisions of the third party project.

customization mode

A Designer mode that provides visual cues to indicate customizations in the model. In a project with locked files, customization mode is on by default, but you can toggle it on and off from the toolbar in the model editor.

data access cartridge

A cartridge that provides lightweight query access to retired or archived data. Data access cartridges are designed by the archive developer but can be run by business users with no technical expertise.

data masking

The process of replacing private or confidential data during movement with a specified mask. You can choose from pre-defined masks that are part of Micro Focus or create your own mask. A mask may or may not be reversible upon reload from the archive data store.

data movement

The method used by Structured Data Manager to actually move data (transactional, bulk or partitioned for database to database, and copy or archive for database to file).

data transparency

The ability to access archived data through your standard application interfaces for data access. Data transparency enables users to access archived data as though it were still in the active database.

database constraint

A constraint that exists in the database and can be discovered and referenced from Designer.

database to database

A movement in which data goes from an active database to an archive database, or separate tablespaces inside the active database.

Typically, the archive database is located on cheaper storage devices.

database to file

A movement in which data goes from an active database to a file (XML or CSV format), which is offline but still accessible through SQL using the archive query server and a client tool of your choice.

deployment assistant

The user interface component within Designer used to deploy or generate business flows.

description

A technical description created by the developer for her own reference. These descriptions do not appear in the generated PDF file for the cartridge or business flow.

Designer

The user interface component used to develop, test, and deploy your archiving solution.

Designer is a powerful graphical development environment for archive solutions.

distributed instance

A configuration option for database-to-database archiving where the data you archive is stored on a separate database from the source or active database.

DRE

See [Dynamic Reasoning Engine \(DRE\)](#).

driving table

A driving object is a root of a model hierarchy. Its relationship to the child tables drives the selection of transactions.

dynamic list of values

A list of values for a parameter that obtains its members from a SELECT statement that returns identifiers and labels.

dynamic parameter

A type of parameter that has its value set by a Groovy script that runs at deployment time to obtain a value. For example, this type of

parameter can supply the type or version of a database or application, which can be obtained programmatically at deployment time.

Dynamic Reasoning Engine (DRE)

A platform technology that uses high performance pattern-matching algorithms to search for content stored in Micro Focus repositories. Performs core information operations for contextual analysis and concept extraction, enabling solutions for the categorization, summarization, personalization, hyperlinking, and retrieval of all forms of information.

environment

The source and (optional) target credentials against which you plan to run commands. You can define multiple environments within your installation to identify various source and target databases.

error

One of the ways in which you can interrupt a business flow. Error indicates that the business flow failed for some reason.

exclusive rules

One of the ways in which Structured Data Manager determines whether to include or exclude rows from the archive operation. Exclusive rules require all rows in the constraint table to match for inclusion. Exclusive rules exclude the instance if the condition on any child is false, like STATUS='CLOSED'.

exit

One of the ways in which you can interrupt a business flow. You can exit successfully or with a warning.

export

The way that you save an Structured Data Manager project to an exchange format (.hdp) from the File menu. See also *import*.

export data

The way that a user can send data to CSV format from Preview using the toolbar item.

generate documentation

The process of collecting and grouping all annotations into a PDF file that also describes

the business flow or cartridge structure.

history schema

For database-to-database archiving, the schema in the target database where the archived data is stored.

IDOL

See [Intelligent Data Operating Layer \(IDOL\)](#).

import

The way that you transfer projects from exchange format (.hdp) into the Project Navigator. You can also use import to migrate cartridges created in 5.1 to 6.x. See also *export*.

inclusive rules

One of the ways in which Structured Data Manager determines whether to include or exclude rows from the archive operation. Inclusive rules require only one row in the constraint table to match the rule and be included. Inclusive rules include the instance if the condition on any child is true, like `PRODUCT_RECALLED='Y'`.

indexing cartridge

A cartridge that indexes your data for better searching. For example, you might associate an indexing cartridge with a database-to-file archiving cartridge to improve performance when querying the archive data files.

Intelligent Data Operating Layer (IDOL)

An information processing layer that collects indexed data from connectors and stores it in a structure optimized for fast processing and retrieval, integrating unstructured, semi-structured, and structured information from multiple repositories.

interrupt

The way to stop or pause a business flow (pause, error, exit with warning, exit successfully).

local deployment

The generation and deployment of your cartridge or business flow to an environment on your local, Designer client. Deployment files are generated locally and then deployed to the designated, local environment.

lookup table

A table that contains helpful non-transactional information. For example, non-transactional information could be status definitions, or the name of the sales representative.

managed table

A table in the model that is copied and then purged from the active database by a cartridge. Transactional, chaining, and driving tables in a model are all typically managed tables.

model

A model identifies the tables and table relationships representing a business entity or related business entities. A project can have multiple models. Each model contains a driving table and all of its child and descendent tables.

model compatibility

Each model in your project can have one or more dynamic parameters associated with it to verify the compatibility with the target environment. If the compatibility parameter returns false, then the cartridge referencing the model will not deploy or run and throw an error. For example, the script could return false for Oracle 10.2 and true for Oracle 11.1 to indicate that a cartridge referencing the model can only deploy and run against Oracle 11.1.

model-based cartridge

A cartridge that moves data based upon a defined data model with relationships. This type of cartridge is typically used for ongoing archive operations.

non-intrusive environment

In a non-intrusive environment, data is archived without an interface schema and a generic JDBC driver is used. A non-intrusive environment enables you to copy or archive data from read-only sources, which is especially helpful in cases where the data is associated with older technologies that might not support basic SQL statements or when the database administrator or company policy prohibits write access to the production environment.

OLTP database

The online transaction processing database that typically is your active or source database.

pause

One of the ways in which you can interrupt a business flow. Pausing suspends the business flow while awaiting operator intervention.

Content Manager

Enterprise document and records management software designed to simplify the capture, management, security, and access to information. Content Manager enables organizations to more easily comply with regulations and corporate policies, and it helps secure information from inappropriate access and misuse.

reload

The act of taking data from an archive data store and loading it into the active database.

remote deployment

The generation and deployment of your cartridge or business flow to an environment on a system that is remote from your Designer client. Deployment files are generated locally and then deployed to the designated, remote environment.

repository

The location that holds business flow metadata, product configuration data, and data collected during runtime. The repository can be located on your active database or another logical database.

rule

Qualifications added to the model in order to include or exclude data based on certain criteria. For example, you might add a rule to exclude from archiving any orders that are not yet closed.

runtime parameter

A type of parameter that has its values set by the operator executing the job in Console or on the command line. Typically, this type of parameter represents operational values that tend to change frequently and therefore need to be set each time the job is run.

schema-based cartridge

A cartridge that moves data based upon the database schema rather than a defined data model with relationships. This type of cartridge is

typically used for database retirement or the cleanup of orphan tables.

selection

The form of data selection to use (standard or advanced) for choosing data. When deploying a cartridge or adding it to a business flow, you must specify the selection method.

single instance

A configuration option for database-to-database archiving where the data you archive is stored on the same database (Oracle) or the same server (SQL Server) as the source or active database.

source

The location (database) from which you are copying or moving data.

SQL access server

See *archive query server*.

standard selection

A method of data selection that restricts itself to the rows identified by the model. Unlike advanced selection, it does not attempt to traverse related rows across multiple tables.

structured records management

A type of solution that extracts structured data from a source application and moves it into XML format. The XML is then ingested into the corporate records management system for long term management and eventual disposal according to corporate policy.

table use

A database table, view, or synonym that is referenced in Designer, for example, in the model. The same table can be used multiple times in a model. For example, a table could be appear as a transactional table and a lookup table in the same model.

target

The location (database or XML) to which you are copying or moving data.

tier

A level in your database archiving configuration. You can have two- or three-tiered configurations. In a two-tiered configuration, tier one contains your active database and tier two your archive

data store, which can be a database or XML. In a three-tiered configuration, tier one contains your active database, tier two an archive database, and tier three XML.

transactional data movement

Transactional movement uses set-based data movement and is the default method of movement.

transactional table

A table that contains information about the business transaction. For example, a transactional table might contain detailed tax or payment information related to each business transaction.

unique identifiers (UIDs)

A 16 hexadecimal identifier calculated based on the content of a Designer file. This value is used to determine if the user has customized key pieces of a project.

unmanaged table

A table in a model that is copied but not purged from the active database by a cartridge. Lookup tables in a model are typically unmanaged tables.

Vertica

Column-oriented SQL database management software for storing and analyzing structured data. Used to manage large, fast-growing volumes of data and provide fast query performance for data warehouses and other query-intensive applications.

virtual constraint

A constraint that you define in Designer that only exists within Structured Data Manager.

Web Console

A browser-based interface where you can create and manage your deployment environments, and deploy, run, administer, and monitor your business flows.

Send documentation feedback

If you have comments about this document, you can [contact the documentation team](#) by email. If an email client is configured on this system, click the link above and an email window opens with the following information in the subject line:

Feedback on Oracle E-Business Suite Modules Installation and Deployment Guide (Micro Focus Structured Data Manager 7.60)

Add your feedback to the email and click **Send**.

If no email client is available, copy the information above to a new message in a web mail client, and send your feedback to swpdl.sdm.docfeedback@microfocus.com.

We appreciate your feedback!

