




VisiBroker 8.5.2

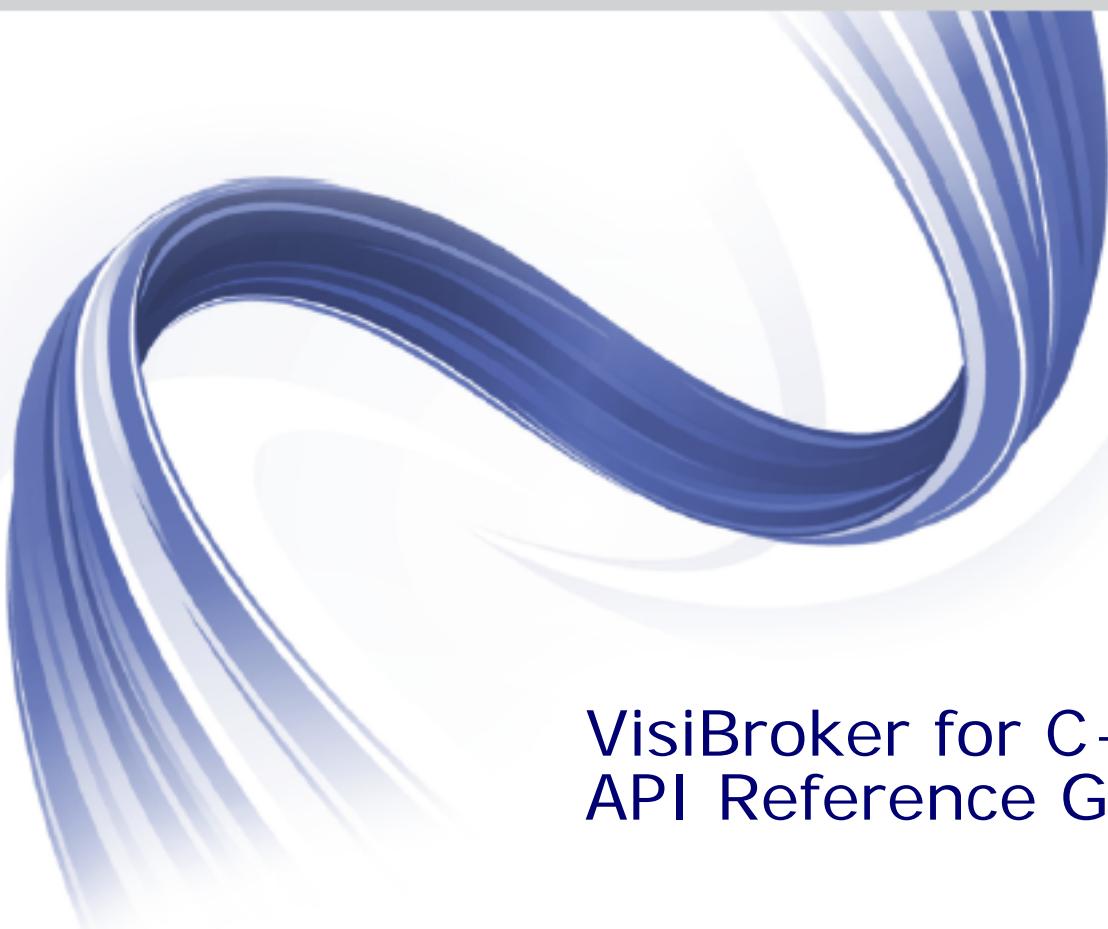

VisiBroker for C++
API Reference Guide

Micro Focus
The Lawn
22-30 Old Bath Road
Newbury, Berkshire RG14 1QN
UK

<http://www.microfocus.com>

Copyright © Micro Focus 2009-2014. All rights reserved. VisiBroker contains derivative works of Borland Software Corporation, Copyright 1992-2010 Borland Software Corporation (a Micro Focus company).

MICRO FOCUS, the Micro Focus logo and Micro Focus Licensing are trademarks or registered trademarks of Micro Focus IP Development Limited or its subsidiaries or affiliated companies in the United States, United Kingdom and other countries.

BORLAND, the Borland logo and VisiBroker are trademarks or registered trademarks of Borland Software Corporation or its subsidiaries or affiliated companies in the United States, United Kingdom and other countries.

All other marks are the property of their respective owners.

2014-06-25

Contents

Introduction to VisiBroker	1
Accessing VisiBroker online help topics in the standalone Help Viewer	1
Accessing VisiBroker online help topics from within a VisiBroker GUI tool.....	1
Documentation conventions.....	2
Platform conventions.....	2
Contacting Micro Focus	2
Further Information and Product Support.....	2
Information We Need	3
Contact information	3
Generated interfaces and classes	5
Generated interfaces and classes overview	5
<Interface_name>.....	5
<Interface_name>ObjectWrapper	5
POA<class_name>	6
tie<class_name>	6
<class_name>_var	6
Core interfaces and classes	7
PortableServer::AdapterActivator	7
IDL Definition.....	7
PortableServer::AdapterActivator methods.....	7
BindOptions	7
Include file	8
BindOptions members	8
BOA	9
Include file	9
CORBA::BOA methods.....	9
Deprecated methods	12
VisiBroker extensions to CORBA::BOA	13
CompletionStatus	14
IDL Definition.....	14
CompletionStatus members	14
Context	14
Include file	14
Context methods	14
PortableServer::Current.....	16
IDL Definition.....	16
PortableServer::Current methods.....	17
Exception.....	17
Include file	17
Object	17
Include file	17
CORBA::Object methods.....	18
VisiBroker extensions to CORBA::Object	20
ORB	22
Include file	22
CORBA::ORB methods.....	22
VisiBroker extensions to CORBA::ORB	28
PortableServer::POA	29
PortableServer::POA methods	29
PortableServer::POAManager.....	38
Include file	39
PortableServer::POAManager methods	39

Principal.....	41
Include file	41
Principal methods.....	41
PortableServer::RefCountServantBase.....	41
Include file	41
PortableServer::RefCountServantBase methods	41
PortableServer::ServantActivator	42
Include file	42
PortableServer::ServantActivator methods	42
PortableServer::ServantBase	43
Include file	43
PortableServer::ServantBase methods	43
PortableServer::ServantLocator.....	44
Include file	44
PortableServer::ServantLocator methods	44
PortableServer::ServantManager	45
Include file	45
SystemException.....	45
Include file	45
SystemException methods.....	46
UserException.....	47
Include file	47
UserException methods.....	48
UserException derived classes.....	48
Dynamic interfaces and classes	49
Any	49
Include file	49
Any methods	49
Insertion operators.....	50
Extraction operators	50
ContextList	51
ContextList methods.....	51
DynamicImplementation	53
DynamicImplementation methods	53
DynAny.....	53
Include file	54
Important usage restrictions	54
DynAny methods.....	54
Extraction methods	55
Insertion methods	56
DynAnyFactory.....	57
DynAnyFactory methods	57
DynArray	57
Important usage restrictions	57
DynArray methods	57
DynEnum	58
Important usage restrictions	58
DynEnum methods.....	58
DynSequence	59
Important usage restrictions	59
DynSequence methods	59
DynStruct	60
Important usage restrictions	60
DynStruct methods	60
DynUnion	61
Important usage restrictions	61

DynUnion methods	61
Environment	62
Include file	62
Environment methods	63
ExceptionList	63
ExceptionList methods	64
NamedValue	65
Include file	65
NamedValue methods	65
NVList	66
Include file	66
NVList methods	66
Request	69
Include file	69
Request methods	69
ServerRequest	72
Include file	73
ServerRequest methods	73
TCKind	75
TypeCode	76
Include file	76
TypeCode constructors	76
TypeCode methods	76

Interface repository interfaces and classes (C++) 81

AliasDef	81
AliasDef methods	81
ArrayDef	81
ArrayDef methods	81
AttributeDef	82
AttributeDef methods	82
AttributeDescription	83
AttributeDescription members	83
AttributeMode	83
AttributeMode values	83
ConstantDef	83
ConstantDef methods	84
ConstantDescription	84
ConstantDescription members	84
Contained	85
Include file	85
Contained methods	85
Container	87
Include file	87
Container methods	88
DefinitionKind	92
DefinitionKind values	92
Description	93
Description members	93
EnumDef	93
EnumDef methods	93
ExceptionDef	94
ExceptionDef methods	94
ExceptionDescription	94
ExceptionDescription members	94
FixedDef	95
Methods	95

FullInterfaceDescription.....	96
FullInterfaceDescription members	96
FullValueDescription.....	97
Variables.....	97
IDLType	98
Include file	98
IDLType methods	98
InterfaceDef	98
Include file	98
InterfaceDef methods	99
InterfaceDescription	100
InterfaceDescription members	101
IROObject	101
Include file	101
IROObject methods	101
ModuleDef	102
ModuleDescription	102
ModuleDescription members	102
NativeDef	102
OperationDef	102
Include file	102
OperationDef methods	103
OperationDescription	104
OperationDescription members	104
OperationMode.....	105
OperationMode values.....	105
ParameterDescription	105
ParameterDescription members.....	105
ParameterMode	106
ParameterMode values	106
PrimitiveDef.....	106
PrimitiveDef methods	106
PrimitiveKind	106
PrimitiveKind values	106
Repository	107
Include file	107
Repository methods.....	108
SequenceDef	109
SequenceDef methods	109
StringDef	109
StringDef methods	110
StructDef	110
StructDef methods	110
StructMember.....	111
StructMember methods.....	111
TypedefDef	111
TypeDescription	111
TypeDescription members	111
UnionDef	112
UnionDef methods.....	112
UnionMember	112
UnionMember members	112
ValueBoxDef	113
Methods.....	113
ValueDef	113
Methods.....	113
ValueDescription	115

Values.....	116
WstringDef.....	116
WStringDef methods	116
Activation interfaces and classes.....	117
ImplementationStatus	117
Include file	117
ImplementationStatus members	117
OAD	118
Include file	119
OAD methods	119
ObjectStatus	122
Include file	122
ObjectStatus members	122
ObjectStatusList	122
Include file	122
ObjectStatusList methods	123
Naming Service interfaces and classes (C++)	125
NamingContext.....	125
Include file	125
Code sample	125
NamingContext methods	126
NamingContextExt	130
Include file	130
Code sample	130
NamingContextExt methods	130
Binding and BindingList.....	132
Include file	132
Code sample	132
BindingIterator	132
Include file	132
Code sample	133
BindingIterator methods	133
NamingContextFactory.....	133
Include file	134
Code sample	134
Methods	134
ExtendedNamingContextFactory.....	135
Include file	135
Code sample	135
Methods	135
Event service interfaces and classes.....	137
ConsumerAdmin	137
IDL definition	137
ConsumerAdmin methods	137
EventChannel	137
IDL definition	138
Methods	138
EventChannelFactory	138
IDL definition	138
EventChannelFactory methods	139
ProxyPullConsumer	139
IDL definition	139
ProxyPushConsumer.....	140
IDL definition	140

ProxyPullSupplier	140
IDL definition.....	140
ProxyPushSupplier.....	140
IDL definition.....	141
PullConsumer	141
IDL definition.....	141
PushConsumer	141
IDL definition.....	141
PullSupplier	142
IDL definition.....	142
PullSupplier methods	142
PushSupplier	142
IDL definition.....	142
SupplierAdmin	143
IDL definition.....	143
Server Manager Interfaces and Classes	145
The Container Interface.....	145
Include file	145
The Container Interface	145
Methods related to property manipulation and queries	145
Methods related to operations.....	147
Methods related to children containers.....	147
Methods related to storage	148
The Storage Interface	149
Include file	149
Storage Interface Methods for C++	149
Transaction Service interfaces and classes	151
CosTransactions and VISTransactions modules.....	151
Looking at the CosTransactions module	151
Data types	151
Structures.....	152
Exceptions	153
Looking at the VISTransactions module	154
Current interface	154
Choosing a Current interface	154
Obtaining a Current object reference	156
Using the Current object reference	156
Is your VisiTransact Transaction Service instance available?	156
Checked behavior.....	157
Current methods.....	157
Status value definitions.....	160
TransactionalObject interface	167
TransactionFactory interface.....	168
TransactionFactory methods	169
Control interface	171
Terminator interface	172
Terminator methods	173
Coordinator interface	175
Coordinator methods	176
RecoveryCoordinator interface.....	181
RecoveryCoordinator methods	182
Resource interface.....	182
Resource methods.....	183
Synchronization interface	186
Synchronization methods	187

VISTransactionService class.....	189
VISTransactionService methods	189
Commands and arguments.....	190
Overview of VisiTransact commands	190
vbconsolew.....	190
ots	191
vshutdown.....	191
Command-line arguments for applications.....	193
Passing command-line arguments to ORB_init() using argc and argv ...	193
Arguments for applications that originate transactions	193
Arguments for applications with an embedded VisiTransact Transaction Service instance	194
Error codes	196
VisiTransact Transaction Manager common error codes	196
VisiTransact Transaction Service error codes	197
VisiTransact transaction log error codes	199
Native Messaging Interfaces and Classes for C++	201
RequestAgent	201
Include File	201
IDL definition	201
RequestAgent Methods	202
create_request.....	202
poll.....	202
destroy_request.....	202
RequestDesc	203
Include File	203
IDL Definition.....	203
RequestDesc Fields	203
ReplyRecipient	204
Include File	204
ReplyRecipient methods.....	204
reply_available.....	204
REPLY_NOT_AVAILABLE	205
Include File	205
IDL definition	205
Property	205
Include File	205
IDL definition	205
Property Fields	205
PropertySeq	206
Include File	206
OctetSeq	206
Include File	206
RequestTag	206
Include File	206
RequestTagSeq	206
Include File	206
Cookie.....	207
Include File	207
DuplicatedRequestTag.....	207
Include File	207
PollingGroupsIsEmpty	207
Include File	207
RequestNotExist	207
Include File	207

Portable Interceptor interfaces and classes for C++	209
About Interceptors	209
ClientRequestInfo	210
Include file	210
ClientRequestInfo methods	211
ClientRequestInterceptor	212
Include file	212
ClientRequestInterceptor methods	213
Codec	214
Include file	215
Codec Member Classes	215
Codec Methods	215
CodecFactory	216
Include file	216
CodecFactory Member	216
CodecFactory Method	216
Current	217
Include file	217
Current Methods	217
Encoding	218
Include file	218
Members	218
ExceptionList	218
Include file	219
ForwardRequest	219
Include file	219
Interceptor	219
Include file	219
Interceptor methods	219
IORInfo	220
Include file	220
IORInfo Methods	220
IORInfoExt	222
Include file	222
IORInfoExt Methods	222
IORInterceptor	222
Include file	223
IORInterceptor Methods	223
ORBInitializer	224
Include file	224
ORBInitializer Methods	224
ORBInitInfo	225
Include file	225
ORBInitInfo Member Classes	225
ORBInitInfo Methods	225
Parameter	228
Include file	228
Members	228
ParameterList	228
Include file	228
PolicyFactory	228
Include file	228
PolicyFactory Method	229
RequestInfo	229
Include file	229
RequestInfo methods	229
ServerRequestInfo	232

Include file	233
ServerRequestInfo methods	233
ServerRequestInterceptor	235
Include file	235
ServerRequestInterceptor methods	235
VisiBroker Interceptor and object wrapper interfaces and classes for C++	239
Introduction	239
InterceptorManagers	239
IOR templates	240
InterceptorManager	240
InterceptorManagerControl	240
Include file	240
InterceptorManagerInterceptor method	240
BindInterceptor	241
Include file	241
BindInterceptor methods	241
BindInterceptorManager	242
Include file	242
BindInterceptorManager method	242
ClientRequestInterceptor	243
Include file	243
ClientRequestInterceptor methods	243
ClientRequestInterceptorManager	244
Include file	244
ClientRequestInterceptorManager methods	245
POALifeCycle Interceptor	245
Include file	245
POALifeCycleInterceptor methods	245
POALifeCycleInterceptorManager	246
Include file	246
POALifeCycleInterceptorManager method	246
ActiveObjectLifeCycleInterceptor	246
Include file	246
ActiveObjectLifeCycleInterceptor methods	247
ActiveObjectLifeCycleInterceptorManager	247
Include file	247
ActiveObjectLifeCycleInterceptorManager method	247
ServerRequestInterceptor	248
Include file	248
ServerRequestInterceptor methods	248
ServerRequestInterceptorManager	249
Include file	249
ServerRequestInterceptorManager method	249
IORCreationInterceptor	249
Include file	250
IORInterceptor method	250
IORCreationInterceptorManager	250
Include file	250
IORCreationInterceptorManager method	250
VISClosure	251
Include file	251
VISClosure members	251
VisExtendedClosure	251
Code sample	251
VISClosureData	252

VISClosureData methods.....	252
ChainUntypedObjectWrapperFactory	252
Include file	252
ChainUntypedObjectWrapperFactory methods	252
UntypedObjectWrapper	253
Quality of Service interfaces and classes	255
CORBA::PolicyManager	255
IDL definition.....	255
Include file	255
Methods.....	255
CORBA::PolicyCurrent.....	256
IDL definition.....	256
Include file	256
CORBA::Object	256
IDL definition.....	256
Include file	257
Methods.....	257
Messaging::RebindPolicy	258
IDL definition.....	258
Include file	258
Policy values.....	259
QoSExt::DeferBind Policy	259
IDL definition.....	259
Include file	260
QoSExt::RelativeConnectionTimeoutPolicy	260
IDL definition.....	260
Include file	260
Messaging::RelativeRequestTimeoutPolicy	260
IDL definition.....	260
Include file	261
Messaging::RelativeRoundtripTimeoutPolicy	261
IDL definition.....	261
Include file	261
Messaging::SyncScopePolicy.....	261
IDL definition.....	261
Include file	262
IOP and IIOP interfaces and classes.....	263
IOP::ProfileBody	263
Include file	263
ProfileBody members.....	263
IOP::IOR.....	264
Include file	264
IOR members	264
IOP::TaggedProfile	264
Include file	264
TaggedProfile members	264
Marshal buffer interfaces and classes	265
CORBA::MarshallInBuffer	265
Include file	265
CORBA::MarshallInBuffer constructors/destructors	265
CORBA::MarshallInBuffer methods	266
CORBA::MarshallInBuffer operators	268
CORBA::MarshallOutBuffer	269
Include file	269

CORBA::MarshalOutBuffer constructors/destructors.....	269
CORBA::MarshalOutBuffer methods.....	270
CORBA::MarshalOutBuffer operators	272
Location service interfaces and classes	273
Agent	273
IDL definition	273
Include file	274
Agent methods.....	274
Desc	277
IDL definition	278
Desc members	278
Fail	278
Fail members	278
TriggerDesc.....	279
IDL definition	279
TriggerDesc members.....	279
TriggerHandler.....	279
IDL definition	279
Include file	280
TriggerHandler methods.....	280
<type>Seq	280
<type>Seq methods	281
<type>SeqSeq.....	281
<type>SeqSeq methods	281
Initialization interfaces and classes	283
VISInit	283
Include file	283
VISInit constructors/destructors	283
VISInit methods	284
Real-Time CORBA interfaces and classes	285
Introduction	285
Include file	285
RTCORBA::Current	286
RTCORBA::Current Creation and Destruction	286
IDL definition	286
RTCORBA::Current methods.....	286
RTCORBA::Mutex	287
Mutex Creation and Destruction.....	287
IDL definition	287
RTCORBA::Mutex Methods	288
RTCORBA::NativePriority.....	288
RTCORBA::Priority	289
IDL definition	289
RTCORBA::PriorityMapping	289
PriorityMapping Creation and Destruction.....	290
IDL definition	290
PriorityMapping Methods.....	290
RTCORBA::PriorityModel	291
RTCORBA::PriorityModelPolicy	292
IDL definition	292
RTCORBA::RTORB	292
RTORB Creation and Destruction.....	292
IDL definition	293
RTORB Methods.....	293

RTCORBA::ThreadpoolId	295
IDL definition.....	296
RTCORBA::ThreadpoolPolicy	296
IDL definition.....	296
Pluggable Transport Interface Classes.....	297
VISPTransConnection	297
Include file	297
VISPTransConnection methods	297
VISPTransConnectionFactory	300
Include file	300
VISPTransConnectionFactory methods.....	300
VISPTransListener	301
Include file	301
VISPTransListener methods	301
VISPTransListenerFactory	302
Include file	302
VISPTransListenerFactory methods	302
VISPTransProfileBase	303
Include file	303
VISPTransProfileBase methods	303
VISPTransProfileBase members	304
VISPTransProfileBase base class methods	304
VISPTransProfileFactory	305
Include file	305
VISPTransProfileFactory methods.....	305
VISPTransBridge.....	306
Include file	306
VISPTransBridge methods	306
VISPTransRegistrar	306
Include file	306
VISPTransRegistrar methods	307
VisiBroker for C++ Logging	309
VISDLoggerMgr.....	309
Include file	309
VISDLoggerMgr methods.....	309
VISDLogger	311
Include file	311
VISDLogger methods.....	311
VISDAppenderFactory	311
Include file	311
VISDAppenderFactory methods	311
VISDAppender	312
Include file	312
VISDAppender methods	312
VISDLayoutFactory	313
Include file	313
VISDLayoutFactory methods	313
VISDLayout	313
Include file	314
VISDLayout methods	314
VISDConfig.....	314
Include file	314
LogAppenderConfig structure.....	314
VISDLogRecord	315
Include file	315

VISDLogRecord methods	315
VISDLogLevel	316
Include file	316
Level enumeration	316
Index	317

Introduction to VisiBroker

VisiBroker is a set of services and tools that enable you to build, deploy, and manage distributed enterprise applications in your corporate environment. These applications provide dynamic content by using JSP, servlets, and Enterprise Java Bean (EJB) technologies.

Accessing VisiBroker online help topics in the standalone Help Viewer

To access the online help through the standalone Help Viewer on a machine where the product is installed, use one of the following methods:

Windows

- Choose Start > Programs > VisiBroker > Help Topics
- or
- Open the Command Prompt and go to the product installation \bin directory, then type the following command:
`help`

UNIX

Open a command shell and go to the product installation /bin directory, then enter the command:

```
help
```

Tip

During installation on UNIX systems, the default is to not include an entry for bin in your PATH. If you did not choose the custom install option and modify the default for PATH entry, and you do not have an entry for current directory in your PATH, use ./help to start the help viewer.

Accessing VisiBroker online help topics from within a VisiBroker GUI tool

To access the online help from within a VisiBroker GUI tool, choose Help > Help Topics.

The Help menu also contains shortcuts to specific documents within the online help. When you select one of these shortcuts, the Help Topics viewer is launched and the item selected from the Help menu is displayed.

Documentation conventions

The documentation for VisiBroker uses the typefaces and symbols described below to indicate special text:

Convention	Used for
<i>italics</i>	Used for new terms and book titles.
computer	Information that the user or application provides, sample command lines and code.
bold computer	In text, bold indicates information the user types in. In code samples, bold highlights important statements.
[]	Optional items.
...	Previous argument that can be repeated.
>	Two mutually exclusive choices.

Platform conventions

The VisiBroker documentation uses the following symbols to indicate platform-specific information:

Windows: All supported Windows platforms.

Win2003: Windows 2003 only

WinXP: Windows XP only

Win2000: Windows 2000 only

UNIX: UNIX platforms

Solaris: Solaris only

Linux: Linux only

Contacting Micro Focus

Our Web site gives up-to-date details of contact numbers and addresses.

Further Information and Product Support

Additional technical information or advice is available from several sources.

The product support pages contain a considerable amount of additional information, such as:

- The WebSync service, where you can download fixes and documentation updates.
- The Knowledge Base, a large collection of product tips and workarounds.
- Examples and Utilities, including demos and additional product documentation.

To connect, enter <http://www.microfocus.com> in your browser to go to the Micro Focus home page.

Note:

Some information may be available only to customers who have maintenance agreements.

If you obtained this product directly from Micro Focus, contact us as described on the Micro Focus Web site, <http://www.microfocus.com>. If you

obtained the product from another source, such as an authorized distributor, contact them for help first. If they are unable to help, contact us.

Information We Need

However you contact us, please try to include the information below, if you have it. The more information you can give, the better Micro Focus SupportLine can help you. But if you don't know all the answers, or you think some are irrelevant to your problem, please give whatever information you have.

- The name and version number of all products that you think might be causing a problem.
- Your computer make and model.
- Your operating system version number and details of any networking software you are using.
- The amount of memory in your computer.
- The relevant page reference or section in the documentation.
- Your serial number. To find out these numbers, look in the subject line and body of your Electronic Product Delivery Notice email that you received from Micro Focus.

Contact information

Our Web site gives up-to-date details of contact numbers and addresses. Additional technical information or advice is available from several sources. The product support pages contain considerable additional information, including the WebSync service, where you can download fixes and documentation updates. To connect, enter <http://www.microfocus.com> in your browser to go to the Micro Focus home page.

If you are a Micro Focus SupportLine customer, please see your SupportLine Handbook for contact information. You can download it from our Web site or order it in printed form from your sales representative. Support from Micro Focus may be available only to customers who have maintenance agreements.

You may want to check these URLs in particular:

- <https://www.microfocus.com/product-trials/corba/index.aspx?productname=VisiBroker> (updated VisiBroker software and other files)
- <https://supportline.microfocus.com/productdoc.aspx>. (documentation updates and PDFs)

To subscribe to Micro Focus electronic newsletters, use the online form at:

<http://www.microfocus.com/Resources/Newsletters/infocus/newsletter-subscription.asp>

Generated interfaces and classes

This section describes classes generated by the VisiBroker for C++ IDL compiler, their uses, and their features.

Generated interfaces and classes overview

The VisiBroker IDL compiler generates classes that make it easier for you to develop client applications and object servers. Many of these generated classes are available for CORBA classes.

- [stub classes](#)
- [servant classes](#)
- [tie classes](#)
- [var classes](#)

<Interface_name>

The <interface_name> class is generated for a particular IDL interface and is intended for use by client applications. This class provides all of the methods defined for a particular IDL interface. When a client uses an object reference to invoke methods on the object, the stub methods are actually invoked. The stub methods allow a client operation request to be packaged, sent to the object implementation, and the results to be reflected. This entire process is transparent to the client application.

When a client uses a local object reference to invoke methods on the local object, there is no stub method involved.

Note

You should never modify the contents of a stub class generated by the IDL compiler.

<Interface_name>ObjectWrapper

This class does not apply to local interfaces. For non-local interfaces, this class is used to derive typed object wrappers and is generated for all your non-local interfaces when you invoke the `idl2cpp` command with the `-obj_wrapper` option. For more information about the `-obj_wrapper` option, see "Programmer tools for C++" in the *VisiBroker for C++ Developer's Guide*.

```
static void add(CORBA::ORB_ptr orb,
                CORBA::ObjectFactory factory,
                VISOObjectWrapper::Location loc);

static void remove(CORBA::ORB_ptr orb,
                  CORBA::ObjectFactory factory,
                  VISOObjectWrapper::Location loc);
```

Removes an un-typed object wrapper from a server application.

Parameter	Description
orb	The ORB the client wishes to use, returned by the <code>ORB_init</code> method.
factory	The factory method for the object wrapper class that you want to remove.
loc	The location of the object wrapper being removed, which should be one of the following values: <code>VISObjectWrapper::Client</code> , <code>VISObjectWrapper::Server</code> <code>VISObjectWrapper::Both</code>

POA<class_name>

The `_POA_<class_name>` class is an abstract base class generated by the IDL compiler, which is used to derive an object implementation class. Object implementations are usually derived from a servant class, which provides the necessary methods for receiving and interpreting client operation requests.

tie<class_name>

The `_tie_<class_name>` class is generated by the IDL compiler to aid in the creation of delegation implementations. The tie class allows you to create an object implementation that delegates all operation requests to another object. This allows you to use existing objects that you do not wish to inherit from the `CORBA::Object` class.

<class_name>_var

The `<class_name>_var` class is generated for an IDL interface and provides simplified memory management semantics.

Core interfaces and classes

This section describes the VisiBroker for C++ core interfaces and classes.

PortableServer::AdapterActivator

Adapter activators are associated with Portable Object Adapters (POAs). They make it possible for POAs to create child POAs under the following circumstances:

- On demand,
- As a side-effect of receiving a request which names the child POA (or one of its children), or
- When the `find_POA` method is called with an activate parameter set to TRUE.

For more information about POAs, see "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

IDL Definition

```
interface AdapterActivator {
    boolean unknown_adapter(in POA parent, in string
name);
};
```

PortableServer::AdapterActivator methods

```
CORBA::Boolean unknown_adapter(
    PortableServer::POA_ptr parent, const char* name);
```

This method is called when the VisiBroker ORB receives a request for an object reference which identifies a target POA that does not exist. The VisiBroker ORB invokes this method once for each POA that must be created in order for the POA to exist (starting with the ancestor POA closest to the root POA).

Parameter	Description
parent	The parent POA associated with the adapter activator on which the method is to be invoked.
name	The name of the POA to be created (relative to the parent).

BindOptions

Deprecated interface

This interface is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For support of the current CORBA specification, see "Client basics" in the *VisiBroker for C++ Developer's Guide*.

```
struct BindOptions
```

This structure is used to specify options to the `_bind` method, described in "Object" on page 17. Each process has a global `BindOptions` structure that is

used for all `_bind` invocations that do not specify bind options. You can modify the default bind options using the `Object::default_bind_options` method.

Bind options may also be set for a particular object and will remain in effect for the lifetime of the connection to that object.

Include file

The `corba.h` file should be included when you use this structure.

BindOptions members

`CORBA::Boolean defer_bind;`

If set to TRUE, the establishment of the connection between client and the object implementation is delayed until the first client operation is issued.

If set to FALSE, the `_bind` method should establishes the connection immediately.

`CORBA::Boolean enable_rebind;`

If set to TRUE and the connection is lost, due to a network failure or some other error, the VisiBroker ORB attempts to re-establish a connection to a suitable object implementation.

If set to FALSE, no attempt is made to reconnect the client with the object implementation.

Deprecated member

`CORBA::Long max_bind_tries;`

This member has been deprecated. It is no longer used for manipulating the interactions between the ORB and the OAD. It was used to specify the number of times to retry a bind request when the OAD is busy.

`CORBA::ULong send_timeout;`

This member specifies the maximum time in seconds that a client is to block waiting to send an operation request. If the request times out, a `CORBA::NO_RESPONSE` exception is raised and the connection to the server is destroyed.

The default value of 0 (zero) indicates that the client is to block indefinitely.

`CORBA::ULong receive_timeout;`

This member specifies the maximum time in seconds that a client is to block waiting for a response to an operation request. If the request times out, a `CORBA::NO_RESPONSE` exception is raised and the connection to the server is destroyed.

The default value of 0 (zero) indicates that the client is to block indefinitely.

`CORBA::ULong connection_timeout;`

This member specifies the maximum time in seconds that a client is to wait for a connection. If the time specified is exceeded, a `CORBA::NO_IMPLEMENT` exception is raised.

The default value of 0 indicates that the default system time-out for connections is to be used.

BOA

Deprecated interface

This class is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For support of the current CORBA specification Micro Focus recommends using POAs; see "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

```
class BOA
```

The BOA class represents the Basic Object Adaptor and provides methods for creating and manipulating objects and object references. Object servers use the BOA to activate and deactivate object implementations and to specify the thread policy they wish to use.

You do not instantiate a BOA object. Instead, you obtain a reference to a BOA object by invoking the ORB::BOA_init method.

VisiBroker provides extensions to the CORBA BOA specification which are covered in "[VisiBroker extensions to CORBA::BOA](#)". These methods provide for the management of connections, threads, and the activation of services.

Include file

Include the file **corba.h** when you use this class.

CORBA::BOA methods

```
CORBA::Object_ptr create(const CORBA::ReferenceData&
    refData, extension::CreationImplDef& creationImplDef)
```

This method registers the specified implementation with the OAD.

Parameter	Description
refData	This parameter is not used, but is provided for compliance with the CORBA specification.
creationImplDef	This pointer's true type is CreationImplDef. It provides the interface name, object name, path name of the executable and the activation policy and other parameters. See " Activation interfaces and classes " for a complete discussion of the CreationImplDef class.

```
void deactivate_impl(extension::ImplementationDef_ptr
    implDefPtr)
```

This method causes requests to the implementation to be discarded.

The method deactivates the implementation specified by `implDefPtr`. Once this method is called, no further client requests are delivered to the object within this implementation until the objects and implementation are re-activated. To cause the implementation to again accept requests, call `impl_is_ready` or `obj_is_ready`.

Parameter	Description
<code>implDefPtr</code>	This pointer's true type is CreationImplDef. It provides the interface name, object name, path name of the executable and activation policy, along with other parameters.

```
void deactivate_obj(CORBA::Object_ptr objPtr)
```

This method requests that the BOA deactivate the specified object. Once this method is invoked, the BOA does not deliver any requests to the object until `obj_is_ready` or `impl_is_ready` is invoked.

Parameter	Description
<code>objPtr</code>	A pointer to the object to be deactivated.

```
static CORBA::BOA_ptr _duplicate(CORBA::BOA_ptr ptr)
```

This static method duplicates the BOA pointer that is passed in as a parameter.

Parameter	Description
<code>ptr</code>	A BOA pointer.

```
void exit_impl_ready()
```

This method provides backward compatibility with earlier releases of VisiBroker for C++. It invokes `BOA::shutdown`, described in ["void shutdown\(\)" on page 12](#) which causes a previous invocation of the `impl_is_ready` method to return. This method cannot be invoked in the context of an active request.

```
CORBA::ReferenceData_ptr get_id(CORBA::Object_ptr objPtr)
```

This method returns the reference data for the specified object. The reference data is set by the object implementation at activation time and is guaranteed to remain constant throughout the life of the object.

Parameter	Description
<code>objPtr</code>	A pointer to the object whose reference data is to be returned.

```
CORBA::Principal_ptr get_principal(CORBA::Object_ptr objPtr, CORBA::Environment_ptr env=NULL)
```

This method returns the Principal object associated with the specified object. This method may only be called by an object implementation during the processing of a client operation request.

Parameter	Description
<code>objPtr</code>	A pointer to the object whose implementation is to be changed.
<code>env</code>	A pointer to the Environment object associated with this Principal.

```
void impl_is_ready(const char *service_name,
extension::Activator_ptr activator,
CORBA::Boolean block = 1)
```

This method instructs the BOA to delay activation of the object implementation associated with the specified `service_name` until a client requests the service. Once a client requests the service, the specified Activator object is used to activate the object implementation. If `block` is

set to 0, this method blocks the caller until the `exit_impl_ready` method is invoked.

Parameter	Description
<code>service_name</code>	The service name associated with the specified Activator object.
<code>activator</code>	The Activator to be used to activate the object implementation
<code>block</code>	If set to 1, indicates that this method should block the caller. If set to zero, the method does not block. The default behavior is to block.

```
void impl_is_ready(extension::ImplementationDef_ptr  
impl=NULL)
```

This method notifies the BOA that one or more objects in the server are ready to receive service requests. This method blocks the caller until the `exit_impl_ready` method is invoked. If all objects that the implementation offers were created through C++ instantiation and activated using the `obj_is_ready` method, do not specify the `ImplementationDef_ptr`.

An object implementation may offer only one object and may want to defer the activation of that object until a client request is received. In these cases, the object implementation does not need to first invoke the `obj_is_ready` method. Instead, it may simply invoke this method, passing the `ActivationImplDef` pointer as its single object.

Parameter	Description
<code>impl</code>	This pointer's true type is <code>ActivationImplDef</code> and provides the interface name, object name, path name of the executable and activation policy, along with other parameters.

```
static CORBA::BOA_ptr _nil()
```

This static method returns a NULL BOA pointer that can be used for initialization purposes.

```
void obj_is_ready(CORBA::Object_ptr obj,  
extension::ImplementationDef_ptr impl_ptr = NULL)
```

This method notifies the BOA that the specified object is ready for use by clients. There are two different ways to use this method:

- Objects that have been created using C++ instantiation should only specify a pointer to the object and let the `ImplementationDef_ptr` default to NULL.
- Objects whose creation is to be deferred until the first client request is received should specify a NULL `Object_ptr` and provide a pointer to an `ActivationImplDef` object that has been initialized.

Parameter	Description
<code>obj</code>	A pointer to the object to be activated.
<code>impl_ptr</code>	A optional pointer to an <code>ActivationImplDef</code> object.

```
static void CORBA::release(CORBA::BOA_ptr boa)
```

This static method releases the specified BOA pointer. Once the object's reference count reaches zero, the object is automatically deleted.

Parameter	Description
boa	A valid BOA pointer.

```
static RegistrationScope scope()
```

This static method returns the registration scope of the BOA. The registration scope of an object can be SCOPE_GLOBAL or SCOPE_LOCAL. Only objects with a global scope are registered with the osagent.

```
static void scope(RegistrationScope val)
```

This static method changes the registration scope of the BOA to the specified value.

Parameter	Description
val	The scope for this BOA. Must be one of the following values: LOCAL_SCOPE for transient objects, GLOBAL_SCOPE for objects registered with the Smart Agent.

```
void shutdown()
```

This method causes a previous invocation of the `impl_is_ready` method to return. This method cannot be invoked in the context of an active request.

```
CORBA::Object_ptr string_to_object(const char * str)
```

This method converts a stringified object reference, created with the `object_to_string` method described in “[char *object_to_string\(CORBA::Object_ptr obj\);](#)” on page 25, back into an object reference that may be used to invoke methods on the object.

Parameter	Description
str	The string to be converted back to an object reference.

Deprecated methods

```
void dispose(CORBA::Object_ptr objPtr)
```

This method unregisters the implementation of the specified object from the Object Activation Daemon. Once this method is invoked, all references to the specified object are invalid and any connections to this object implementation are broken. If the object has been allocated, it is the application's responsibility to delete the object. This method is **deprecated** since VisiBroker 4.x. We recommend that you use the [OAD](#) interface instead.

Parameter	Description
objPtr	A pointer to the object to be unregistered.

VisiBroker extensions to CORBA::BOA

CORBA::ULong **connection_max()**

This method returns the maximum number of connections allowed.

void connection_max(CORBA::ULong max_conn)

This method is used by servers to set the maximum number of connections allowed.

Parameter	Description
max_conn	The maximum number of connections allowed.

CORBA::ULong **thread_max()**

This method returns the maximum number of threads allowed if the TPool thread policy has been selected.

void thread_max(CORBA::ULong max)

This method sets the maximum number of threads allowed when the TPool thread policy has been selected. If the current number of threads exceeds this number, the extra threads are destroyed one at a time as soon as they are no longer in use until the number of threads is down to max.

Parameter	Description
max	The maximum number of threads to be allowed.

CORBA::ULong **thread_stack_size()**

Returns the maximum thread stack size (in bytes) when TPool or TSession thread policy is selected.

void thread_stack_size(CORBA::ULong size)

Sets the maximum thread stack size (in bytes) when TPool or TSession thread policy is selected.

Parameter	Description
size	The new stack size to be set.

CompletionStatus

```
enum CompletionStatus
```

This enumeration represents how an operation request completed.

IDL Definition

```
enum CompletionStatus {  
    COMPLETED_YES;  
    COMPLETED_NO;  
    COMPLETED_MAYBE;};
```

CompletionStatus members

COMPLETED_YES = 0	Indicates the operation request completed successfully.
COMPLETED_NO = 1	Indicates the operation request was not completed, due to some sort of exception or error.
COMPLETED_MAYBE = 2	Indicates that the operation request may have completed, in spite of an exception or error.

Context

```
class CORBA::Context
```

The Context class contains information about a client application's environment that is passed to a server as an implicit parameter during static or dynamic method invocations. It can be used to communicate special information that needs to be associated with a request, but is not part of the method's argument list.

The Context class consists of a list of properties, stored as name-value pairs, and provides methods for setting and manipulating those properties. A Context contains an NVList object and chains the name-value pairs together.

A Context_var class is also available and provides simpler memory management semantics.

Include file

Include the **corba.h** file when you use this class.

Context methods

```
const char *context_name() const;
```

This method returns the name used to identify this context. If no name was provided when this object was created, it returns a NULL value.

```
void create_child(const char * name, CORBA::Context_out  
context_ptr);
```

This method creates a child Context for this object.

Parameter	Description
name	The name of the new Context object.
context_ptr&	A reference to newly created child Context.

```
void delete_values(const char *name);
```

This method deletes one or more properties from this object.

Parameter	Description
name	The name of the property, or properties, to be deleted. To delete all matching properties, the name may contain a trailing "*" wildcard character. To delete all properties, specify a single asterisk.

```
static CORBA::Context_ptr _duplicate(CORBA::Context_ptr  
ctx);
```

This method duplicates the specified object.

Parameter	Description
ctx	The object to be duplicated.

```
void get_values(const char *start_scope, CORBA::Flags  
flag, const char *name, CORBA::NVList_out  
NVList_ptr);
```

This method searches the Context object hierarchy and retrieves one or more of the name/value pairs specified by the name parameter. If the name parameter has a trailing wildcard character (*), then all matching properties and their values are returned. It then creates an NVList object and places the name/value pairs in the NVList. If the name parameter is an empty string or a NULL string, the BAD_PARAM standard system exception is raised. If the name parameter is not found, the BAD_CONTEXT standard system exception is raised and no property list is returned.

The start_scope parameter specifies the name of the context where the search begins. If the property is not found, the search continues up the Context object hierarchy until a match is found, or until there are no more Context objects to search. If the start_scope parameter is omitted, the search begins with the specified context object.

Parameter	Description
start_scope	The name of the Context object at which to start the search. If set to CORBA::Context::_nil(), the search begins with the current Context. To restrict the search scope can to just the current Context, specify CORBA::CTX_RESTRICT_SCOPE.
flag	An exception is raised if no matching context name is found.
name	The property name to search for. A trailing "*" wildcard character may be used to retrieve all properties that match name.
NVList_ptr	A reference to the list of properties found.

```
static CORBA::Context_ptr _nil();
```

This method returns a NULL Context_ptr suitable for initialization purposes.

```
CORBA::Context_ptr parent();
```

This method returns a pointer to the parent Context. If there is no parent Context, a NULL value is returned.

```
static void _release(CORBA::Context_ptr ctx);
```

This static method releases the specified Context object. Once the object's reference count reaches zero, the object is automatically deleted.

Parameter	Description
ctx	The object to be released.

```
void set_one_value(const char *name, const CORBA::Any& anAny);
```

This method adds a property to this object using the specified name and value.

Parameter	Description
name	The property's name.
anAny	The property's value.

```
void set_values(CORBA::NVList_ptr list);
```

This method adds one or more properties to this object, using the name/value pairs specified in the NVList. When you create the NVList object to be used as an input parameter to this method, you must set the Flags field to zero and each Any object added to the NVList must have its TypeCode set to TC_string. For more information on the NVList class, see “[Dynamic interfaces and classes](#)”.

Parameter	Description
_list	A list of name/value pairs to be added to this object.

PortableServer::Current

```
class PortableServer::Current : public CORBA::Current
```

This class provides methods with access to the identity of the object on which the method was called. The Current class provides support for servants which implement multiple objects but can be used within the context of POA-dispatched method invocations on any servant.

IDL Definition

```
interface Current : CORBA::Current {
    exception NoContext {};
    POA get_POA() raises (NoContext);
};
```

PortableServer::Current methods

```
PortableServer::POA *get_POA();
```

This method returns a reference to the POA which implements the object in whose context it is called. If this method is called from outside the context of a POA-dispatched method, a `NoContext` exception is raised.

```
PortableServer::ObjectId get_object_id();
```

This method returns the `ObjectId` which identifies the object in whose context it was called. If this method is called from outside the context of a POA-dispatched method, a `NoContext` exception is raised.

Exception

```
class CORBA::Exception
```

The `Exception` class is the base class of the system exception and user exception classes. For more information, see “[SystemException](#)” on page 45.

Include file

You should include the `corba.h` file when using this class.

Object

```
class CORBA::Object
```

All ORB objects are derived from the `Object` class, which provides methods for binding clients to objects and manipulating object references as well as querying and setting an object's state. `Object` class methods are implemented by the ORB.

VisiBroker for C++ provides extensions to the CORBA Object specification. These are covered in “[VisiBroker extensions to CORBA::Object](#)” on page 20.

Include file

You should include the file `corba.h` when using this class.

CORBA::Object methods

```
void _create_request(CORBA::Context_ptr ctx, const char
    *operation, CORBA::NVList_ptr arg_list,
    CORBA::NamedValue_ptr result, CORBA::Request_out
    request, CORBA::Flags req_flags);
```

This method creates a Request for an object implementation that is suitable for invocation with the Dynamic Invocation Interface.

Parameter	Description
ctx	The Context associated with this request. For more information, see "CompletionStatus" on page 14 .
operation	The name of the operation to be performed on the object implementation.
arg_list	A list of arguments to pass to the object implementation. See "Dynamic interfaces and classes" for more information.
result	The result of the operation. See "Dynamic interfaces and classes" for more information.
request	A pointer to the Request that is created. For more information, see "Dynamic interfaces and classes" .
req_flags	This flag must be set to OUT_LIST_MEMORY if one or more of the NamedValue items in arg_list are output arguments.

```
void _create_request(
    CORBA::Context_ptr ctx,
    const char *operation,
    CORBA::NVList_ptr arg_list,
    CORBA::NamedValue_ptr result,
    CORBA::ExceptionList_ptr eList,
    CORBA::ContextList_ptr ctxList,
    CORBA::Request_out request,
    CORBA::Flags req_flags);
```

This method creates a Request for an object implementation that is suitable for invocation with the Dynamic Invocation Interface.

Parameter	Description
ctx	The Context associated with this request. For more information, see "CompletionStatus" on page 14 .
operation	The name of the operation to be performed on the object implementation.
arg_list	A list of arguments to pass to the object implementation. See "Dynamic interfaces and classes" for more information.
result	The result of the operation. See the "Dynamic interfaces and classes" for more information.
eList	A list of exceptions for this request.
ctxList	A list of Context objects for this request.
request	A pointer to the Request that is created. See "Dynamic interfaces and classes" for more information.
req_flags	This flag must be set to OUT_LIST_MEMORY if one or more of the NamedValue items in arg_list are output arguments.

```
static CORBA::Object_ptr _duplicate(CORBA::Object_ptr  
    obj);
```

This static method duplicates the specified Object_ptr and returns a pointer to the object. The object's reference count is increased by one.

Parameter	Description
obj	The object pointer to be duplicated.

```
CORBA::InterfaceDef_ptr _get_interface();
```

This method returns a pointer to this object's interface definition. See "["Interface repository interfaces and classes \(C++\)"](#)" for more information.

```
CORBA::ULong _hash(CORBA::ULong maximum);
```

This method returns a hash value for this object. This value does change for the lifetime of this object, however the value is not necessarily unique. If two objects return different hash values, then they are not identical. The upper bound of the hash value may be specified. The lower bound is 0 (zero).

Parameter	Description
maximum	The upper bound of the hash value returned.

```
CORBA::Boolean _is_a(const char *logical_type_id);
```

This method returns TRUE if this object implements the interface associated with the repository id. Otherwise, it returns FALSE.

Parameter	Description
logical_type_id	The repository identifier to check.

```
CORBA::Boolean _is_equivalent(CORBA::Object_ptr  
    other_object);
```

This method returns TRUE if the specified object pointer and this object point to the same object implementation. Otherwise, it returns FALSE.

Parameter	Description
other_object	Pointer to an object that is to be compared to this object.

```
static CORBA::Object_ptr _nil();
```

This static method returns a NULL pointer suitable for initialization purposes.

```
CORBA::Boolean _non_existent();
```

This method returns TRUE if the object represented by this object reference no longer exists.

```
CORBA::Request_ptr _request(const char* operation);
```

This method creates a Request suitable for invoking methods on this object. A pointer to the Request object is returned. See "["Dynamic interfaces and classes"](#)" for more information.

Parameter	Description
operation	The name of the object method to be invoked.

```
CORBA::Object_ptr _resolve_reference(const char* id);
```

Your client application can invoke this method on an object reference to resolve the server-side interface with the specified service identifier. This method causes the ORB::_resolve_initial_references method to be invoked on the server-side to resolve the specified service. This method returns an object reference which your client can narrow to the appropriate server type.

This method is typically used by client applications that wish to manage a server's attributes.

Parameter	Description
id	The name of the interface to be resolved on the server-side.

VisiBroker extensions to CORBA::Object

```
CORBA::BindOptions* _bind_options();
```

This method returns a pointer to the bind options that used for this object only. For more information, see "["BindOptions" on page 7](#).

```
void _bind_options(const CORBA::BindOptions& opt);
```

This method sets the bind options for this object only. The options that are set remain in effect for the lifetime of the proxy object. Any changes to time-out values will apply to all subsequent send and receive operations as well as any re-bind operations. For more information, see "["BindOptions" on page 7](#).

Parameter	Description
opt	The new bind options for this object.

```
static CORBA::Object_ptr _bind_to_object(
    const char *rep_id,
    const char *object_name=NULL,
    const char *host_name=NULL,
    const CORBA::BindOptions *options=NULL,
    CORBA::ORB_ptr orb=NULL);
```

This method attempts to bind to the object with the specified repository_id and object_name on the specified host using the specified BindOptions and ORB.

Parameter	Description
rep_id	The repository ID of the desired object.
object_name	The name of the desired object.
host_name	The name of the desired host where the object implementation is executing.
options	The bind options for this connection. See " "BindOptions" on page 7 for more information.
orb	The ORB to use.

Deprecated method

```
CORBA::BOA _boa() const;
```

This method is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using

the BOA with VisiBroker" in the ***VisiBroker for C++ Developer's Guide***. For current CORBA specification support, Micro Focus recommends using POAs rather than BOAs. See "Using POAs" in the ***VisiBroker for C++ Developer's Guide***.

The method returns a pointer to the Basic Object Adaptor with which this object is registered.

```
static CORBA::Object_ptr _clone(
    CORBA::Object_ptr obj,
    CORBA::Boolean reset_connection = 1UL);
```

This method clones the specified object reference.

Parameter	Description
obj	The object reference to be cloned.
reset_connection	This parameter is not used.

```
static const CORBA::BindOptions*
*_default_bind_options();
```

This method returns a pointer to the global, per client process BindOptions. For more information, see "["BindOptions" on page 7](#)".

```
static void _default_bind_options(
    const CORBA::BindOptions& bindOptions);
```

This method sets the bind options to be used by default for all _bind invocations that do not specify their own bind options. For more information, see "["BindOptions" on page 7](#)".

```
static const CORBA::TypeInfo * _desc();
```

Returns type information for this object.

```
const char *_interface_name() const;
```

This method returns this object's interface name.

```
CORBA::Boolean _is_bound() const;
```

This method returns FALSE if the client process has established a connection to an object implementation.

```
CORBA::Boolean _is_local() const;
```

This method returns TRUE if the object implementation resides within the same process or address space as the client application.

```
CORBA::Boolean _is_persistent() const;
```

This method returns TRUE if this object is a persistent object. A FALSE value returned is not an authoritative answer that the object is not persistent.

```
CORBA::Boolean _is_remote() const;
```

This method returns TRUE if the object implementation resides in a different process or address space than the client application. The client and object implementation may or may not reside on the same host.

```
const char *_object_name() const;
```

This method returns the object name associated with this object.

```
CORBA::Long _ref_count() const;
>Returns the reference count for this object.

void _release();
Decrements this object's reference count and releases the object if the
reference count has reached 0.

const char *_repository_id() const;
>This method returns this object's repository identifier.
```

ORB

```
class CORBA::ORB
```

The ORB class provides an interface to the Object Request Broker. It provides methods to the client object, independent of the particular Object or Object Adaptor.

VisiBroker provides extensions to the CORBA ORB that are discussed in [“VisiBroker extensions to CORBA::ORB” on page 28](#). These methods are provided for the management of connections, threads, and the activation of services.

Include file

You should include the file **corba.h** when using this class.

CORBA::ORB methods

```
CORBA::Boolean work_pending();
```

This method returns true if the ORB has any work waiting to be processed.

```
static CORBA::TypeCode_ptr create_alias_tc(
    const char *repository_id,
    const char *type_name,
    CORBA::TypeCode_ptr original_type);
```

This static method dynamically creates a TypeCode for the alias with the specified type and name.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the alias's type.
original_type	The type of the original for which this alias is being created.

```
static CORBA::TypeCode_ptr create_array_tc(CORBA::Ulong
    length, TypeCode_ptr element_type);
```

This static method dynamically creates a TypeCode for an array.

Parameter	Description
length	The maximum number of array elements.
element_type	The type of elements stored in this array.

```
static CORBA::TypeCode_ptr create_enum_tc(const char
    *repository_id, const char *type_name, const
    CORBA::EnummemberSeq& members);
```

This static method dynamically creates a TypeCode for an enumeration with the specified type and members.

Parameter	Description
<code>repository_id</code>	The identifier generated by the IDL compiler or constructed dynamically.
<code>type_name</code>	The name of the enumeration's type.
<code>members</code>	A list of values for the enumeration's members.

```
void create_environment(CORBA::Environment_out env);
```

This method creates an Environment object.

Parameter	Description
<code>env</code>	The reference that will be set to point to the newly created Environment.

```
static CORBA::TypeCode_ptr create_exception_tc(  

    const char *repository_id,  

    const char *type_name,  

    const CORBA::StructMemberSeq& members);
```

This static method dynamically creates a TypeCode for an exception with the specified type and members.

Parameter	Description
<code>repository_id</code>	The identifier generated by the IDL compiler or constructed dynamically.
<code>type_name</code>	The name of the structure's type.
<code>members</code>	A list of values for the structure members.

```
static CORBA::TypeCode_ptr create_interface_tc(  

    const char *repository_id, const char *type_name);
```

This static method dynamically creates a TypeCode for the interface with the specified type.

Parameter	Description
<code>repository_id</code>	The identifier generated by the IDL compiler or constructed dynamically.
<code>type_name</code>	The name of the interface's type.

```
void create_list(  

    CORBA::Long num, CORBA::NVList_out nvList);
```

This method creates an NVList with the specified number of elements and returns a reference to the list.

Parameter	Description
<code>num</code>	The number of elements in the list.
<code>nvlist</code>	Initialized to point to the newly created list.

```
void create_named_value(CORBA::NamedValue_out value);
```

This method creates a NamedValue object.

```
void create_operation_list(CORBA::OperationDef_ptr  
    opDefPtr, CORBA::NVList_out nvList);
```

This method creates an argument list for the specified OperationDef object.

```
static CORBA::TypeCode_ptr  
    create_recursive_sequence_tc(CORBA::Ulong bound,  
    CORBA::Ulong offset);
```

This static method dynamically creates a TypeCode for a recursive sequence. The result of this method can be used to create other types. The offset parameter determines which enclosing TypeCode describes the elements of this sequence.

Parameter	Description
-----------	-------------

bound	The maximum number of sequence elements.
offset	Position within the buffer where the type code for the current element was previously generated.

```
static CORBA::TypeCode_ptr  
    create_sequence_tc(CORBA::Ulong bound,  
    CORBA::TypeCode_ptr element_type);
```

This static method dynamically creates a TypeCode for a sequence.

Parameter	Description
-----------	-------------

bound	The maximum number of sequence elements.
element_type	The type of elements stored in this sequence.

```
static CORBA::TypeCode_ptr  
    create_string_tc(CORBA::Ulong bound);
```

This static method dynamically creates a TypeCode for a string.

Parameter	Description
-----------	-------------

bound	The maximum length of the string.
-------	-----------------------------------

```
static CORBA::TypeCode_ptr create_struct_tc(  
    const char *repository_id, const char *type_name,  
    const CORBA::StructMemberSeq& members);
```

This static method dynamically creates a TypeCode for the structure with the specified type and members.

Parameter	Description
-----------	-------------

repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the structure's type.
members	A list of values for the structure members.

```
static CORBA::TypeCode_ptr create_union_tc(  
    const char *repository_id,  
    const char *type_name,
```

```
CORBA::TypeCode_ptr discriminator_type,
const CORBA::UnionMemberSeq& members);
```

This static method dynamically creates a TypeCode for a union with the specified type, discriminator and members.

Parameter	Description
repository_id	The identifier generated by the IDL compiler or constructed dynamically.
type_name	The name of the union's type.
discriminator_typ	The discriminating type for the union.
members	A list of values for the union members.

```
CORBA::Status get_default_context(  
    CORBA::Context_ptr& contextPtr);
```

This method returns the default per-process Context maintained by VisiBroker. The default Context is often used in constructing DII requests. For more information, go to ["Context" on page 14](#).

Parameter	Description
contextPtr&	The property's value.

```
CORBA::Status get_next_response(CORBA::Request_out*&  
    req);
```

This method blocks waiting for the response associated with a deferred request. You can use the ORB::poll_next_response method to determine if there is a response waiting to be received before you call this method.

Parameter	Description
req	Set to point to the request that has been received.

```
ObjectIDList *list_initial_services();
```

This method returns a list of the names of any object services that are available to your application. These services may include the Location Service, Interface Repository, Name Service, or Event Service. You can use any of the returned names with the ORB::resolve_initial_references method to obtain the top-level object for that service.

```
char *object_to_string(CORBA::Object_ptr obj);
```

This method converts the specified object reference to a string, a process referred to as "stringification" in the CORBA specification. Object references that have been converted to strings can be stored in files, for example. This is an ORB method because different ORB implementations may have different conventions for representing object references as strings.

Deprecated method

```
CORBA::BOA_ptr ORB::BOA_init(  
    int& argc, char *const *argv,  
    const char *boa_identifier = (char *)NULL);
```

This method is deprecated as of VisiBroker 4.x. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the **VisiBroker for C++ Developer's Guide**. For current CORBA specification support, Micro Focus recommend

using POAs. See "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

This ORB method returns a handle to the BOA and specifies optional networking parameters. The `argc` and `argv` parameters are the same parameters passed to the object implementation process when it is started.

Parameter	Description
<code>argc</code>	The number of arguments passed.
<code>argv</code>	An array of char pointers to the arguments. All but two of the arguments take the form of a keyword and a value. This method ignores any keywords that it does not recognize.
<code>boa_identifier</code>	Identifies the type of BOA to be used. Use <code>TPool</code> if multiple thread support is desired. Use <code>TSingle</code> if the implementation does not use threads.

```
static CORBA::ORB_ptr ORB_init(int& argc, char *const *argv, const char *orb_id = NULL);
```

This method initializes the ORB and is used by both clients and object implementations. It returns a pointer to the ORB that can be used to invoke ORB methods. The `argc` and `argv` parameters passed to the application's main function can be passed directly to this method. Arguments accepted by this method take the form of name-value pairs so that they can be distinguished from other command line arguments.

Parameter	Description
<code>argc</code>	The number of arguments passed.
<code>argv</code>	An array of char pointers to the arguments. All but two of the arguments take the form of a keyword and a value. This method ignores any keywords that it does not recognize.
<code>boa_identifier</code>	Identifies the type of ORB to be used. The default is IIOP.

```
void perform_work();
```

This method instructs the ORB to perform some work.

```
CORBA::Boolean poll_next_response();
```

This method returns TRUE if a response to a deferred request was received, otherwise FALSE is returned. This call does not block.

```
CORBA::Object_ptr resolve_initial_references(const char * identifier);
```

This method resolves one of the names returned by the `ORB::list_initial_services` method, described in "[ObjectList *list_initial_services\(\)](#)," on page 25, to its corresponding implementation object. The resolved object which is returned can then be narrowed to the appropriate server type. If the specified service cannot be found, an `InvalidName` exception is raised.

Parameter	Description
<code>identifier</code>	The name of the service whose top-level object is to be returned. The identifier is not the name of the object to be returned.

```
void register_initial_reference (const char *
    identifier, CORBA::Object_ptr obj);
```

This method registers the name to its corresponding implementation object. The corresponding object id could now be resolved using an object URL format such as corbaloc. An `InvalidName` exception is raised if the identifier is empty or is already registered.

Parameter	Description
identifier	The name of the service by which the initial reference will be known.
obj	A non-null object reference.

```
void send_multiple_requests_deferred(const
    CORBA::RequestSeq& req);
```

This method sends all the client requests in the specified sequence as deferred requests. The ORB will not wait for any responses from the object implementation. The client application is responsible for retrieving the responses to each request using the `ORB::get_next_response` method.

Parameter	Description
req	A sequence of deferred requests to be sent.

```
void send_multiple_requests_oneway(const
    CORBA::RequestSeq& req);
```

This method sends all the client requests in the specified sequence as one-way requests. The ORB does not wait for a response from any of the requests because one-way requests do not generate responses from the object implementation.

Parameter	Description
req	A sequence of one-way requests to be sent.

```
CORBA::Object_ptr string_to_object(const char *str);
```

This method converts a string representing an object into an object pointer. The string must have been created using the `ORB::object_to_string` method.

Parameter	Description
str	A pointer to a string representing an object.

```
static CORBA::ORB_ptr _duplicate(CORBA::ORB_ptr ptr);
```

This static method duplicates the specified ORB pointer and returns a pointer to the duplicated ORB.

Parameter	Description
ptr	The ORB pointer to be duplicated.

```
static CORBA::ORB_ptr _nil();
```

This static method returns a NULL ORB pointer suitable for initialization purposes.

```
void run() ;
```

This method causes the ORB to start processing work. This ORB receives requests and dispatches them. This call blocks this process until the ORB is shut down.

```
static void shutdown(CORBA::Boolean  
    wait_for_completion=0) ;
```

This method causes a previous invocation of the `impl_is_ready` method to return. All object adapters are shut down and associated memory is freed. If the `wait_for_completion` parameter is TRUE, this operation blocks until the shutdown is complete. If an application does this in a thread that is currently servicing an invocation, the `BAD_INV_ORDER` system exception is raised. If the `wait_for_completion` parameter is FALSE, then shutdown may not have completed upon return.

Parameter	Description
<code>wait_for_completion</code>	Specifies whether shutdown will wait for completion or not

```
static void destroy() ;
```

This operation destroys the ORB so that its resources can be reclaimed by the application. If `destroy` is called on an ORB that has not been shut down, it will start the shut down process and block until the ORB has shut down before it destroys the ORB. The behavior is similar to that achieved by calling `shutdown` with the `wait_for_completion` parameter set to TRUE. If an application calls `destroy` in a thread that is currently servicing an invocation, the `BAD_INV_ORDER` system exception is raised.

VisiBroker extensions to CORBA::ORB

```
CORBA::Object_ptr bind(  
    const char *rep_id,  
    const char *object_name =  
        (const char*)NULL, const char *host_name =  
            (const char*)NULL, CORBA::BindOptions *opt =  
                (CORBA::BindOptions*)NULL);
```

This method allows you obtain a generic object reference to an object by specifying the repository id of the object and optionally, its object name and host name where it is implemented.

Parameter	Description
<code>rep_id</code>	The identifier generated by the IDL compiler or constructed dynamically for the object.
<code>object_name</code>	The name of the object. This is an optional parameter.
<code>host_name</code>	The host name where the object implementation is located. This may be specified as an IP address or as a fully qualified host name. This is an optional parameter.
<code>opt</code>	Any bind options for the object. This is an optional parameter. Bind options are described in "BindOptions" on page 7 .

```
CORBA::ULong connection_count()
```

This method is used by client applications to return the current number of active connections.

```
void connection_max(CORBA::ULong max_conn)
```

Client applications use this method to set the maximum number of connections allowed.

Parameter	Description
max_conn	The maximum number of connections to be allowed.

```
CORBA::ULong connection_max()
```

Client applications use this method to obtain the maximum number of connections allowed.

```
static CORBA::TypeCode_ptr create_wstring_tc(  
    CORBA::Ulong bound) ;
```

This static method dynamically creates a TypeCode for a Unicode string.

Parameter	Description
bound	The maximum length of the string.

PortableServer::POA

```
class PortableServer::POA
```

Objects of the POA class manage the implementations of a collection of objects. The POA supports a namespace for these objects which are identified by Object Ids. A POA also provides a namespace for other POAs in that a POA must be created as a child of an existing POA, which then forms a hierarchy starting with the root POA.

A POA object must not be exported to other processes or be stringified. A MARSHAL exception is raised if this is attempted.

PortableServer::POA methods

```
PortableServer::ObjectId* activate_object(  
    PortableServer::Servant _p_servant) ;
```

This method generates an object id and returns it. The object id and the specified _p_servant are entered into the Active Object Map. If the UNIQUE_ID policy is present with the POA and the specified _p_servant is already in the Active Object Map, then a ServantAlreadyActive exception is raised.

This method requires that the SYSTEM_ID and RETAIN policies be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
_p_servant	The Servant to be entered into the Active Object Map.

```

void activate_object_with_id(
    const PortableServer::ObjectId& _oid,
    PortableServer::Servant _p_servant);

```

This method attempts to activate the specified `_oid` and to associate it with the specified `_p_servant` in the Active Object Map. If the `_oid` already has a servant bound to it in the Active Object Map, then an `ObjectAlreadyActive` exception is raised. If the POA has the `UNIQUE_ID` policy present and the `_p_servant` is already in the Active Object map, then a `ServantAlreadyActive` exception is raised.

If the POA has the `SYSTEM_ID` policy present and it detects that the `_oid` was not generated by the system or for the POA, then this method raises a `BAD_PARAM` system exception.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_oid</code>	The ObjectId of the object to be activated.
<code>_p_servant</code>	The Servant to be entered into the Active Object Map.

```

PortableServer::ImplicitActivationPolicy_ptr
create_implicit_activation_policy(
    PortableServer::ImplicitActivationPolicyValue _value);

```

This method returns a pointer to an `ImplicitActivationPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after the `Policy` object is no longer needed.

If no `ImplicitActivationPolicy` is specified at POA creation, then the default is `NO_IMPLICIT_ACTIVATION`.

Parameter	Description
<code>_value</code>	If set to <code>IMPLICIT_ACTIVATION</code> , the POA implicitly activates servants: also requires <code>SYSTEM_ID</code> and <code>RETAIN</code> policies. If set to <code>NO_IMPLICIT_ACTIVATION</code> , the POA will not implicitly activate servants.

```
CORBA::Object_ptr create_reference(const char* _intf);
```

This method creates and returns an object reference that encapsulates a POA-generated `ObjectId` and the specified `_intf` values. The `_intf`, which may be null, becomes the `type_id` of the generated object reference. This method does not cause an activation to take place. Undefined behavior results if the `_intf` value does not identify the most derived interface of the object or one of its base interfaces. The `ObjectId` may be obtained by invoking the `POA::reference_to_id` method on the returned Object.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_intf</code>	The repository interface id of the class of the object to be created.

```
CORBA::Object_ptr create_reference_with_id (
    const PortableServer::ObjectId& _oid, const char* _intf);
```

This method creates and returns an object reference that encapsulates the specified `_oid` and `_intf` values. The `_intf`, which may be a null string, becomes the `type_id` of the generated object reference. An `_intf` value that does not identify the most derived interface of the object or one of its base interfaces will result in undefined behavior. This method does not cause an activation to take place. The returned object reference may be passed to clients, so that subsequent requests on those references will cause the object to be activated if necessary, or the default servant used, depending on the applicable policies.

If the POA has the `SYSTEM_ID` policy present and it detects the `ObjectId` value was not generated by the system or for the POA, this method may raise a `BAD_PARAM` system exception.

Parameter	Description
<code>_oid</code>	The object id for which a reference is to be created.
<code>_intf</code>	The repository interface id of the class of the object to be created.

```
PortableServer::IdAssignmentPolicy_ptr
create_id_assignment_policy (
    PortableServer::IdAssignmentPolicyValue _value);
```

This method returns a pointer to an `IdAssignmentPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no `IdAssignmentPolicy` is specified at POA creation, then the default is `SYSTEM_ID`.

Parameter	Description
<code>_value</code>	If set to <code>USER_ID</code> , then objects created by the POA are assigned object ids only by the application. If set to <code>SYSTEM_ID</code> , then objects created by the POA are assigned object ids only by the POA.

```
PortableServer::IdUniquenessPolicy_ptr
create_id_uniqueness_policy (
    PortableServer::IdUniquenessPolicyValue _value);
```

This method returns a pointer to an `IdUniquenessPolicy` object with the specified `_value`. The application is responsible for calling the inherited `destroy` method on the `Policy` object after it is no longer needed.

If no `IdUniquenessPolicy` is specified at POA creation, then the default is `UNIQUE_ID`.

Parameter	Description
<code>_value</code>	If set to <code>UNIQUE_ID</code> , then servants which are activated with the POA support exactly one object id. If set to <code>MULTIPLE_ID</code> , then a servant which is activated with the POA may support one or more object ids.

```

PortableServer::LifespanPolicy_ptr
  create_lifespan_policy (
    PortableServer::LifespanPolicyValue _value);

```

This method returns a pointer to a LifespanPolicy object with the specified **_value**. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no LifespanPolicy is specified at POA creation, then the default is TRANSIENT.

Parameter	Description
_value	If set to TRANSIENT, then objects implemented in the POA cannot outlive the POA instance in which they were first created. Once a transient POA is deactivated, the use of any object references generated from it results in an OBJECT_NOT_EXIST exception being raised. If set to PERSISTENT, then the objects implemented in the POA can outlive any process in which they are first created.

```

PortableServer::POA_ptr create_POA(
  const char* _adapter_name,
  PortableServer::POAManager_ptr _a_POAManager,
  const CORBA::PolicyList& _policies);

```

This method creates a new POA with the specified **_adapter_name**. The new POA is a child of the specified **_a_POAManager**. If a child POA with the same name already exists for the parent POA, a PortableServer::AdapterAlreadyExists exception is raised.

The specified **_policies** are associated with the new POA and are used to control its behavior.

Parameter	Description
_adapter_name	The name which specifies the new POA.
_a_POAManager	The parent POA object of the new POA.
_policies	A list of policies which are to apply to the new POA.

```

PortableServer::RequestProcessingPolicy_ptr
  create_request_processing_policy (
    PortableServer::RequestProcessingPolicyValue _value);

```

This method returns a pointer to a RequestProcessingPolicy object with the specified **_value**. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no RequestProcessingPolicy is specified at POA creation, then the default is USE_ACTIVE_OBJECT_MAP_ONLY.

Parameter	Description
_value	If set to USE_ACTIVE_OBJECT_MAP_ONLY and the object id is not found in the Active Object Map, then an OBJECT_NOT_EXIST exception is returned to the client. (The RETAIN policy is also required.) If set to USE_DEFAULT_SERVANT and the object id is not found in the Active Object Map or the NON_RETAIN policy is present, and a default servant has been registered with the POA using the set_servant method, then the request is dispatched to the default servant. If no default servant has been registered, then an OBJ_ADAPTER exception is returned to the client. (The MULTIPLE_ID policy is also required.) If set to USE_SERVANT_MANAGER and the object id is not found in the Active Object Map or the NON_RETAIN policy is present, and a servant manager has been registered with the POA using the set_servant_manager method, then the servant manager is given the opportunity to locate a servant or raise an exception. If no servant manager has been registered, then an OBJ_ADAPTER is returned to the client.

```
PortableServer::ServantRetentionPolicy_ptr
create_servant_retention_policy (
    PortableServer::ServantRetentionPolicyValue _value);
```

This method returns a pointer to a ServantRetentionPolicy object with the specified _value. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no ServantRetentionPolicy is specified at POA creation, then the default is RETAIN.

Parameter	Description
_value	If set to RETAIN, then the POA will retain active servants in its Active Object Map. If set to NON_RETAIN, then servants are not retained by the POA.

```
PortableServer::ThreadPolicy_ptr create_thread_policy (
    PortableServer::ThreadPolicyValue _value);
```

This method returns a pointer to a ThreadPolicy object with the specified _value. The application is responsible for calling the inherited destroy method on the Policy object after it is no longer needed.

If no ThreadPolicy is specified at POA creation, then the default is ORB_CTRL_MODEL.

Parameter	Description
_value	If set to ORB_CTRL_MODEL, the ORB is responsible for assigning requests for an ORB-controlled POA to threads. In a multi-threaded environment, concurrent requests may be delivered using multiple threads. If set to SINGLE_THREAD_MODEL, then requests to the POA are processed sequentially. In a multi-threaded environment, all upcalls made by the POA to servants and servant managers are made in a manner that is safe for code that is multi-thread unaware.

```
void deactivate_object(const PortableServer::ObjectId&
    _oid);
```

This method causes the specified `_oid` to be deactivated. An `ObjectId` which has been deactivated continues to process requests until there are no more active requests for that `ObjectId`. An `ObjectId` is removed from the Active Object Map when all requests executing for that `ObjectId` have completed.

If a `ServantManager` is associated with the POA, then the `ServantActivator::etherealize` method is invoked with the `ObjectId` and the associated servant after the `ObjectId` has been removed from the Active Object map. Reactivization for the `ObjectId` blocks until `etherealization`, if necessary, has completed. However, the method does not wait for requests or `etherealization` to complete and always returns immediately after deactivating the specified `_oid`.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_oid</code>	The <code>ObjectId</code> of the object to be deactivated.

```
void destroy(
    CORBA::Boolean _etherealize_objects,
    CORBA::Boolean _wait_for_completion);
```

This method destroys this POA object and all of its descendant POAs. First the children are destroyed and finally the current container POA. If desired, later, a POA with that same name in the same process can be created.

Parameter	Description
<code>_etherealize_objects</code>	If TRUE, the POA has the <code>RETAIN</code> policy, and a servant manager has registered with the POA, then the <code>etherealize</code> method is called on each active object in the Active Object Map. The apparent destruction of the POA occurs before the <code>etherealize</code> method is called, and thus any <code>etherealize</code> method which attempts to invoke methods on the POA raises an <code>OBJECT_NOT_EXIST</code> exception.
<code>_wait_for_completion</code>	If TRUE and the current thread is not in an invocation context dispatched from some POA belonging to the same ORB as this POA, the <code>destroy</code> method only returns after all active requests and all invocations of <code>etherealize</code> have completed. If FALSE and the current thread is in an invocation context dispatched from some POA belonging to the same ORB as this POA, the <code>BAD_INV_ORDER</code> exception is raised and POA destruction does not occur.

```
PortableServer::POA_ptr find_POA(
    const char* _adapter_name, CORBA::Boolean
    _activate_it);
```

If the POA object on which this method is called is the parent of the POA with the specified `_adapter_name`, the child POA is returned.

Parameter	Description
<code>_adapter_name</code>	The name of the AdapterActivator associated with the POA.
<code>_activate_it</code>	If set to TRUE and no child POA of the POA specified by <code>_adapter_name</code> exists, then the POA's AdapterActivator, if not null, is invoked. If it successfully activates the child POA, then that POA is returned. Otherwise an <code>AdapterNonExistent</code> exception is raised.

```
PortableServer::Servant get_servant();
```

This method returns the default Servant associated with the POA. If no Servant has been associated with the POA, then a `NoServant` exception is raised.

This method requires that the `USE_DEFAULT_SERVANT` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

```
PortableServer::ServantManager_ptr
get_servant_manager();
```

This method returns a pointer to the ServantManager object associated with the POA. The result is null if no ServantManager is associated with the POA.

This method requires that the `USE_SERVANT_MANAGER` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

```
CORBA::Object_ptr
id_to_reference(PortableServer::ObjectId& _oid);
```

This method returns an object reference if the specified `_oid` value is currently active. If the `_oid` is not active, then an `ObjectNotActive` exception is raised.

This method requires that the `RETAIN` policy be present with the POA; otherwise, a `WrongPolicy` exception is raised.

Parameter	Description
<code>_oid</code>	The ObjectId of the object for which a reference is to be returned.

```
PortableServer::Servant
id_to_servant(PortableServer::ObjectId& _oid);
```

This method has three behaviors:

- If the POA has the `RETAIN` policy present and the specified `_oid` is in the Active Object Map, then it returns the servant associated with that object in the Active Object Map.
- If the POA has the `USE_DEFAULT_SERVANT` policy present and a default servant has been registered with the POA, it returns the default servant.
- Otherwise, an `ObjectNotActive` exception is raised.

This method requires that the USE_DEFAULT_SERVANT policy be present with the POA; if neither policy is present, a WrongPolicy exception is raised.

Parameter	Description
_oid	The ObjectId of the object for which a servant is to be returned.

```
PortableServer::Servant
reference_to_servant(CORBA::Object_ptr _reference);
```

This method has three behaviors:

- If the POA has the RETAIN policy and the specified `_reference` is present in the Active Object Map, then it returns the servant associated with that object in the Active Object Map.
- If the POA has the USE_DEFAULT_SERVANT policy present and a default servant has been registered with the POA, then it returns the default servant.
- Otherwise, it raises an `ObjectNotActive` exception.

This method requires that the RETAIN or USE_DEFAULT_SERVANT policies be present; otherwise, a WrongPolicy exception is raised.

Parameter	Description
<code>_reference</code>	The object for which a servant is to be returned.

```
PortableServer::ObjectId*
reference_to_id(CORBA::Object_ptr _reference);
```

This method returns the `ObjectId` value encapsulated by the specified `_reference`. The invocation is valid only if the `_reference` was created by the POA on which the method is called. If the `_reference` was not created by the POA, a `WrongAdapter` exception is raised. The object denoted by the `_reference` parameter does not have to be active for this method to succeed.

Though the IDL specifies that a `WrongPolicy` exception may be raised by this method, it is simply declared for possible future extension.

Parameter	Description
<code>_reference</code>	The object for which an <code>ObjectId</code> is to be returned.

```
PortableServer::ObjectId* servant_to_id(
    PortableServer::Servant _p_servant);
```

This method has four possible behaviors:

- If the POA has the UNIQUE_ID policy present and the specified `_p_servant` is active, then the `ObjectId` associated with the `_p_servant` is returned.
- If the POA has the IMPLICIT_ACTIVATION policy present and either the POA has the MULTIPLE_ID policy present or the specified `_p_servant` is not active, then the `_p_servant` is activated using the POA-generated `ObjectId` and the repository interface id associated with the `_p_servant`, and that `ObjectId` is returned.

- If the POA has the USE_DEFAULT_SERVANT policy present, the specified _p_servant is the default servant, then the ObjectId associated with the current invocation is returned.
- Otherwise, a ServantNotActive exception is raised.

This method requires that the USE_DEFAULT_SERVANT policy or a combination of the RETAIN policy and either the UNIQUE_ID or IMPLICIT_ACTIVATION policies be present; otherwise, a WrongPolicy exception is raised.

Parameter	Description
_p_servant	The Servant for which the ObjectId to be returned is desired.

```
CORBA::Object_ptr
servant_to_reference(PortableServer::Servant
_p_servant);
```

This method has the following possible behaviors:

- If the POA has both the RETAIN and the UNIQUE_ID policies present and the specified _p_servant is active, then an object reference encapsulating the information used to activate the servant is returned.
- If the POA has both the RETAIN and the IMPLICIT_ACTIVATION policies present and either the POA has the MULTIPLE_ID policy or the specified _p_servant is not active, then the _p_servant is activated using a POA-generated ObjectId and repository interface id associated with the _p_servant, and a corresponding object reference is returned.
- If this method was invoked in the context of executing a request on the specified _p_servant, the reference associated with the current invocation is returned.
- Otherwise, a ServantNotActive exception is raised.

This method requires the presence of the RETAIN policy and either the UNIQUE_ID or IMPLICIT_ACTIVATION policies if invoked outside the context of a method dispatched by the POA. If this method is not invoked in the context of executing a request on the specified _p_servant and one of these policies is not present, then a WrongPolicy exception is raised.

Parameter	Description
_p_servant	The Servant for which a reference is to be returned.

```
void set_servant(PortableServer::Servant _p_servant);
```

This method sets the default Servant associated with the POA. The specified Servant will be used for all requests for which no servant is found in the Active Object Map.

This method requires that the USE_DEFAULT_SERVANT policy be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
_p_servant	The Servant to be used as the default associated with the POA.

```
void set_servant_manager
    (PortableServer::ServantManager_ptr _imagr);
```

This method sets the default ServantManager associated with the POA. This method may only be invoked after a POA has been created. Attempting to set the ServantManager after one has already been set raises a BAD_INV_ORDER exception.

This method requires that the USE_SERVANT_MANAGER policy be present with the POA; otherwise, a WrongPolicy exception is raised.

Parameter	Description
<code>_imagr</code>	The ServantManager to be used as the default used with the POA.

```
PortableServer::AdapterActivator_ptr the_activator();
```

This method returns the AdapterActivator associated with the POA. When a POA is created, it does not have an AdapterActivator (i.e., the attribute is null). It is system dependent whether a root POA has an activator and the application can assign one as it wishes.

```
void the_activator(PortableServer::AdapterActivator_ptr
    _val);
```

This method sets the AdapterActivator object associated with the POA to the one specified.

Parameter	Description
<code>_val</code>	The ActivatorAdapter to be associated with the POA.

```
char* the_name();
```

This method returns the read-only attribute which identifies the POA relative to its parent. This parent is assigned at POA creation. The name of the root POA is system dependent and should not be relied upon by the application.

```
PortableServer::POA_ptr the_parent();
```

This method returns a pointer to the POA's parent POA. The parent of the root POA is null.

```
PortableServer::POAManager_ptr the_POAManager();
```

This method returns the read-only attribute which is a pointer to the POAManager associated with the POA.


PortableServer::POAManager

Each POA has an associated POA manager which in turn may be associated with one or more POA objects. A POA manager encapsulates the processing state of the POAs with which it is associated.

There are four possible states which a POA manager can be in:

- active
- inactive
- holding
- discarding

A POA manager is created in the holding state. The figure below illustrates the states which a POA manager transitions to based on the method called.

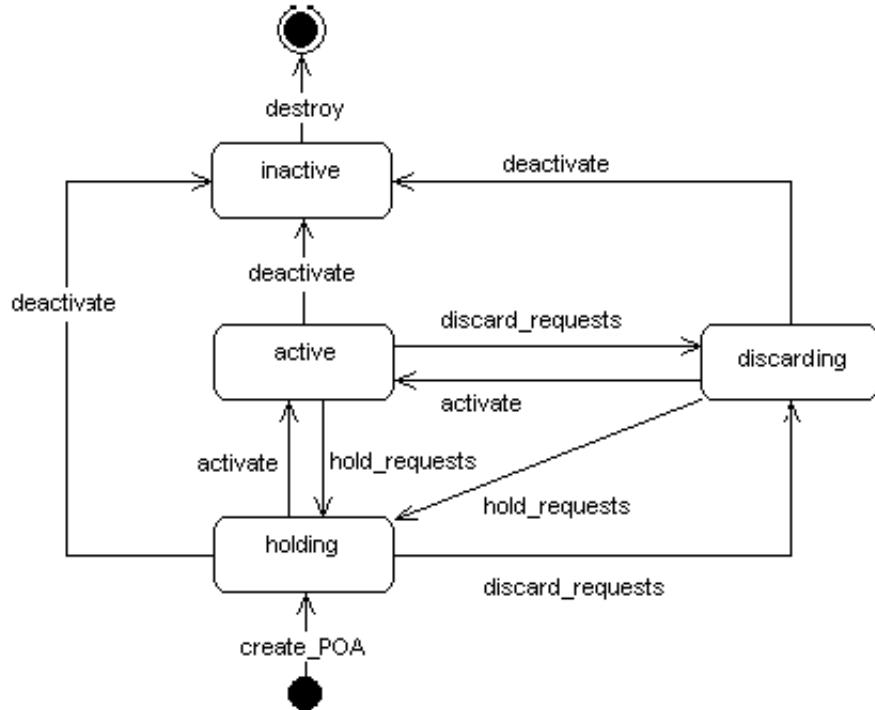

Include file

You should include the file **poa_c.hh** when using this class.

PortableServer::POAManager methods

```
void activate();
```

This method changes the state of the POA manager to active, which enables the associated POAs to process requests. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

```
void deactivate(CORBA::Boolean _etherealize_objects,
                CORBA::Boolean _wait_for_completion);
```

This method changes the state of the POA manager to inactive, which causes the associated POAs to reject requests that have not begun execution, as well as any new requests. If invoked while the POA manager is in the inactive state, the `AdapterInactive` exception is raised.

After the state changes, if the `etherealize_objects` parameter is

- TRUE - the POA manager causes all associated POAs that have the RETAIN and USE_SERVANT_MANAGER policies to perform the etherealize operation on the associated servant manager for all active objects.
- FALSE - the etherealize operation is not called. The purpose is to provide developers with a means to shut down POAs in a crisis (for example, unrecoverable error) situation.

If the `wait_for_completion` parameter is FALSE, this operation returns immediately after changing the state. If the parameter is TRUE and the current thread is not in an invocation context dispatched by some POA

belonging to the same VisiBroker ORB as this POA, this operation does not return until there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) and, in the case of a TRUE etherealize_objects parameter, all invocations of etherealize have completed for POAs having the RETAIN and USE_SERVANT_MANAGER policies. If the parameter is TRUE and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, the BAD_INV_ORDER exception is raised and the state is not changed.

```
void discard_requests(CORBA::Boolean  
                  _wait_for_completion) ;
```

This method changes the state of the POA manager to discarding, which causes the associated POAs to discard incoming requests. In addition, any requests that have been queued but have not started executing are discarded. When a request is discarded, a TRANSIENT system exception is returned to the client. If invoked while the POA manager is in the inactive state, the AdapterInactive exception is raised.

If the **wait_for_completion** parameter is FALSE, this operation returns immediately after changing the state. If the parameter is TRUE and the current thread is not in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, this operation does not return until either there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) or the state of the POA manager is changed to a state other than discarding. If the parameter is TRUE and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, the BAD_INV_ORDER exception is raised and the state is not changed.

```
void hold_requests(CORBA::Boolean  
                  _wait_for_completion) ;
```

This method changes the state of the POA manager to holding, which causes the associated POAs to queue incoming requests. Any requests that have been queued but are not executing will continue to be queued while in the holding state. If invoked while the POA manager is in the inactive state, the AdapterInactive exception is raised.

If the **wait_for_completion** parameter is FALSE, this operation returns immediately after changing the state. If the parameter is TRUE and the current thread is not in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA, this operation does not return until there are no actively executing requests in any of the POAs associated with this POA manager (that is, all requests that were started prior to the state change have completed) and, in the case of a TRUE etherealize_objects parameter, all invocations of etherealize have completed for POAs having the RETAIN and USE_SERVANT_MANAGER policies. If the parameter is TRUE and the current thread is in an invocation context dispatched by some POA belonging to the same VisiBroker ORB as this POA the BAD_INV_ORDER exception is raised and the state is not changed.

Principal

Deprecated feature

```
typedef OctetSequence Principal
```

This feature is deprecated as of VisiBroker 4.0. It is provided for backward compatibility support only. For more information, see "Using the BOA with VisiBroker" in the *VisiBroker for C++ Developer's Guide*. For support of the current CORBA specification support, Micro Focus recommends using POAs. See "Using POAs" in the *VisiBroker for C++ Developer's Guide*.

The Principal is used to represent the client application on whose behalf a request is being made. An object implementation can accept or reject a bind request, based on the contents of the client's Principal.

Include file

You should include the file **corba.h** when using this typedef.

Principal methods

The BOA class provides the `get_principal` method, which returns a pointer to the Principal associated with an object. The Object class also provides methods for getting and setting the Principal.

PortableServer::RefCountServantBase

```
class RefCountServantBase : public ServantBase
```

This class can be used as a standard servant reference counting mix-in class, rather than the PortableServer::ServantBase class which is to be used with inheritance class. (Also see "[PortableServer::ServantBase](#)" on page 43.)

Include file

You should include the file **poa_c.hh** when using this class.

PortableServer::RefCountServantBase methods

```
void _add_ref();
```

This method increments the reference count by one. You can use this method from the base class to provide true reference counting.

```
void _remove_ref();
```

This method decrements the reference count by one. You can override this method from the base class to provide true reference counting.

PortableServer::ServantActivator

```
class PortableServer::ServantActivator : public
    PortableServer::ServantManager
```

If the POA has the RETAIN policy present, then it uses servant managers that are PortableServer::ServantActivator objects.

Include file

You should include the file **poa_c.hh** when using this class.

PortableServer::ServantActivator methods

```
void etherealize(PortableServer::ObjectId& oid,
    PortableServer::POA_ptr adapter,
    PortableServer::Servant serv,
    CORBA::Boolean cleanup_in_progress,
    CORBA::Boolean remaining_activations);
```

This method is called by the specified adapter whenever a servant for an object (the specified `oid`) is deactivated, assuming that the RETAIN and USE_SERVANT_MANAGER policies are present.

Parameter	Description
<code>oid</code>	The object id of the object whose servant is to be deactivated.
<code>adapter</code>	The POA in whose scope the object was active.
<code>serv</code>	The servant which is to be deactivated.
<code>cleanup_in_progress</code>	If set to TRUE, the reason for the invocation of the method is either that the deactivate or destroy method was called with the <code>etherealize_objects</code> parameter set to TRUE; otherwise, the method was called for other reasons.
<code>remaining_activations</code>	If the specified <code>serv</code> is associated with other objects in the specified <code>adapter</code> it is set to TRUE; otherwise it is FALSE.

```
PortableServer::Servant incarnate(const
    PortableServer::ObjectId& oid, PortableServer::POA_ptr
    adapter);
```

This method is called by the POA whenever the POA receives a request for an inactive object (the specified `oid`) assuming that the RETAIN and USE_SERVANT_MANAGER policies are present.

The user supplies a servant manager implementation which is responsible for locating and creating an appropriate servant that corresponds to the specified `oid` value. The method returns a servant, which is also entered into the Active Object map. Any further requests for the active object are passed directly to the servant associated with it without invoking the servant manager.

If this method returns a servant that is already active for a different object id and if the POA also has the `UNIQUE_ID` policy present, then it raises the `OBJ_ADAPTER` exception.

Parameter	Description
<code>oid</code>	The object id of the object whose servant is to be activated.
<code>adapter</code>	The POA in whose scope the object is to be activated.

PortableServer::ServantBase

```
class PortableServer::ServantBase
```

The `Portable::ServantBase` class is the base class for your server application.

Include file

You should include the file `poa_c.hh` when using this class.

PortableServer::ServantBase methods

```
void _add_ref();
```

This method adds a reference count for this servant. It should be overridden to provide reference counting functionality for classes derived from this class as the default implementation does nothing.

```
PortableServer::POA_ptr _default_POA();
```

This method returns an Object reference to the root POA of the default VisiBroker ORB in the current process, (i.e., the same return value as an invocation of `ORB::resolve_initial_references ("RootPOA")` on the default VisiBroker ORB. Classes derived from the `PortableServer::ServantBase` class may override this method to return the POA of their choice, if desired.

```
CORBA::InterfaceDef_ptr _get_interface();
```

This method returns a pointer to this object's interface definition. See "[Interface repository interfaces and classes \(C++\)](#)" for more information.

```
CORBA::Boolean _is_a(const char *rep_id);
```

This method returns TRUE if this servant implements the interface associated with the repository id. Otherwise, it returns FALSE.

Parameter	Description
<code>rep_id</code>	The repository identifier against which to check.

```
void _remove_ref();
```

This method removes a reference count for this servant. It should be overridden to provide reference counting functionality for classes derived from this class as the default implementation does nothing.

PortableServer::ServantLocator

```
class PortableServer::ServantLocator : public
    PortableServer::ServantManager
```

When the POA has the NON_RETAIN policy present, it uses servant managers which are PortableServer::ServantLocator objects. The servant returned by the servant manager will be used only for a single request.

Because the POA knows that the servant returned by the servant manager will be used only for a single request, it can supply extra information for the servant manager's methods and the servant manager's pair of methods may do something different than a PortableServer::ServantLocator servant manager.

Include file

You should include the file **poa_c.hh** when using this class.

PortableServer::ServantLocator methods

```
PortableServer::Servant preinvoke(const
    PortableServer::ObjectId& oid,
    PortableServer::POA_ptr adapter, const char*
    operation, Cookie& the_cookie);
```

This method is called by the POA whenever the POA receives a request for an object that is not currently active, assuming that the NON_RETAIN and USE_SERVANT_MANAGER policies are present.

The user-supplied implementation of the servant manager is responsible for locating or creating an appropriate servant that corresponds to the specified oid value if possible.

Parameter	Description
oid	The ObjectId value that is associated with the incoming request.
adapter	The POA in which the object is to be activated.
operation	The name of the operation which will be called by the POA when the servant is returned.
the_cookie	An opaque value which can be set by the servant manager to be used later in the postinvoke method.

```
void postinvoke(const PortableServer::ObjectId&
    oid, PortableServer::POA_ptr adapter,
    const char* operation, Cookie the_cookie,
    PortableServer::Servant the_servant)
```

If the POA has the NON_RETAIN and USE_SERVANT_MANAGER policies present, this method is called whenever a servant completes a request. This method is considered to be part of the request on an object, (i.e., if the method finishes normally, but postinvoke raises a system exception, then the method's normal return is overridden; and the request completes with the exception).

Destroying a servant that is known to a POA can lead to undefined results.

Parameter	Description
oid	The ObjectId value that is associated with the incoming request.
adapter	The POA in which the object is to be activated.
operation	The name of the operation which will be called by the POA when the servant is returned.
the_cookie	An opaque value which can be set by the servant manager in the preinvoke method for use in this method.
the_servant	The servant associated with the object.

PortableServer::ServantManager

```
class PortableServer::ServantManager
```

Servant managers are associated with Portable Object Adapters (POAs). A servant manager allows a POA to activate objects on demand when the POA receives a request targeted for an inactive object.

The PortableServer::ServantManager class has no methods; rather it is the base class for two other classes: the PortableServer::ServantActivator and the Portableserver::ServantLocator classes. For more details, see “[PortableServer::ServantActivator](#)” on page 42 and “[PortableServer::ServantLocator](#)” on page 44. The use of these two classes depends on the POA’s policies: RETAIN for the PortableServer::ServantActivator and NON_RETAIN for the Portableserver::ServantLocator.

Include file

You should include the file **poa_c.hh** when using this class.

SystemException

```
class CORBA::SystemException : public CORBA::Exception
```

The SystemException class is used to report standard system errors encountered by the VisiBroker ORB or by the object implementation. This class is derived from the Exception class, described in “[Exception](#) on page 17”, which provides methods for printing the name and details of the exception to an output stream.

SystemException objects include a completion status which indicates if the operation that caused the exception was completed. SystemException objects also have a minor code that can be set and retrieved.

Include file

The **corba.h** file should be included when you use this class.

SystemException methods

```
CORBA::SystemException(CORBA::ULong minor = 0,  
                      CORBA::CompletionStatus status =  
                      CORBA::COMPLETED_NO);
```

This method creates a SystemException object with the specified properties.

Parameter	Description
minor	The minor code.
status	The completion status, one of CORBA::COMPLETED_YES, CORBA::COMPLETED_NO, or CORBA::COMPLETED_MAYBE.

```
CORBA::CompletionStatus completed() const;
```

This method returns TRUE if this object's completion status is set to COMPLETED_YES.

```
void completed(CORBA::CompletionStatus status);
```

This method sets the completion status for this object.

Parameter	Description
status	The completion status, one of COMPLETED_YES, COMPLETED_NO, or COMPLETED_MAYBE.

```
CORBA::ULong minor() const;
```

This method returns this object's minor code.

```
void minor(CORBA::ULong val);
```

This method sets the minor code for this object.

Parameter	Description
val	The minor code.

```
static CORBA::SystemException *_downcast  
    (CORBA::Exception *exc);
```

This method attempts to downcast the specified Exception pointer to a SystemException pointer. If the supplied pointer points to a SystemException object or an object derived from SystemException, a pointer to the object is returned. If the supplied pointer does not point to a SystemException object, a NULL pointer is returned.

Parameter	Description
exc	An Exception pointer to be down casted.

Note

The reference count for the Exception object is not incremented by this method.

Exception name	Description
BAD_INV_ORDER	Routine invocations out of order.
BAD_OPERATION	Invalid operation.

Exception name	Description
BAD_CONTEXT	Error processing context object.
BAD_PARAM	An invalid parameter was passed.
BAD_TYPECODE	Invalid typecode.
COMM_FAILURE	Communication failure.
DATA_CONVERSION	Data conversion error.
FREE_MEM	Unable to free memory.
IMP_LIMIT	Implementation limit violated.
INITIALIZE	ORB initialization failure.
INTERNAL	ORB internal error.
INTF_REPOS	Error accessing interface repository.
INV_FLAG	Invalid flag was specified.
INV_INDENT	Invalid identifier syntax.
INV_OBJREF	Invalid object reference specified.
MARSHAL	Error marshalling parameter or result.
NO_IMPLEMENT	Operation implementation not available.
NO_MEMORY	Dynamic memory allocation failure.
NO_PERMISSION	No permission for attempted operation.
NO_RESOURCES	Insufficient resources to process request.
NO_RESPONSE	Response to request not yet available.
OBJ_ADAPTER	Failure detected by object adaptor.
OBJECT_NOT_EXIST	Object is not available.
PERSIST_STORE	Persistent storage failure.
TRANSIENT	Transient failure.
UNKNOWN	Unknown exception.

UserException

```
class CORBA::UserException : public CORBA::Exception
```

The UserException base class is used to derive the user exceptions that your object implementations may want to raise. This class is derived from the Exception class, described in “[Exception](#)”, which provides methods for printing the name and details of the exception to an output stream.

UserException objects include a completion status which indicates if the operation that caused the exception was completed. UserException objects also have a minor code that can be set and retrieved.

Include file

The **corba.h** file should be included when you use this class.

UserException methods

This method creates a UserException object with the specified properties.

Parameter	Description
minor	The minor code.
status	The completion status, one of CORBA::COMPLETED_YES, CORBA::COMPLETED_NO, or CORBA::COMPLETED_MAYBE.

UserException derived classes

```
class AdapterAlreadyExists : public CORBA::UserException
class AdapterInactive : public CORBA::UserException
class AdapterNonExistent : public CORBA::UserException
class InvalidPolicy : public CORBA::UserException
class NoServant : public CORBA::UserException
class ObjectAlreadyActive : public CORBA::UserException
class ObjectNotActive : public CORBA::UserException
class ServantAlreadyActive : public CORBA::UserException
class ServantNotActive : public CORBA::UserException
class WrongAdapter : public CORBA::UserException
class WrongPolicy : public CORBA::UserException
class ManagerAlreadyExists : public CORBA::UserException
```

Dynamic interfaces and classes

This section describes the classes that support the Dynamic Invocation Interface used by client applications and the Dynamic Skeleton Interface used by object servers.

Any

The CORBA::Any class is used to represent an IDL type so that its value may be passed in a type-safe manner. Objects of this class have a pointer to a TypeCode that defines the object's type and a pointer to the value associated with the object. Methods are provided to construct, copy, and destroy an object as well as to initialize and query the object's type and value. In addition, streaming operators are provided to read and write the object to a stream.

The code sample below provides an example of how to create and use an Any.

```
// create an any object
CORBA::Any anObject;
// use the typecode operator to specify that
// 'anObject' object can store long
anObject <<= CORBA::_tc_long;
```

Include file

Include the **CORBA.h** file when you use this structure.

Any methods

CORBA::Any() ;

This is the default constructor. It creates an empty Any object.

CORBA::Any(const CORBA::Any& val) ;

This is a copy constructor; it creates an Any object that is a copy of the specified target.

Parameter	Description
val	The object to be copied.

**CORBA::Any(CORBA::TypeCode_ptr tc,
void *value, CORBA::Boolean release = 0)** ;

This constructor creates an Any object initialized with the specified value and TypeCode.

Parameter	Description
tc	The TypeCode of the value contained by this Any.

Parameter	Description
value	The value contained by this Any.
release	If set to TRUE, the memory associated with this Any object's value is released when this Any object is destroyed.

```
static CORBA::Any_ptr _duplicate(CORBA::Any_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to it.

Parameter	Description
ptr	The Any to be duplicated.

```
static CORBA::Any_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::Any_ptr *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The Any to be released.

Insertion operators

```
void operator<<=(CORBA::Short);
void operator<<=(CORBA::UShort);
void operator<<=(CORBA::Long);
void operator<<=(CORBA::ULong);
void operator<<=(CORBA::Float);
void operator<<=(CORBA::Double);
void operator<<=(const CORBA::Any&);
void operator<<=(const char *);
void operator<<=(CORBA::LongLong);
void operator<<=(CORBA::ULongLong);
void operator<<=(CORBA::LongDouble);
```

These operators initialize this object with the specified value, automatically setting the appropriate TypeCode for the value. If this Any object was constructed with the release flag set to TRUE, the value previously stored in this Any object is released before the new value is assigned.

```
void operator<<=(CORBA::TypeCode_ptr tc);
```

This method initializes this object with the specified TypeCode of the value.

Parameter	Description
tc	The TypeCode to set for this Any.

Extraction operators

```
CORBA::Boolean operator>>=(CORBA::Short&) const;
CORBA::Boolean operator>>=(CORBA::UShort&) const;
CORBA::Boolean operator>>=(CORBA::Long&) const;
```

```

CORBA::Boolean operator>>=(CORBA::ULong&) const;
CORBA::Boolean operator>>=(CORBA::Float&) const;
CORBA::Boolean operator>>=(CORBA::Double&) const;
CORBA::Boolean operator>>=(CORBA::Any&) const;
CORBA::Boolean operator>>=(const char *&) const;
CORBA::Boolean operator>>=(CORBA::LongLong&) const;
CORBA::Boolean operator>>=(CORBA::ULongLong&) const;
CORBA::Boolean operator>>=(CORBA::LongDouble&) const;

```

These operators store the value from this object into the specified target. If the TypeCode of the target does not match the TypeCode of the stored value, FALSE is returned and no value is extracted. Otherwise, the stored value is assigned to the target and TRUE is returned.

Deprecated operator

The following extraction operator is deprecated:

```
CORBA::Boolean operator>>=(char *&) const;
```

It is supported for backward compatibility, but Micro Focus recommend that where possible, you use an operator in the above list instead.

```
CORBA::Boolean operator>>=(CORBA::TypeCode_ptr& tc)
                           const;
```

This method extracts the TypeCode of the value stored in this object.

Parameter	Description
tc	The object where the TypeCode for this Any is to be stored.

ContextList

```
class CORBA::ContextList
```

This class contains a list of contexts that may be associated with an operation request. See “[Request](#)” on page 69 for more information.

ContextList methods

```
CORBA::ContextList();
```

This method constructs an empty Context list.

```
~CORBA::ContextList();
```

This method is the default destructor.

```
void add(const char *ctx);
```

This method adds the specified context to this object's list.

Parameter	Description
ctx	The context to be added to the list.

```
void add_consume(char *ctx);
```

This method adds the specified context code to this object's list. ThisContextList becomes the owner of the context specified by the

argument. You should not attempt to access or free this Context after you invoke this method.

Parameter	Description
ctx	The context to be added to the list.

```
CORBA::ULong count() const;
```

This method returns the number of items currently stored in the list.

```
const char *item(CORBA::ULong index) ;
```

This method returns a pointer to the context that is stored in the list at the specified index. If the index is invalid, a NULL pointer is returned. You should not attempt to free the returned context. To remove a context, use the `remove` method instead.

Parameter	Description
index	The zero-based index of the context to be returned.

```
void remove(CORBA::ULong index) ;
```

This method removes the context with the specified index from the list. If the index is invalid, no removal will occur.

Parameter	Description
index	The zero-based index of the context to be removed.

```
static CORBA::ContextList-_ptr  
_duplicate(CORBA::ContextList_ptr ptr) ;
```

This static method increments the reference count for the object and then returns a pointer to it.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::ContextList_ptr _nil() ;
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ContextList *ptr) ;
```

This static method decrements the reference count for this object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

DynamicImplementation

```
class PortableServer::DynamicImplementation : public  
PortableServer::ServantBase
```

This base class is used derive object implementations that use the Dynamic Skeleton Interface instead of a skeleton class generated by the IDL compiler. You must provide implementations of the `invoke` and `_primary_interface()` methods when deriving from this class.

DynamicImplementation methods

```
virtual void invoke(CORBA::ServerRequest_ptr request) =  
0;
```

This method is invoked by the POA whenever client operation requests are received for your object implementation. You must provide an implementation of this method which validates the `ServerRequest` object's contents, performs the necessary processing to fulfill the request, and returns the results to the client. For more information on the `ServerRequest` class, see "["ServerRequest" on page 72](#)".

Parameter	Description
request	The <code>ServerRequest</code> object that represents the client's operation request.

```
virtual CORBA::RepositoryId _primary_interface(  
const PortableServer::ObjectIds& oid  
PortableServer::POA_ptr poa) const;
```

This method will be invoked as a callback by the POA. The servants that inherit from the `DynamicImplementation` class must implement it. This method should be called directly or unpredictable behavior will result. Invoking this method under other circumstances may lead to unpredictable results. The `_primary_interface` method receives an `ObjectId` value and a `POA_ptr` as input parameters and returns a valid `RepositoryId` representing the most-derived interface for that `oid`.

DynAny

```
class DynamicAny::DynAny : public CORBA::LocalObject
```

A `DynAny` object is used by a client application or server to create and interpret data types at runtime which were not defined at compile time. A `DynAny` may contain a basic type (such as a `boolean`, `int`, or `float`) or a complex type (such as a `struct` or `union`). The type contained by a `DynAny` is defined when it is created and may not be changed during the lifetime of the object.

A `DynAny` object may represent a data type as one or more components, each with its own value. The `next`, `seek`, `rewind`, and `current_component` methods are provided to help you navigate through the components.

A `DynAnyFactory` is created by calling `ORB::resolve_initial_references("DynAnyFactory")`. The factory is then used to create basic or complex types. The `DynAnyFactory` belongs to the `DynamicAny` module.

DynAny objects for basic types are created using the `DynAnyFactory::create_dyn_any_from_type_code` method. A DynAny object may also be created and initialized from an Any object using the `DynAnyFactory::create_dyn_any` method.

The following interfaces are derived from DynAny and provide support for constructed types that are managed dynamically.

Constructed type	Interface
Array	DynArray in “ DynArray ” on page 57.
Enumeration	DynEnum in “ DynEnum ” on page 58.
Sequence	DynSequence in “ DynSequence ” on page 59.
Structure	DynStruct in “ DynStruct ” on page 60
Union	DynUnion in “ DynUnion ” on page 61

Include file

The **dynany.h** file should be included when you use this class.

Important usage restrictions

DynAny objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `DynAny::to_any` method to convert a DynAny object into an Any, which can be used as a parameter.

DynAny methods

`void assign(DynamicAny::DynAny_ptr dyn_any);`

Initializes the value in this DynAny object from the specified DynAny.

A type mismatch exception is raised if the type contained in the Any does not match the type contained by this object.

`DynamicAny::DynAny_ptr copy();`

Returns a copy of this object.

`virtual CORBA::ULong component_count();`

Returns the number of components for the complex type stored inside the DynAny as an unsigned long.

`virtual DynamicAny::DynAny_ptr current_component();`

Returns the current component in this object.

`virtual void destroy();`

Destroys this object.

`virtual CORBA::Boolean equal(const DynamicAny::DynAny_ptr value);`

Compares two DynAny values for equality. Returns TRUE if they are equal, FALSE otherwise.

```
virtual void from_any(const CORBA::Any& value) ;
```

Initializes the current component of this object from the specified Any object.

A type mismatch exception is raised if the TypeCode of value contained in the Any does not match the TypeCode that was defined for this object when it was created.

If the value parameter passed is not legal, the operation raises an InvalidValue exception.

Parameter	Description
value	An Any object containing the value to set for this object.

```
virtual CORBA::Boolean next() ;
```

Advances to the next component, if one exists, and returns TRUE. If there are no more components, this method returns FALSE.

```
virtual void rewind();
```

Sets the current component of this object to be the first component defined in this DynAny.

If this object contains only one component, invoking this method has no effect.

```
virtual CORBA::Boolean seek(CORBA::Long index) ;
```

Makes the component with the specified index the current component. If there is no component at the specified index, this method returns FALSE, otherwise it returns TRUE.

Parameter	Description
index	The zero-based index of the desired component.

```
virtual CORBA::Any* to_any( ) ;
```

Converts the DynAny object into an Any object and returns a pointer to the Any object.

```
CORBA::TypeCode_ptr type();
```

Returns the TypeCode of the value stored in the DynAny.

Extraction methods

The DynAny extraction methods return the type contained in this DynAny object's current component. The list below shows the name of each of the extraction methods.

A TypeMismatch exception is raised if the value contained in this DynAny does not match the expected return type for the extraction method used.

Extraction methods offered by the DynAny class are:

```
virtual CORBA::Any* get_any();
virtual CORBA::Boolean get_boolean();
virtual CORBA::Char get_char();
virtual CORBA::Double get_double();
virtual DynamicAny::DynAny* get_dyn_any();
```

```

virtual CORBA::Float get_float();
virtual CORBA::Long get_long();
virtual CORBA::LongLong get_longlong();
virtual CORBA::Octet get_octet();
virtual CORBA::Object_ptr get_reference();
virtual CORBA::Short get_short();
virtual char* get_string();
virtual CORBA::TypeCode_ptr get_typecode();
virtual CORBA::ULong get_ulong();
virtual CORBA::UlongLong get_ulonglong();
virtual CORBA::UShort get_ushort();
virtual CORBA::ValueBase* get_val();
virtual CORBA::WChar get_wchar();
virtual CORBA::WChar* get_wstring();

Solaris, AIX, HP-UX, and Linux 64-bit:
virtual CORBA::LongDouble get_longdouble();

```

Insertion methods

An insertion method copies a value of a particular type to this DynAny object's current component. Following is the list of methods provided for inserting various types.

These methods raise an `InvalidValue` exception if the inserted object's type does not match the DynAny object's type.

Insertion methods offered by the DynAny class are:

```

virtual void insert_any(const CORBA::Any& value);
virtual void insert_boolean(CORBA::Boolean value);
virtual void insert_char(CORBA::Char value);
virtual void insert_double(CORBA::Double value);
virtual void insert_dyn_any (const DynamicAny::DynAny_ptr
                           value);
virtual void insert_float(CORBA::Float value);
virtual void insert_long(CORBA::Long value);
virtual void insert_longlong(CORBA::LongLong value);
virtual void insert_octet(CORBA::Octet value);
virtual void insert_reference(CORBA::Object_ptr value);
virtual void insert_short(CORBA::Short value);
virtual void insert_string(const char* value);
virtual void insert_typecode(CORBA::TypeCode_ptr value);
virtual void insert_ulong(CORBA::ULong value);
virtual void insert_ulonglong(CORBA::UlongLong value);
virtual void insert_ushort(CORBA::UShort value);
virtual void insert_val(const CORBA::ValueBase& value);
virtual void insert_wchar(CORBA::WChar value);
virtual void insert_wstring(const CORBA::WChar* value);

Solaris, AIX, HP-UX, and Linux 64-bit:
virtual void insert_longdouble(CORBA::LongDouble value);
Solaris only

```

DynAnyFactory

```
class DynamicAny::DynAnyFactory : public  
    CORBA::LocalObject
```

A DynAnyFactory object is used to create a new DynAny object. To obtain a reference to the DynAnyFactory object, call `ORB::resolve_initial_references ("DynAnyFactory")`.

DynAnyFactory methods

`DynAny_ptr create_dyn_any (const CORBA::Any& value);`
Creates a DynAny object of the specified value

Parameter	Description
value	A new DynAny object of a specified value.

`DynAny_ptr create_dyn_any_from_type_code
(CORBA::TypeCode_ptr type);`

Creates a DynAny object of the specified type.

Parameter	Description
type	The type of the new DynAny object.

DynArray

```
class DynamicAny::DynArray : public VISDynComplex
```

Objects of this class are used by a client application or server to create and interpret array data types at runtime which were not defined at compile time. A DynArray may consist of a sequence of basic types (such as a boolean, int, or float) or constructed types (such as struct or union). The type contained by a DynArray is defined when it is created and may not be changed during the lifetime of the object.

The next, rewind, seek, and current_component methods, inherited from DynAny, may be used to navigate through the components.

The VISDynComplex class is a helper class that allows the VisiBroker ORB to manage complex DynAny types.

Important usage restrictions

DynArray objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `DynAny::to_any` method to convert a DynArray object to a sequence of Any objects, which can be used as a parameter.

DynArray methods

`virtual void destroy();`

Destroys this object.

```
CORBA::AnySeq* get_elements();
```

Returns a sequence of Any objects containing the values stored in this object.

```
void set_elements(const CORBA::AnySeq& _value);
```

Assigns the elements in the DynArray to those in the sequence specified by the value parameter.

```
DynamicAny::DynAnySeq* get_elements_as_dyn_any();
```

Returns the elements contained in the DynAny as a DynAny sequence.

```
void set_elements_as_dyn_any (const DynamicAny::DynAnySeq& value);
```

Sets the elements contained in the object from the specified DynAny sequence.

An InvalidValue exception is raised if the number of elements in value is not equal to the number of elements in this DynArray. A type mismatch exception is raised if the type of the Any values do not match the TypeCode of the DynAny.

Parameter	Description
<code>_value</code>	An array of Any objects whose values will be set in this DynArray.

DynEnum

```
class DynamicAny::DynEnum : public DynamicAny::DynAny
```

Objects of this class are used by a client application or server to create and interpret enumeration values at runtime which were not defined at compile time.

Since objects of this type contains a single component, the DynAn::rewind and DynAny::next methods of a DynEnum object always return FALSE.

Important usage restrictions

DynEnum objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the ORB::object_to_string method. However, you may use the to_any method to convert a DynEnum object to an Any, which can be used as a parameter.

DynEnum methods

```
void from_any(const CORBA::Any& value);
```

Initializes the value of this object using the specified Any object.

An Invalid exception is raised if the TypeCode of value contained in the Any does not match the TypeCode defined for this object when it was created.

Parameter	Description
<code>value</code>	An Any object.

```
CORBA::Any* to_any();
```

Returns an Any object containing the value of the current component.

```
char* get_as_string();
```

Returns the DynEnum object's value as a string.

```
void set_as_string(const char* value_as_string);
```

Sets the value of this DynEnum to the specified string.

Parameter	Description
value_as_string	A string that will be used to set the value in this DynEnum.

```
CORBA::ULong get_as_ulong()
```

Returns an unsigned long containing the DynEnum object's value.

```
void set_as_ulong(CORBA::ULong value_as_ulong)
```

Sets the value of this DynEnum to the specified CORBA::ULong.

Parameter	Description
value_as_ulong	An integer that will be used to set the value in this DynEnum.

DynSequence

```
class DynamicAny::DynSequence : public  
    DynamicAny::DynArray
```

Objects of this class are used by a client application or server to create and interpret sequence data types at runtime which were not defined at compile time. A DynSequence may contain a sequence of basic types (such as a boolean, int, or float) or constructed types (such as a struct or union). The type contained by a DynSequence is defined when it is created and may not be changed during the lifetime of the object.

The next, rewind, seek, and current_component methods may be used to navigate through the components.

Important usage restrictions

DynSequence objects cannot be used as parameters on operation requests or DII requests nor can they be externalized using the ORB::object_to_string method. However, you may use the to_any method to convert a DynSequence object to a sequence of Any objects. You can use the sequence of Any objects as a parameter.

DynSequence methods

```
CORBA::ULong get_length();
```

Returns the number of elements contained in this DynSequence.

```
void set_length(CORBA::ULong length);
```

Sets the number of elements contained in this DynSequence.

If you specify a length that is less than the current number of elements, the sequence is truncated.

Parameter	Description
length	The number of components to be contained in this DynSequence.

```
CORBA::AnySeq * get_elements();
```

Returns a sequence of Any objects containing the value stored in this object.

```
void set_elements (const AnySeq& _value)
```

Sets the elements within this object with specified sequence of Any objects.

```
set _elements_as_dyn_any();
```

See “[DynArray](#)” on page [57](#) for more details.

```
get_elements_as_dyn_any();
```

See “[DynArray](#)” on page [57](#) for more details.

DynStruct

```
class DynamicAny::DynStruct :public VISDynComplex
```

Objects of this class are used by a client application or server to create and interpret structures at runtime which were not defined at compile time.

The next, rewind, seek, and current_component methods may be used to navigate through the structure members.

You create an DynStruct object by invoking the `DynAnyFactory::create_dyn_any_from_typecode` method.

Important usage restrictions

DynStruct objects cannot be used as parameters on operation requests or DII requests, nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `to_any` method to convert a DynStruct object to an Any object, which can be used as a parameter.

DynStruct methods

```
void destroy();
```

Destroys this object.

```
CORBA::FieldName current_member_name();
```

Returns the member name of the current component.

```
CORBA::TCKind current_member_kind();
```

Returns the TypeCode associated with the current component.

```
DynamicAny::NameValuePairSeq get_members();
```

Returns the members of the structure as a sequence of NameValuePair objects.

```
void set_members(const DynamicAny::NameValuePairSeq& value);
```

Sets the structure members from the array of NameValuePair objects.

```
DynamicAny::NameDynAnyPairSeq get_members_as_dyn_any();
```

Returns the members of the structure as a NameDynAnyPair sequence.

```
void set_members_as_dyn_any(const DynamicAny::NameDynAnyPairSeq value);
```

Sets the structure members from NameDynAnyPair objects.

An `InvalidValue` exception is raised if the length of the value sequence is not equal to the number of members of `DynStruct`, and a `TypeMismatch` exception is raised when any of the element's typecode does not match that of the structure.

DynUnion

```
class DynamicAny::DynUnion : public VISDynComplex
```

This interface is used by a client application or server to create and interpret unions at runtime which were not defined at compile time. The `DynUnion` contains a sequence of two elements: the union discriminator and the actual member.

The `next`, `rewind`, `seek`, and `current_component` methods may be used to navigate through the components.

You create a `DynUnion` object by invoking the `DynamicAny::DynAnyFactory::create_dyn_any_from_type_code` method and passing a union type code as an argument.

Important usage restrictions

`DynUnion` objects cannot be used as parameters on operation requests or DII requests nor can they be externalized using the `ORB::object_to_string` method. However, you may use the `DynAny::to_any` method to convert a `DynUnion` object to an `Any` object which can be used as a parameter.

DynUnion methods

```
DynamicAny::DynAny_ptr get_discriminator();
```

Returns a `DynAny` object containing the discriminator for the union.

```
CORBA::TCKind discriminator_kind();
```

Returns the type code of the discriminator for the union.

```
DynamicAny::DynAny_ptr member();
```

Returns a DynAny object for the current component which represents a union member.

```
CORBA::TCKind member_kind();
```

Returns the type code for the current component, which represents a member in the union.

```
CORBA::FieldName member_name();
```

Returns the member name of the current component.

```
void set_discriminator (const DynamicAny::DynAny_ptr value);
```

Sets the discriminator of this DynUnion to the specified value.

```
void set_to_default_member();
```

Sets the discriminator to a value that is consistent with the value of the default case of a union.

```
void set_to_no_active_member();
```

Sets the discriminator to a value that does not correspond to any of the union's case labels.

```
CORBA::Boolean has_no_active_member();
```

Returns TRUE if the union has no active member (that is, the union's value consists solely of its discriminator because the discriminator has a value that is not listed as an explicit case label).

Environment

class CORBA::Environment

The Environment class is used for reporting and accessing both system and user exceptions on platforms where C++ language exceptions are not supported. When an interface specifies that user exceptions may be raised by the object's methods, the Environment class becomes an explicit parameter of that method. If an interface does not raise any exceptions, the Environment class is an implicit parameter and is only used for reporting system exceptions. If an Environment object is not passed from the client to a stub, the default of per-object Environment is used.

Multithreaded applications have a global Environment object for each thread that is created. Applications that are not multithreaded have just one global Environment object.

Include file

You should include the **corba.h** file when you use this class.

Environment methods

```
void ORB::create_environment(COBRA::Environment_out  
    ptr);
```

This method can be used to create a new Environment object.

Note

This method is provided for CORBA compliance. You may find it easier to use the constructor provided for this class or the C++ new operator.

Parameter	Description
ptr	The pointer will be set to point to the newly created object.

```
Environment();
```

This method creates an Environment object. This is equivalent to calling the ORB::create_environment method.

```
static COBRA::Environment&  
CORBA::current_environment();
```

This static method returns a reference to the global Environment object for the application process. In multithreaded applications, it returns the global Environment object for this thread.

```
void exception(COBRA::Exception *exp);
```

This method records the Exception object passed as an argument. The Exception object must be dynamically allocated because the specified object will assume ownership of the Exception object and will delete it when the Environment itself is deleted. Passing a NULL pointer to this method is equivalent to invoking the clear method on the Environment.

Parameter	Description
exp	A pointer to a dynamically allocated Exception object to be recorded for this Environment.

```
CORBA::Exception *exception() const;
```

This method returns a pointer to the Exception currently recorded in this Environment. You must not invoke delete on the Exception pointer returned by this call. If no Exception has been recorded, a NULL pointer is returned.

```
void clear();
```

This method deletes any Exception object that it holds. If this object holds no exception, this method has no effect.

ExceptionList

```
class CORBA::ExceptionList
```

This class contains a list of type codes that represent exceptions that may be raised by an operation request. See ["Request" on page 69](#).

ExceptionList methods

`CORBA::ExceptionList();`

This method constructs an empty exception list.

`CORBA::ExceptionList(CORBA::ExceptionList& list);`

This is a copy constructor.

Parameter	Description
list	The list to be copied.

`~CORBA::ExceptionList();`

This method is the default destructor.

`void add(CORBA::TypeCode_ptr tc);`

This method adds the specified exception type code to this object's list.

Parameter	Description
tc	The type code of an exception to be added to the list.

`void add_consume(CORBA::TypeCode_ptr tc);`

This method adds the specified exception type code to this object's list. Ownership of the passed argument is assumed by this `ExceptionList`. You should not attempt to access or free the argument after invoking this method.

Parameter	Description
tc	The type code of an exception to be added to the list.

`CORBA::ULong count() const;`

This method returns the number of items currently stored in the list.

`CORBA::TypeCode_ptr item(CORBA::ULong index);`

This method returns a pointer to the TypeCode stored in the list at the specified index. If the index is invalid, a NULL pointer is returned. You should not attempt to access or free the argument after invoking this method. To remove a TypeCode from the list, use the `remove` method.

Parameter	Description
index	The zero-based index of the type code to be returned.

`void remove(CORBA::long index);`

This method removes the TypeCode with the specified `index` from the list. If the `index` is invalid, no removal occurs.

Parameter	Description
index	The index of the type code to be removed. The index is zero-based.

```
static CORBA::ExceptionList::_ptr _duplicate(
    CORBA::ExceptionList_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::ExceptionList_ptr _nil();
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ExceptionList *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

NamedValue

```
class CORBA::NamedValue
```

The NamedValue class is used to represent a name-value pair used as a parameter or return value in a Dynamic Invocation Interface request. Objects of this class are grouped into an NVList, described in “[NVList on page 66](#)”. The value of the name-value pair is represented by using an Any object. The Request class is described in “[Request on page 69](#)”.

Include file

You should include the file **corba.h** when using this class.

NamedValue methods

```
CORBA::Flags flags() const;
```

This method returns the flag defining how this name-value pair is to be used. It returns one of the following:

ARG_IN	The name-value pair is used as an input parameter.
ARG_OUT	The name-value pair is used as an output parameter.
ARG_INOUT	The name-value pair is used both as an input and an output parameter.
IN_COPY_VALUE	When combined with the ARG_INOUT flag, this flag indicates that the ORB copies the output parameter. This allows the ORB to release memory associated with this parameter without impacting the client application's memory.

```
const char *name() const;
```

This method returns the name portion of this object's name-value pair. You should never release the storage pointed to by the return argument.

```
CORBA::Any *value() const;
```

This method returns the value portion of this object's name-value pair. You should never release the storage pointed to by the return argument.

```
static CORBA::NamedValue_ptr  
_duplicate(CORBA::NamedValue_ptr ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to it.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::NamedValue_ptr _nil();
```

This static method returns a NULL pointer that can be used to initialize a CORBA::NamedValue_ptr.

```
static void _release(CORBA::NamedValue *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

NVList

```
class CORBA::NVList
```

The NVList class is used to contain a list of NamedValue objects, described in “[NamedValue](#) on page 65”. It is used to pass parameters associated with a Dynamic Invocation Interface request. The Request class is described in “[Request](#)” on page 69.

Several methods are provided for adding items to the list. You should never release the storage pointed to by the return argument. Always use the remove method to delete an item from the list.

Include file

You should include the file **corba.h** when using this class.

NVList methods

```
CORBA::NamedValue_ptr add(CORBA::Flags flags);
```

This method adds a NamedValue object to this list, initializing only the flags. Neither the name or value of the added object are initialized. A pointer is returned which can be used to initialize the name and value attributes of the

NamedValue. You should never release the storage associated with the return argument.

Parameter	Description
flags	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
CORBA::NamedValue_ptr add_item(const char *name,  
                               CORBA::Flags flag);
```

This method adds a NamedValue object to this list, initializing the object's flag and name attributes. A pointer is returned which can be used to initialize the value attribute of the NamedValue.

Caution

You should never release the storage associated with the return argument.

Parameter	Description
name	The name.
flag	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
NamedValue_ptr add_item_consume(char *nm, CORBA::Flags  
                                flag);
```

This method is the same as the add_item method, except that the NVList takes over the management of the storage pointed to by nm. You will not be able to access nm after this method is called because the list may have copied and released it. When this item is removed, the storage associated with it is automatically freed.

Caution

You should never release the memory associated with this method's return value.

Parameter	Description
name	The name.
flag	The flag indicating the intended use of the NamedValue object. It must be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
CORBA::NamedValue_ptr add_value(const char *name, const  
                                 CORBA::Any *value, CORBA::Flags flag);
```

This method adds a NamedValue object to this list, initializing the name, value, and flag. A pointer to the NamedValue object is returned.

Caution

You should never release the storage associated with the return argument.

Parameter	Description
name	The name.
value	The value.
flag	The flag indicating the intended use of the NamedValue object. It can be one of ARG_IN, ARG_OUT, or ARG_INOUT.

```
NamedValue_ptr add_value_consume(char *nm, CORBA::Any
    *value, CORBA::Flags flag);
```

This method is the same as the `add_value` method, except that the NVList takes over the management of the storage pointed to by `nm` and `value`. You will not be able to access `nm` or `value` after this method is called because the list may have copied and released them. When this list element is removed, the storage associated with it is automatically freed.

Parameter	Description
<code>nm</code>	The name.
<code>value</code>	The value.
<code>flag</code>	The flag indicating the intended use of the <code>NamedValue</code> object. It must be one of <code>ARG_IN</code> , <code>ARG_OUT</code> , or <code>ARG_INOUT</code> .

```
CORBA::Long count() const;
```

This method returns the number of `NamedValue` objects in this list.

```
static CORBA::Boolean CORBA::is_nil(NVList_ptr obj);
```

This method returns TRUE if the specified `NamedValue` pointer is NULL.

Parameter	Description
<code>obj</code>	The pointer to the object to be checked.

```
NamedValue_ptr item(CORBA::ULong index);
```

This method returns the `NamedValue` in the list with the specified index.

Caution

Never release the storage associated with the return argument.

Parameter	Description
<code>index</code>	The zero-based index of the desired <code>NamedValue</code> object.

```
static void CORBA::release(CORBA::NVList_ptr obj);
```

This static method releases the specified object.

Parameter	Description
<code>obj</code>	The object to be released.

```
void remove(CORBA::ULong index);
```

This method deletes the `NamedValue` object located at the specified index from this list. Storage associated with items in the list that were added using the `add_item_consume` or `add_value_consume` methods is released before the item is removed.

Parameter	Description
<code>index</code>	The index of the <code>NamedValue</code> object. Note that indexing is zero-based.

```
static CORBA::NVList_ptr _duplicate(CORBA::NVList_ptr  
ptr);
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::NVList_ptr _nil();
```

This static method returns a NULL pointer that can be used to initialize an NV_List pointer. For example, you might do something like this:
CORBA::NV_List_ptr p = CORBA::NVList::_nil();

```
static void _release(CORBA::NVList *ptr);
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

Request

```
class CORBA::Request
```

The Request class is used by client applications to invoke an operation on an ORB object using the Dynamic Invocation Interface. A single ORB object is associated with a given Request object. The Request represents an operation that is to be performed on the ORB object. It includes the arguments to be passed, the Context, and an Environment object, if any. Methods are provided for invoking the request, receiving the response from the object implementation, and retrieving the result of the operation.

You can create a Request object by using the Object::_create_request. For more information, go to "[Core interfaces and classes](#)".

Note

A Request object retains ownership of all return parameters, so you should never attempt to free them.

Include file

Include the **corba.h** file when you use this class.

Request methods

```
CORBA::Any& add_in_arg();
```

This method adds an unnamed input argument to this Request and returns a reference to the Any object so that you can set its name, type, and value.

```
CORBA::Any& add_in_arg(const char *name);
```

This method adds a named input argument to this Request and returns a reference to the Any object so that you can set its type and value.

Caution

You should never release the memory associated with this method's return value.

Parameter	Description
name	The name of the input argument to be added.

`CORBA::Any& add_inout_arg();`

This method adds an unnamed inout argument to this Request and returns a reference to the Any object so that you can set its name, type, and value.

`CORBA::Any& add_inout_arg(const char *name);`

This method adds a named inout argument to this Request and returns a reference to the Any object so that you can set its type and value.

Parameter	Description
name	The name of the inout argument to be added.

`CORBA::Any& add_out_arg();`

This method adds an unnamed output argument to this Request and returns a reference to the Any object so that you can set its name, type, and value.

`CORBA::Any& add_out_arg(const char *name);`

This method adds a named output argument to this Request and returns a reference to the Any object so that you can set its type and value.

Parameter	Description
name	The name of the output argument to be added.

`CORBA::NVList_ptr arguments();`

This method returns a pointer to an NVList object containing the arguments for this request. The pointer can be used to set or retrieve the argument values. For more information on NVList, see ["NVList" on page 66](#).

Caution

You should never release the memory associated with this method's return value.

`CORBA::ContextList_ptr contexts();`

This method returns a pointer to a list of all the Context objects that are associated with this Request. For more information on the Context class, go to ["Core interfaces and classes"](#).

Caution

You should never release the memory associated with this method's return value.

```
CORBA::Context_ptr ctx() const;
```

This method returns a pointer to the Context associated with this request.

```
void ctx(CORBA::Context_ptr ctx);
```

This method sets the Context to be used with this request. For more information on the Context class, go to “[Core interfaces and classes](#)”.

Parameter	Description
ctx	The Context object to be associated with this request.

```
CORBA::Environment_ptr env();
```

This method returns a pointer to the Environment associated with this request. For more information on the Environment class, go to “[Environment](#)” on page 62.

```
CORBA::ExceptionList_ptr exceptions();
```

This method returns a pointer to a list of all the exceptions that this request may raise.

Caution

You should never release the memory associated with this method's return value.

```
void get_response();
```

This method is used after the send_deferred method has been invoked to retrieve a response from the object implementation. If there is no response available, this method blocks the client application until a response is received.

```
void invoke();
```

This method invokes this Request on the ORB object associated with this request. This method blocks the client until a response is received from the object implementation. This Request should be initialized with the target object, operation name and arguments before this method is invoked.

```
const char* operation() const;
```

This method returns the name of the operation that this request performs.

```
CORBA::Boolean poll_response();
```

This non-blocking method is invoked after the send_deferred method to determine if a response has been received. This method returns TRUE if a response has been received, otherwise it returns FALSE.

```
CORBA::NamedValue_ptr result();
```

This method returns a pointer to a NamedValue object where the return value for the operation will be stored. The pointer can be used to retrieve the result value after the request has been processed by the object implementation. For more information on the NamedValue class, go to “[NamedValue](#)” on page 65.

```
CORBA::Any& return_value() ;
```

This method returns a reference to an Any object that represents the return value of this Request object.

```
void set_return_type(CORBA::TypeCode_ptr tc) ;
```

This method sets the TypeCode of the return value that is expected. You must set the return value's type before using the invoke method or one of the send methods.

Parameter	Description
<code>tc</code>	The return value's type.

```
void send_deferred() ;
```

Like the invoke method, this method sends this Request to the object implementation. Unlike the invoke method, this method does not block waiting for a response. The client application can retrieve the response using the get_response method.

```
void send_oneway() ;
```

This method invokes this Request as a *oneway* operation. Oneway operations do not block and do not result in a response being sent from the object implementation to the client application.

```
CORBA::Object_ptr target() const;
```

This method returns a reference to the target object on which this request will operate.

```
static CORBA::Request_ptr  
  duplicate(CORBA::Request_ptr ptr) ;
```

This static method increments the reference count for the specified object and then returns a pointer to that object.

Parameter	Description
<code>ptr</code>	The object to be duplicated.

```
static CORBA::Request_ptr nil() ;
```

This static method returns a NULL pointer that can be used to initialize a CORBA::Request_ptr object.

```
static void release(CORBA::Request_ptr ptr) ;
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
<code>ptr</code>	The object to be released.

ServerRequest

The ServerRequest class is used to represent an operation request received by an object implementation that is using the Dynamic Skeleton

Interface. When the POA receives a client operation request, it invokes the object implementation's `invoke` method and passes an object of this type.

This class provides the methods needed by the object implementation to determine the operation being requested and the arguments. It also provides methods for setting the return value and reflecting exceptions to the client application.

You should never attempt to free memory associated with any value returned by this class.

Include file

The `corba.h` file should be included when you use this class.

ServerRequest methods

`void arguments(CORBA::NVList_ptr param);`

This method sets the parameter list for this request.

Parameter	Description
params	The parameter list to be filled in. You must initialize this list with the appropriate number of Any objects and set their type and flag values prior to invoking this method.

`CORBA::Context_ptr ctx()`

This method returns the Context object associated with the request.

Caution

You should never release the memory associated with this method's return value.

`void exception(CORBA::Any_ptr exception);`

This method is used to reflect the specified exception to the client application.

Parameter	Description
exception	The exception that was raised. If this pointer is NULL, a CORBA::UnknownUserException is reflected.

`const char *operation() const;`

Returns the name of the operation being requested.

`const char* op_name() const`

This method returns the name of the operation associated with the request. The object implementation uses this name to determine if the request is valid, to perform the appropriate processing to fulfill the request, and to return the appropriate value to the client.

```
void params(CORBA::NVList_ptr params) ;
```

This method accepts an NVList object initialized with the appropriate number of Any objects. The method fills the NVList in with the parameters supplied by the client.

Parameter	Description
params	The parameter list to be filled in. You must initialize this list with the appropriate number of Any objects and set their type and flag values prior to invoking this method.

```
void result(CORBA::Any_ptr result) ;
```

This method sets the result that is to be reflected to the client application.

Parameter	Description
result	An Any object representing the return value.

```
void set_exception(const CORBA::Any& a) ;
```

This method sets the exception that is to be reflected to the client application.

Parameter	Description
a	An Any object representing the exception.

```
void set_result(const CORBA::Any& a) ;
```

This method sets the result that is to be reflected to the client application.

Parameter	Description
a	An Any object representing the return value.

```
static CORBA::ServerRequest_ptr  
  _duplicate(CORBA::ServerRequest_ptr ptr) ;
```

This static method increments the reference count for the specified object and then returns a pointer to the object.

Parameter	Description
ptr	The object to be duplicated.

```
static CORBA::ServerRequest_ptr _nil() ;
```

This static method returns a NULL pointer that can be used for initialization purposes.

```
static void _release(CORBA::ServerRequest *ptr) ;
```

This static method decrements the reference count for the specified object. When the count reaches zero, all memory managed by the object is released and the object is deleted.

Parameter	Description
ptr	The object to be released.

TCKind

```
enum TCKind
```

This enumeration describes the various types that a `TypeCode` object, described in “[TypeCode](#)” on page 76, may represent.

The values are shown in the following table.

Name	Meaning
<code>tk_abstract_interface</code>	abstract interface
<code>tk_alias</code>	alias
<code>tk_any</code>	Any
<code>tk_array</code>	array
<code>tk_boolean</code>	boolean
<code>tk_char</code>	char
<code>tk_double</code>	double
<code>tk_enum</code>	enum
<code>tk_except</code>	exception
<code>tk_fixed</code>	fixed type
<code>tk_float</code>	float
<code>tk_long</code>	long
<code>tk_longdouble</code>	long double
<code>tk_longlong</code>	long long
<code>tk_native</code>	native type
<code>tk_null</code>	NULL
<code>tk_objref</code>	object reference
<code>tk_octet</code>	octet string
<code>tk_Principal</code>	Principal
<code>tk_sequence</code>	sequence
<code>tk_short</code>	short
<code>tk_string</code>	string
<code>tk_struct</code>	struct
<code>tk_TypeCode</code>	TypeCode
<code>tk_ulonglong</code>	unsigned long long
<code>tk_union</code>	union
<code>tk_ulong</code>	unsigned long
<code>tk_ushort</code>	unsigned short
<code>tk_value</code>	value
<code>tk_value_box</code>	value box
<code>tk_void</code>	void
<code>tk_wchar</code>	Unicode character
<code>tk_wstring</code>	Unicode string

TypeCode

```
class CORBA::TypeCode
```

The TypeCode class represents the various types that can be defined in IDL. Type codes are most often used to define the type of value being stored in an Any object, described in [“Any” on page 49](#). Type codes may also be passed as parameters to method invocations.

TypeCode objects can be created using the various CORBA::ORB.create_<type>_tc methods, whose description begins in [“Core interfaces and classes”](#). You may also use the constructors listed here.

Include file

Include the **corba.h** file when you use this class.

TypeCode constructors

```
CORBA::TypeCode(CORBA::TCKind kind, CORBA::Boolean  
is_constant);
```

This method constructs a TypeCode object for types that do not require any additional parameters. A BAD_PARAM exception is raised if kind is not a valid type for this constructor.

Parameter	Description
kind	Describes the type of object being represented. Must be one of the following: CORBA::tk_null, CORBA::tk_void, CORBA::tk_short, CORBA::tk_long, CORBA::tk_ushort, CORBA::tk_ulong, CORBA::tk_float, CORBA::tk_double, CORBA::tk_boolean, CORBA::tk_char, CORBA::tk_octet, CORBA::tk_any, CORBA::tk_TypeCode, CORBA::tk_Principal, CORBA::tk_longlong, CORBA::tk_ulonglong, CORBA::tk_longdouble, or CORBA::tk_wchar, CORBA::tk_fixed, CORBA::tk_value, CORBA::tk_value_box, CORBA::native, CORBA::tk_abstract_interface.
is_constant	If TRUE, the type is to be considered a constant. Otherwise, the object is not a constant.

TypeCode methods

```
CORBA::TypeCode_ptr content_type() const;
```

This method returns the TypeCode of the elements in a sequence or array. It also will return the type of an alias. A BadKind exception is raised if this object's kind is not CORBA::tk_sequence, CORBA::tk_array, or CORBA::tk_alias.

```
CORBA::Long default_index() const;
```

This method returns the default index of a TypeCode representing a union. If this object's kind is not CORBA::tk_union, a BadKind exception is raised.

```
CORBA::TypeCode_ptr discriminator_type() const;
```

This method returns the discriminator type of a TypeCode representing a union. If this object's kind is not CORBA::tk_union, a BadKind exception is raised.

```
CORBA::Boolean equal(CORBA::TypeCode_ptr tc) const;
```

This method compares this object with the specified TypeCode. If they match in every respect, TRUE is returned. Otherwise, FALSE is returned.

Parameter	Description
tc	The object to be compared to this object.

```
const char* id() const;
```

This method returns the repository identifier of the type being represented by this object. If the type being represented does not have a repository identifier, a BadKind exception is raised. Types that have a repository identifier include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_alias
- CORBA::tk_except
- CORBA::tk_objref

```
CORBA::TCKind kind() const
```

This method returns this object's kind.

```
CORBA::ULong length() const;
```

This method returns the length of the string, sequence, or array represented by this object. The length of a string is the number of characters. The length of an array or sequence is the number of elements. A BadKind exception is raised if this object's kind is not CORBA::tk_string, CORBA::tk_sequence, or CORBA::tk_array.

```
CORBA::ULong member_count() const;
```

This method returns the member count of the type being represented by this TypeCode object. If the type being represented does not have members, a BadKind exception is raised. Types that have members include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_except

```
CORBA::Any_ptr member_label(CORBA::ULong index) const;
```

This method returns the label of the member with the specified index from a TypeCode object for a union. If this object's kind is not CORBA::tk_union, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised.

Parameter	Description
-----------	-------------

index	The label of the union member whose type is to be returned. This index is zero-based.
-------	---

```
const char *member_name(CORBA::ULong index) const;
```

This method returns the name of the member with the specified index from the type being represented by this object. If the type being represented does not have members, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised.

Types that have members include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_except

Parameter	Description
-----------	-------------

index	The zero-based index of the member whose name is to be returned.
-------	--

```
CORBA::TypeCode_ptr member_type(CORBA::ULong index) const;
```

This method returns the type of the member with the specified index from the type being represented by this object. If the type being represented does not have members with types, a BadKind exception is raised. If the index is invalid, a Bounds exception is raised. Types that have members include:

- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_except

Parameter	Description
-----------	-------------

index	The zero-based index of the member whose name is to be returned.
-------	--

```
const char *name() const;
```

This method returns the name of the type represented by this object. If the type does not have a name, a BadKind exception is raised. Types that have a name include:

- CORBA::tk_objref
- CORBA::tk_struct
- CORBA::tk_union
- CORBA::tk_enum
- CORBA::tk_alias

- CORBA::tk_except

```
static CORBA::TypeCode_ptr _duplicate(
    CORBA::TypeCode_ptr obj);
```

This static method duplicates the specified TypeCode object.

Parameter	Description
obj	The object to be duplicated.

```
static CORBA::TypeCode_ptr _nil();
```

This static method returns a NULL TypeCode pointer that can be used for initialization purposes.

```
static void _release(CORBA::TypeCode_ptr obj);
```

This static method decrements the reference count to the specified object. When the reference count is zero, it also frees all memory that it is managing and then deletes the object.

Parameter	Description
obj	The object to be released.

```
CORBA::Boolean equivalent (CORBA_TypeCode_ptr tc)
    const;
```

The equivalent operation is used by the ORB when determining the type equivalence for values stored in an IDL.

```
CORBA_TypeCode_ptr get_compact_typecode() const;
```

The get_compact_code operation strips out all optional name & member name fields, but it leaves all alias typecodes intact.

```
virtual CORBA::Visibility
member_visibility(CORBA::ULong index) const;
```

This method returns the Visibility of the valuetype member identified by index.

Note

The member_visibility operation can only be invoked on valuetype TypeCodes, not on valueboxes (or boxed values).

```
virtual CORBA::ValueModifier type_modifier() const;
```

The type_modifier operations can only be invoked on non-boxed valuetype TypeCodes. This method returns the ValueModifier that applies to the valuetype represented by the target TypeCode.

```
virtual CORBA::TypeCode_ptr concrete_base_type()
```

The concrete_base_type operations can only be invoked on non-boxed valuetype TypeCodes. If the value represented by the target TypeCode has a concrete base valuetype, this method returns a TypeCode for the concrete base, otherwise it returns a nil TypeCode reference.

Interface repository interfaces and classes (C++)

This section describes the classes and interfaces that you can use to access the interface repository. The interface repository maintains information on modules and the interfaces they contain as well as other types like operations, attributes, and constants.

AliasDef

```
class CORBA::AliasDef : public CORBA::TypedefDef
```

This class is derived from the `TypedefDef` class and represents an alias for a `typedef` that is stored in the interface repository. This class provides methods for setting and obtaining the `IDLType` of the original `typedef`.

For more information on the `TypedefDef` class, go to [“TypedefDef” on page 111](#) for more information. For more information on the `IDLType` class, go to [“IDLType” on page 98](#) for more information.

AliasDef methods

```
CORBA::IDLType original_type_def();
```

This method returns the `IDLType` of the original `typedef` for which this object is an alias.

```
void original_type_def(CORBA::IDLType_ptr val);
```

This method sets the `IDLType` of the original `typedef` for which this object is an alias.

Parameter	Description
val	The <code>IDLType</code> to set for this alias.

ArrayDef

```
class CORBA::ArrayDef : public CORBA::IDLType
```

This class is derived from the `IDLType` class and represents an array that is stored in the interface repository. It provides methods for setting and obtaining the type of the elements in the array as well as the length of the array.

ArrayDef methods

```
CORBA::TypeCode element_type();
```

This method returns the `TypeCode` of the array's elements.

```
CORBA::IDLType_ptr element_type_def();
```

This method returns the IDLType of the elements stored in this array.

```
void element_type_def(CORBA::IDLType_ptr  
element_type_def);
```

This method sets the IDLType of the elements stored in the array.

Parameter	Description
element_type_def	The IDLType of the elements in the array.

```
CORBA::ULong length();
```

This method returns the number of elements in the array.

```
void length(CORBA::ULong length);
```

This method sets the number of elements in the array.

Parameter	Description
length	The number of elements in the array.

AttributeDef

```
class CORBA::AttributeDef : public CORBA::Contained,  
public CORBA::Object
```

The class is used to represent an interface attribute that is stored in the interface repository. It provides methods for setting and obtaining the attribute's mode, `typedef`. A method is also provided for obtaining the attribute's type.

AttributeDef methods

```
CORBA::AttributeMode mode();
```

This method returns the mode of the attribute. The return value will be either `CORBA::AttributeMode ATTR_READONLY` for read only attributes or `CORBA::AttributeMode ATTR_NORMAL` for read-write ones. Go to “[AttributeMode](#)” on page 83 for more information.

```
void mode(CORBA::AttributeMode _val);
```

This method sets the mode of the attribute.

Parameter	Description
_val	The mode to set.

```
CORBA::TypeCode_ptr type();
```

This method returns the TypeCode that represents the attribute's type.

```
CORBA::IDLType_ptr type_def();
```

This method returns this object's IDLType.

```
void type_def(CORBA::IDLType_ptr type_def);
```

This method sets the IDLType for this object.

Parameter	Description
type_def	The IDLType of this object.

AttributeDescription

```
struct CORBA::AttributeDescription
```

The AttributeDescription structure describes an attribute that is stored in the interface repository.

AttributeDescription members

```
CORBA::Identifier_var name
```

The name of the attribute.

```
CORBA::RepositoryId_var id
```

The repository id of the attribute.

```
CORBA::RepositoryId_var defined_in
```

The repository id of the interface in which this attribute is defined.

```
CORBA::String_var version
```

The attribute's version.

```
CORBA::TypeCode_var type
```

The attribute's IDL type.

```
CORBA::AttributeMode mode
```

The mode of this attribute.

AttributeMode

```
enum CORBA::AttributeMode
```

The enumeration defines the values used to represent the mode of an attribute; either read-only or normal (read-write).

AttributeMode values

Constant	Represents
ATTR_NORMAL	This is a read-write attribute.
ATTR_READONLY	This is a read-only attribute.

ConstantDef

```
class CORBA::ConstantDef : public CORBA::Contained
```

The class is used to represent a constant definition that is stored in the interface repository. This interface provides methods for setting and obtaining the constant's type, value, and typeid.

ConstantDef methods

```
CORBA::TypeCode_ptr type();
```

This method returns the TypeCode representing the object's type.

```
CORBA::IDLType_ptr type_def();
```

This method returns this object's IDLType.

```
void type_def(CORBA::IDLType_ptr type_def);
```

This method sets the IDLType of the constant.

Parameter	Description
type_def	The IDLType of this constant.

```
CORBA::Any *value();
```

This method returns a pointer to an Any object representing this object's value.

```
void value(CORBA::Any& _val);
```

This method sets the value of this constant.

Parameter	Description
_val	An Any object that represents this object's value.

ConstantDescription

```
struct CORBA::ClassName
```

The ConstantDescription structure describes a constant that is stored in the interface repository.

ConstantDescription members

```
CORBA::Identifier_var name
```

The name of the constant.

```
CORBA::RepositoryId_var id
```

The repository id of the constant.

```
CORBA::RepositoryId_var defined_in
```

The name of the module or interface in which this constant is defined.

```
CORBA::String_var version
```

The constant's version.

```
CORBA::TypeCode_var type
```

The constant's IDL type.

```
CORBA::Any value
```

The value of this constant.

Contained

```
class CORBA::Contained : public CORBA::IObject, public  
    CORBA::Object
```

The Contained class is used to derive all interface repository objects that are themselves contained within another interface repository object. This class provides methods for:

- Setting and retrieving the object's name and version.
- Determining the Container that contains this object.
- Obtaining the object's absolute name, containing repository, and description.
- Moving an object from one container to another.

Include file

Include the file **corba.h** when you use this class.

```
interface Contained: IObject {  
    attribute RepositoryId id;  
    attribute Identifier name;  
    attribute String_var version;  
  
    readonly attribute Container defined_in;  
    readonly attribute ScopedName absolute_name;  
    readonly attribute Repository containing_Repository;  
    struct Description {  
        DefinitionKind kind;  
        any value;  
    };  
    Description describe();  
    void move(  
        in Container new(Container,  
        in Identifier new_name,  
        in String_var new_version  
    );  
};
```

Contained methods

```
CORBA::String_var absolute_name();
```

This method returns the absolute name, which is the name that uniquely identifies this object within its containing Repository. If the object's `defined_in` attribute (set when the object is created) references a Repository, then the absolute name is simply the object's name preceded by the string "::".

```
CORBA::Repository_ptr containing_repository();
```

Returns a pointer to the repository that contains this object.

```
CORBA::Container_ptr defined_in();
```

Returns a pointer to the Container where this object is defined.

```
Description* describe();
```

Returns this object's Description. Go to “[Description](#) on page 93” for more information on the Description structure.

```
CORBA::String_var id();
```

Returns this object's repository identifier.

```
void id(const char *id) ;
```

Sets the repository identifier that uniquely identifies this object.

Parameter	Description
<code>id</code>	The repository identifier for this object.

```
CORBA::String_var name();
```

This method returns the name which uniquely identifies the object within the scope of its container.

```
void name(const char * val) ;
```

This method sets the name of the contained object.

Parameter	Description
<code>name</code>	The object's name.

```
CORBA::String_var version() ;>
```

This method returns the object's version. The version distinguishes this object from other objects that have the same name.

```
void version(CORBA::String_var& val) ;
```

This method sets this object's version.

Parameter	Description
<code>val</code>	The object's version.

```
void move(CORBA::Container_ptr new_container, const  
char *new_name, CORBA::String_var& new_version) ;
```

Moves this object from its current Container to the new_container.

Parameter	Description
<code>new_container</code>	The Container to which this object is being moved.
<code>new_name</code>	The new name for the object.
<code>new_version</code>	The new version specification for the object.

Container

```
class CORBA::Container : public CORBA::Container,
    public CORBA::Object
```

The Container class is used to create a containment hierarchy in the interface repository. A Container object holds object definitions derived from the Contained class. All object definitions derived from the Container class, with the exception of the Repository class, also inherit from the Contained class.

The Container provides methods to create types of IDL types defined in **orbtypes.h**, including InterfaceDef, ModuleDef and ConstantDef classes, but not the ValueMemberDef class. The `defined_in` attribute of each definition that is created is initialized to point to this object.

Include file

The `corba.h` file should be included when you use this class.

```
interface Container: IRObject {
    Contained lookup(in ScopedName search_name);
    ContainedSeq contents(
        in DefinitionKind limit_type,
        in boolean exclude_inherited
    );
    ContainedSeq lookup_name(
        in Identifier search_name,
        in long levels_to_search,
        in CORBA::DefinitionKind limit_type,
        in boolean exclude_inherited
    );
    struct Description {
        Contained Contained_object;
        DefinitionKind kind;
        any value;
    };
    typedef sequence<Description> DescriptionSeq;
    DescriptionSeq describe_contents(
        in DefinitionKind limit_type,
        in boolean exclude_inherited,
        in long max_returned_objs
    );
}
```

Container methods

```
CORBA::AbstractInterfaceDef_ptr create_abstract_interface(  
    const char* _arg_id,  
    const char* _arg_name,  
    const char* _arg_name,  
    const char* _arg_version,  
    const CORBA_AbstractInterfaceDefSeq& _arg_base_interfaces)
```

This method creates an AbstractInterfaceDef object with the specified attributes in the Container and returns a pointer to the newly created object.

Parameter	Description
id	The interface id.
name	The interface name.
version	The interface version.
base_interfaces	A list of all abstract interfaces from which this interface inherits.

```
CORBA::ContainedSeq * contents(CORBA::DefinitionKind  
    limit_type, CORBA::Boolean exclude_inherited);
```

This method returns the list of definitions of contained objects that are either directly contained or inherited into the container. You can use this method to navigate through the hierarchy of object definitions in the Repository. This method returns all object definitions contained by modules in the Repository, followed by all object definitions contained within each of those modules.

Parameter	Description
limit_type	The interface object types to be returned. If you specify <code>dk_all</code> , objects of all types are returned.
exclude_inherited	If set to TRUE, inherited objects are not returned.

```
CORBA::AliasDef_ptr create_alias(const char * id,  
    const char *name,  
    const CORBA::String_var& version,  
    CORBA::IDLType_ptr original_type);
```

This method creates an AliasDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The alias's id.
name	The alias's name.
version	The alias's version.
original_type	The type of the object for which this object is an alias.

```
CORBA::ConstantDef_ptr create_constant(const char * id,  
    const char *name,  
    const CORBA::String_var& version,
```

```
CORBA::IDLType_ptr type,
const CORBA::Any& value);
```

This method creates a ConstantDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The constant's id.
name	The constant's name.
version	The constant's version.
type	The type of the value specified below.
value	The constant's value.

```
CORBA::EnumDef_ptr create_enum(const char * id,
                               const char *name, const CORBA::String_var& version,
                               const CORBA::EnumMemberSeq& members);
```

This method creates an EnumDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The enumeration's id.
name	The enumeration's name.
version	The enumeration's version.
members	A list of the enumeration's fields.

```
CORBA::ExceptionDef_ptr create_exception(const char * id,
                                         const char *name,
                                         const CORBA::String_var& version,
                                         const CORBA::StructMemberSeq& members);
```

This method creates an ExceptionDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The exception's id.
name	The exception's name.
version	The exception's version.
members	The sequence for the structure's fields, if any.

```
CORBA::InterfaceDef_ptr create_interface(const char * id,
                                         const char *name,
                                         const CORBA::String_var& version,
                                         const CORBA::InterfaceDefSeq& base_interfaces);
```

This method creates an InterfaceDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The interface's id.
name	The interface's name.
version	The interface's version.
base_interfaces	A list of all interfaces that this interface inherits from.

```
CORBA::ModuleDef_ptr create_module(const char * id,
                                    const char *name,
                                    const CORBA::String_var& version) ;
```

This method creates a ModuleDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The module's id.
name	The module's name.
version	The module's version.

```
CORBA::StructDef_ptr create_struct(const char * id,
                                    const char *name,
                                    const CORBA::String_var& version,
                                    const CORBA::StructMemberSeq& members) ;
```

This method creates a StructureDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The structure's id.
name	The structure's name.
version	The structure's version.
members	The sequence for the structure's fields.

```
CORBA::UnionDef_ptr create_union(const char * id,
                                    const char *name,
                                    const CORBA::String_var& version,
                                    CORBA::IDLType_ptr discriminator_type,
                                    const CORBA::UnionMemberSeq& members) ;
```

This method creates a UnionDef object with the specified attributes in this Container and returns a pointer to the newly created object.

Parameter	Description
id	The Union's id.
name	The Union's name.
version	The Union's version.
discriminator_type	The type of the Union's discriminant value.
members	The sequence of each of the Union's fields.

```
CORBA::DescriptionSeq *  
describe_contents(CORBA::DefinitionKind limit_type,  
                  CORBA::Boolean exclude_inherited,  
                  CORBA::Long max_returned_objs) ;
```

This method returns a description for all definitions directly contained by or inherited into this container.

Parameter	Description
limit_type	The interface object types whose descriptions are to be returned. Specifying dk_all will return the descriptions for objects of all types.

Parameter	Description
exclude_inherited	If set to true, descriptions for inherited objects are not returned.
max_returned_objs	The maximum number of descriptions to be returned. If you set this parameter to -1, all objects are returned.

```
CORBA::Contained_ptr lookup(const char *search_name);
```

This method locates a definition relative to this container, given a scoped name. An absolute scoped name, one beginning with ":", may be specified to locate a definition within the enclosing repository. If no object is found, a NULL value is returned.

Parameter	Description
search_name	The object's interface name.

```
CORBA::ContainedSeq * lookup_name(const char
    *search_name,
    CORBA::Long levels_to_search, CORBA::DefinitionKind
    limit_type,
    CORBA::Boolean exclude_inherited);
```

This method locates an object by name within a particular object. The search can be constrained by the number of levels in the hierarchy to be searched, the object type, and whether inherited objects should be returned.

Parameter	Description
search_name	The contained object's name.
levels_to_search	The number of levels in the hierarchy to search. If you set this parameter to a value of -1, all levels are searched. If you set this parameter to 1, only this object is searched.
limit_type	The interface object types to be returned. Specifying dk_all will return objects of all types.
exclude_inherited	If set to true, inherited objects are not returned.

```
CORBA::ValueDef_ptr create_value(const char * id,
    const char *name,
    const char version,
    CORBA::boolean is_custom,
    CORBA::boolean is_abstract,
    const CORBA::ValueDef_ptr _base_value,
    CORBA::boolean is_truncatable,
    const CORBA::ValueDefSeq& abstract_base_values,
    const CORBA::InterfaceDefSeq& supported_interfaces,
    const CORBA.InitializerSeq& initializers)
```

This method creates a ValueDef object with the specified attributes in this Container and returns a reference to the newly created object.

Parameter	Description
id	The structure's repository id.
name	The structure's name.
version	The structure's version.
is_custom	If set to true, creates a custom valuetype.
is_abstract	If set to true, creates and abstract valuetype.

Parameter	Description
base_values	The list of supported base values.
is_truncatable	If set to true, creates a truncatable valuetype.
abstract_base_values	The list of supported abstract base values.
supported_interfaces	The list of supported interfaces.
initializer	The list of initializers this value type supports

```
CORBA::ValueBoxDef_ptr create_value_box(const char* id,
                                         const char* name, const char* version,
                                         CORBA::IDLType_ptr original_type)
```

This method creates a ValueBoxDef object in this Container with the specified attributes and returns a reference to the newly created object.

Parameter	Description
id	The structure's repository id.
name	The structure's name.
version	The structure's version.
original_type	The IDL type of the original object for which this is an alias.

DefinitionKind

```
enum CORBA::DefinitionKind
```

The constants in the DefinitionKind enumeration define the possible types of interface repository objects.

DefinitionKind values

Constant	Represents
dk_none	Exclude all types (used in repository lookup methods)
dk_all	All possible types (used in repository lookup methods)
dk_Alias	Alias
dk_Array	Array
dk_Attribute	Alias
dk_Constant	Constant
dk_Enum	Enum
dk_Exception	Exception
dk_Fixed	Fixed
dk_Interface	Interface
dk_Module	Module
dk_Native	Native
dk_Operation	Interface Operation
dk_Primitive	Primitive type (such as int or long)
dk_Repository	Repository
dk_Sequence	Sequence
dk_String	String

Constant	Represents
dk_Struct	Struct
dk_Typedef	Typedef
dk_Union	Union
dk_Value	ValueType
dk_ValueBox	ValueBox
dk_ValueMember	ValueMember
dk_Wstring	Unicode string

Description

```
struct CORBA::Container::Description
```

This structure provides a generic description for items in the interface repository that are derived from the Contained class.

Description members

```
CORBA::Contained_var contained_object
```

The object contained in this struct.

```
CORBA::DefinitionKind kind
```

The object's kind.

```
CORBA::Any value
```

The object's value.

EnumDef

```
class CORBA::EnumDef : public CORBA::TypedefDef, public CORBA::Object
```

The class is used to describe an enumeration stored in the interface repository. This interface provides methods for setting and retrieving the enumeration's list of members.

EnumDef methods

```
CORBA::EnumMemberSeq *members();
```

This method returns the enumeration's list of members.

```
void members(CORBA::EnumMemberSeq members);
```

This method sets the enumeration's list of members.

Parameter	Description
members	The list of members.

ExceptionDef

```
class ExceptionDef : public CORBA::Contained
```

The class is used to describe an exception that is stored in the interface repository. This class provides methods for setting and retrieving the exception's list of members as well as a method for retrieving the exception's TypeCode.

ExceptionDef methods

```
CORBA::StructMemberSeq *members() ;
```

This method returns this exception's list of members.

```
void members(CORBA::StructMemberSeq& members) ;
```

This method sets the exception's list of members.

Parameter	Description
<code>members</code>	The list of members.

```
CORBA::TypeCode_ptr type() ;
```

This method returns the TypeCode that represents this exception's type.

ExceptionDescription

```
struct CORBA::ExceptionDescription
```

This structure is used to describe an exception that is stored in the interface repository.

ExceptionDescription members

```
CORBA::String_var defined_in
```

The repository Id of the module or interface in which this exception is defined.

```
CORBA::String_var id
```

The repository id of the exception.

```
CORBA::String_var name
```

The name of the exception.

```
CORBA::TypeCode_var type
```

The exception's IDL type.

```
CORBA::String_var version
```

The exception's version.

FixedDef

```
CORBA::FixedDef public CORBA::IDLType, public  
CORBA::Object
```

This interface is used to describe a fixed definition that is stored in the Interface Repository.

Methods

```
CORBA::UShort digits();
```

This method sets the number of digits for the fixed type.

```
void digits(CORBA::UShort _digits);
```

This method sets the attribute for fixed type.

```
CORBA::Short scale();
```

This method sets the scale for the fixed type.

```
void scale(CORBA::Short _scale);
```

This method sets the attribute for the fixed type.

FullInterfaceDescription

```
struct CORBA::FullInterfaceDescription
```

The FullInterfaceDescription structure describes an interface that is stored in the interface repository.

FullInterfaceDescription members

```
CORBA::String_var Name
```

The name of the interface.

```
CORBA::String_var id
```

The repository id of the interface.

```
CORBA::String_var defined_in
```

The name of the module or interface in which this interface is defined.

```
CORBA::String_var version
```

The interface's version.

```
CORBA::OpDescriptionSeq operations
```

The list of operations supported by this interface.

```
CORBA::AttrDescriptionSeq attributes
```

The list of attributes contained in this interface.

```
CORBA::RepositoryIdSeq base_interfaces
```

The interfaces from which this interface inherits.

```
CORBA::RepositoryIdSeq derived_interfaces
```

The interfaces derived from this interface.

```
CORBA::TypeCode_var type
```

This interface's TypeCode.

```
CORBA::Boolean is_abstract
```

Indicates whether or not this interface is abstract.

FullValueDescription

```
struct CORBA::FullValueDescription
```

This structure is used to represent a full value definition that is stored in the Interface Repository.

Variables

CORBA::String_var **name**

The name of the valuetype.

CORBA::String_var **id**

The repository id of the valuetype.

CORBA::Boolean **is_abstract**

If this variable is true, specifies an abstract valuetype.

CORBA::Boolean **is_custom**

If this variable is true, specifies custom marshalling for the valuetype.

CORBA::String_var **defined_in**

The repository Id of the module in which this valuetype is defined.

CORBA::String_var **version**

The valuetype's version.

CORBA::OpDescriptionSeq **operations**

The list of operations offered by the valuetype.

CORBA::AttrDescriptionSeq **attributes**

The valuetype's list of valuetype's member attributes.

CORBA::ValueMemberSeq **members**

The array of value definitions.

CORBA::InitializerSeq **initializers**

The array of initializers.

CORBA::RepositoryIdSeq **supported_interfaces**;

The list of supported interfaces.

CORBA::RepositoryIdSeq **abstract_base_values**;

The list of abstract value types from which this valuetype inherits.

CORBA::Boolean **is_truncatable**;

If this variable is set to true, the value can be truncated to its base valuetype safely.

```
CORBA::String_var base_values;
```

The description of the value type from which this valuetype inherits.

```
CORBA::TypeCode_var type
```

The valuetype's IDL type code.

IDLType

```
class CORBA::IDLType : public CORBA::IRObjet, public  
    CORBA::Object
```

The IDLType class provides an abstract interface that is inherited by all interface repository definitions that represent IDL types. This class provides a method for returning an object's Typecode, which identifies the object's type. The IDLType is unique; the Typecode is not.

Include file

You should include the file **corba.h** when using this class.

```
interface IDLType: IRObjet {  
    readonly attribute TypeCode type;  
};
```

IDLType methods

```
CORBA::Typecode_ptr type();
```

This method returns the typecode of the current IRObjet.

InterfaceDef

```
class CORBA::InterfaceDef : public CORBA::Container,  
    public CORBA::Contained, public CORBA::IDLType
```

The InterfaceDef class is used to define an ORB object's interface that is stored in the interface repository.

For more information, see “[Container](#)” on page 87, “[Contained](#)” on page 85, and “[IDLType](#)” on page 98.

Include file

You should include the file **corba.h** when you use this class.

```
interface InterfaceDef: Container, Contained, IDLType {  
    typedef sequence<RepositoryId> RepositoryIdSeq;  
    typedef sequence<OperationDescription> OpDescriptionSeq;  
    typedef sequence<AttributeDescription> AttrDescriptionSeq;  
    attribute InterfaceDefSeq base_interfaces;  
    attribute boolean is_abstract;  
    readonly attribute InterfaceDefSeq  
        derived_interfaces;  
    boolean is_a(in RepositoryId interface_id);  
    struct FullInterfaceDescription {
```

```

Identifier name;
RepositoryId id;
RepositoryId defined_in;
String_var version;
OpDescriptionSeq operations;
AttrDescriptionSeq attributes;
RepositoryIdSeq base_interfaces;
    RepositoryIdSeq derived_interfaces;
TypeCode type;
    boolean is_abstract;
};
FullInterfaceDescription describe_interface();
AttributeDef create_attribute(
    in RepositoryId id,
    in Identifier name,
    in String_var version,
    in IDLType type,
    in CORBA::AttributeMode mode
);
OperationDef create_operation(
    in RepositoryId id,
    in Identifier name,
    in String_var version,
    in IDLType result,
    in OperationMode mode,
    in ParDescriptionSeq params,
    in ExceptionDefSeq exceptions,
    in ContextIdSeq contexts
);
struct InterfaceDescription {
    Identifier name;
    RepositoryId id;
    RepositoryId defined_in;
    String_var version;
    RepositoryIdSeq base_interfaces;
    boolean is_abstract;
};

```

InterfaceDef methods

`CORBA::InterfaceDefSeq *base_interfaces();`

This method returns a list of interfaces from which this class inherits.

`void base_interfaces(const CORBA::InterfaceDefSeq& val);`

This method sets the list of the interfaces from which this class inherits.

Parameter	Description
<code>val</code>	The list of interfaces from which this interface inherits.

`CORBA::AttributeDef_ptr create_attribute(const char * id, const char * name, const CORBA::String_var&`

```
version, CORBA::IDLType_ptr type,
CORBA::AttributeMode mode) ;
```

This method returns a pointer to a newly created AttributeDef that is contained in this object. The id, name, version, type, and mode are set to the values specified.

Parameter	Description
id	The interface id to use.
name	The interface name to use.
version	The interface version to use.
mode	The interface mode. Go to “ AttributeMode ” on page 83 for a list of possible values.

```
CORBA::OperationDef_ptr create_operation(const char
    *id, const char *name, CORBA::String_var& version,
    CORBA::IDLType_ptr result,
    CORBA::OperationMode mode,
    const CORBA::ParDescriptionSeq& params,
    const CORBA::ExceptionDefSeq& exceptions,
    const CORBA::ContextIdSeq& contexts) ;
```

This method creates a new OperationDef that is contained by this object using the specified parameters. The defined_in attribute of the newly created OperationDef is set to identify this InterfaceDef.

Parameter	Description
id	The interface id for this operation.
name	The name of this operation.
version	The operation's version.
result	The IDL type returned by the operation.
mode	The mode of this operation--oneway or normal.
params	The list of parameters to pass to this operation.
exceptions	The list of exceptions raised by this operation.
contexts	Context lists are names of values expected in context and passed along with the request.

```
CORBA::InterfaceDef::FullInterfaceDescription
    *describe_interface();
```

This method returns the FullInterfaceDescription which describes this object's interface.

```
CORBA::Boolean is_a(const char * interface_id);
```

This method returns true if this interface is identical to or inherits from the specified interface directly or indirectly.

Parameter	Description
interface_id	The id of the interface to be checked against this interface.

InterfaceDescription

```
struct:CORBA:: InterfaceDescription
```

This structure describes an object that is stored in the interface repository.

InterfaceDescription members

CORBA::String_var **name**

The name of the interface.

CORBA::String_var **id**

The interface's repository identifier.

CORBA::String_var **defined_in**

The name of the repository Id in which the interface is defined.

CORBA::String_var **version**

The interface's version.

CORBA::RepositoryIdSeq **base_interfaces**

A list of base interfaces for this interface.

CORBA::Boolean **is_abstract**

Indicates whether or not this interface is abstract.

IROObject

class **IROObject** : CORBA::Object

The IROObject class offers the most generic interface for interface repository objects. The Container class, IDLType, Contained, and others are derived from this class.

Include file

You should include the file **corba.h** when you use this class.

```
interface IROObject {
    readonly attribute DefinitionKind def_kind;
    void destroy();
};
```

IROObject methods

CORBA::DefinitionKind **def_kind()**;

This method returns the type of this interface repository object. Go to “[DefinitionKind](#)” on page 92 for a list of possible types.

void destroy();

This method deletes this object from the interface repository. If this object is a Container, this method also deletes all of its contents. If the object is currently contained by another object, it is removed. The destroy method returns the Exception (CORBA::BAD_PARAM) when invoked on a PrimitiveDef or Repository object. The Repository class is described in “[Repository](#)” on page 107.

ModuleDef

```
class ModuleDef : CORBA::Container, CORBA::Contained
```

The class is used to represent an IDL module in the interface repository.

ModuleDescription

```
struct ModuleDescription
```

The ModuleDescription structure describes a module that is stored in the interface repository.

ModuleDescription members

```
CORBA::String_var name
```

The name of the module.

```
CORBA::String_var id
```

The repository id of the module.

```
CORBA::String_var defined_in
```

The name of the repository Id in which this module is defined.

```
CORBA::String_var version
```

The module's version.

NativeDef

```
class CORBA::NativeDef
```

This interface is used to represent a native definition that is stored in the Interface Repository.

OperationDef

```
class CORBA::OperationDef : public virtual  
    CORBA::Contained, public CORBA::Object
```

The OperationDef class contains information about an interface operation that is stored in the interface repository. This class is derived from the Contained class, which is described in “[Contained” on page 85](#). The inherited describe method returns a OperationDescription structure that provides complete information on the operation.

Include file

You should include the file **corba.h** when you use this class.

```
interface OperationDef: Contained {  
    typedef sequence<ParameterDescription>  
        ParDescriptionSeq;  
    typedef Identifier ContextIdentifier;  
    typedef sequence<ContextIdentifier> ContextIdSeq;  
    typedef sequence<ExceptionDef> ExceptionDefSeq;
```

```

    typedef sequence<ExceptionDescription>
ExcDescriptionSeq;
    readonly attribute TypeCode result;
    attribute IDLType result_def;
    attribute ParDescriptionSeq params;
    attribute CORBA::OperationMode mode;
    attribute ContextIdSeq contexts;
    attribute ExceptionDefSeq exceptions;

    readonly attribute OperationKind bind;
};

struct OperationDescription {
    Identifier name;
    RepositoryId id;
    RepositoryId defined_in;
    String_var version;
    TypeCode result;
    OperationMode mode;
    ContextIdSeq contexts;
    ParDescriptionSeq parameters;
    ExcDescriptionSeq exceptions;
};

```

OperationDef methods

`CORBA::ContextIdSeq * contexts();`

This method returns the list of context identifiers that apply to the operation.

`void context(const CORBA::ContextIdSeq& val);`

This method sets the list of context identifiers that apply to this operation.

Parameter	Description
<code>val</code>	The list of context identifiers.

`CORBA::ExceptionDefSeq * exceptions();`

This method returns the list of the exception types that can be raised by this operation.

`void exceptions(const CORBA::ExceptionDefSeq& val);`

This method sets the list of exception types that may be raised by this operation.

Parameter	Description
<code>val</code>	The list of exceptions that this operation may raise.

`CORBA::OperationMode mode();`

This method returns the mode of the operation represented by this OperationDef. The mode may be normal or oneway. Operations that have a normal mode are synchronous and return a value to the client application. Oneway operations do not block and no response is sent from the object implementation to the client.

```
void mode(CORBA::OperationMode val);
```

This method sets the mode of the operation.

Parameter	Description
val	The desired mode of this operation, either OP_ONEWAY or OP_NORMAL. Go to " "OperationMode" on page 105 for more information.

```
CORBA::ParDescriptionSeq * params();
```

This method returns a pointer to a list of ParameterDescription structures that describe the parameters to this OperationDef.

```
void params(const CORBA::ParDescriptionSeq& val);
```

This method sets the list of the ParameterDescription structures for this OperationDef. The order of the structures is significant and should correspond to the order defined in the IDL definition for the operation.

Parameter	Description
val	The list of ParameterDescription structures.

```
CORBA::TypeCode_ptr result();
```

This method returns a pointer to a TypeCode representing the type of the value returned by this Operation. The TypeCode is a read-only attribute.

```
CORBA::IDLType_ptr result_def();
```

This method returns a pointer to the definition of the IDL type returned by this OperationDef.

```
void result_def(CORBA::IDLType_ptr val);
```

This method sets the definition of the type returned by this OperationDef.

Parameter	Description
val	A pointer to the type definition to use.

OperationDescription

```
struct CORBA::OperationDescription
```

The OperationDescription structure describes an operation that is stored in the interface repository.

OperationDescription members

```
CORBA::String_var name
```

The name the of the operation.

```
CORBA::String_var id
```

The repository id of the operation.

```
CORBA::String_var defined_in
```

The repository id of the interface or valuetype in which this operation is defined.

```

CORBA::String_var version
The operation's version.

CORBA::TypeCode_var result
The operation's result.

CORBA::OperationMode mode
The operation's mode.

CORBA::ContextIdSeq contexts
The operation's associated context list.

CORBA::ParameterDescriptionSeq parameters
The operation's parameters.

CORBA::ExceptionDescriptionSeq exceptions
The exceptions that this operation may raise.

```

OperationMode

enum CORBA::OperationMode

The enumeration defines the values used to represent the mode of an operation; either oneway or normal. Oneway operations are those for which the client application does not expect a response. Normal requests involve a response being sent to the client by the object implementation that contains the results of the request.

OperationMode values

Constant	Represents
OP_NORMAL	A normal operation request.
OP_ONEWAY	A oneway operation request.

ParameterDescription

struct CORBA::ParameterDescription

The ParameterDescription structure describes a parameter for an operation that is stored in the interface repository.

ParameterDescription members

```

CORBA::String_var name
The name of the parameter.

CORBA::TypeCode_var type
The parameter's typecode.

CORBA::IDLType_var type_def
The parameter's IDL type.

CORBA::ParameterMode mode
The parameter's mode.

```

ParameterMode

```
enum CORBA::ParameterMode
```

The values that represent the possible modes of parameters to operations.

ParameterMode values

Constant	Represents
PARAM_IN	Parameter is for input from the client to the server.
PARAM_OUT	Parameter is for output of results from the server to the client.
PARAM_INOUT	Parameter may be used for both input from the client and output from the server.

PrimitiveDef

```
class PrimitiveDef : public CORBA::IDLType, public  
CORBA::Object
```

The class is used to describe a primitive (such as an `int` or a `long`) that is stored in the interface repository. It provides a method for retrieving what kind of primitive it is.

PrimitiveDef methods

```
CORBA::PrimitiveKind kind();
```

This method returns the kind of primitive represented by this object.

PrimitiveKind

```
enum CORBA::PrimitiveKind
```

The `PrimitiveKind` enumeration contains the constants that define the primitive types of objects that may be stored in the interface repository.

PrimitiveKind values

Constant	Represents
pk_null	Null value
pk_void	Void
pk_short	Short
pk_long	Long
pk_ushort	Unsigned short
pk_ulong	Unsigned long
pk_float	Float
pk_double	Double
pk_boolean	Boolean
pk_char	Character
pk_octet	Octet

Constant	Represents
pk_any	Any
pk_TypeCode	TypeCode
pk_Principal	Principal
pk_string	String
pk_objref	Object reference
pk_longlong	Long long
pk_ulonglong	Unsigned long long
pk_longdouble	Long double
pk_wchar	Unicode character
pk_wstring	Unicode string

Repository

```
class Repository : public CORBA::Container, public
    CORBA::Object
```

The Repository class provides access to the interface repository and is derived from the Container class. Go to “[Contained” on page 85](#) for more information.

Include file

You should include the file **corba.h** when using this class.

```
interface Repository: Container {
    Contained lookup_id(in RepositoryId search_id);
    PrimitiveDef get_primitive(in CORBA::PrimitiveKind
kind);
    StringDef create_string(in unsigned long bound);
    WStringDef create_wstring(in unsigned long bound)
    SequenceDef create_sequence(
        in unsigned long bound,
        in IDLType element_type
    );
    ArrayDef create_array(
        in unsigned long length,
        n IDLType element_type
    );
    FixedDef create_fixed(
        in unsigned short digits,
        in short scale
    );
};
```

Repository methods

```
CORBA::ArrayDef_ptr create_array(CORBA::ULong length,  
                                CORBA::IDLType_ptr element_type);
```

This method creates a new ArrayDef and returns a pointer to it.

Parameter	Description
<code>length</code>	The maximum number of elements in the array. This value must be greater than zero.
<code>element_type</code>	The IDLType of the elements in the array.

```
CORBA::SequenceDef_ptr create_sequence  
(CORBA::ULong bound,  
 CORBA::IDLType_ptr element_type);
```

This method creates a new SequenceDef object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum number of items in the sequence. This value must be greater than zero.
<code>element_type</code>	A pointer to the IDLType of the items in the sequence.

```
CORBA::StringDef_ptr create_string(CORBA::Ulong bound);
```

This method creates a new StringDef object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum length of the string. This value must be greater than zero.

```
CORBA::WstringDef_ptr create_wstring(CORBA::Ulong  
bound);
```

This method creates a new WstringDef object and returns a pointer to it.

Parameter	Description
<code>bound</code>	The maximum length of the string. This value must be greater than zero.

```
CORBA::PrimitiveDef_ptr  
get_primitive(CORBA::PrimitiveKind kind);
```

This method returns a reference to a PrimitiveKind.

Parameter	Description
<code>kind</code>	The reference to be returned.

```
CORBA::Contained_ptr lookup_id(const char * search_id);
```

This method searches for an object in the interface repository that matches the specified search id. If no match is found, a NULL value is returned.

Parameter	Description
<code>search_id</code>	The identifier to use for the search.

```
CORBA::FixedDef_ptr create_fixed(CORBA::UShort digits,  
                                CORBA::Short scale)
```

This method sets the number of digits and the scale for the fixed type.

Parameter	Description
Ushort digits	The number of digits for the fixed type.
short scale	The scale of the fixed type.

SequenceDef

```
class SequenceDef : public CORBA::IDLType, public  
                      CORBA::Object
```

The class is used to represent a sequence that is stored in the interface repository. This interface provides methods for setting and retrieving the sequence's bound and element type.

SequenceDef methods

```
CORBA::ULong bound()
```

This method returns the bounds of the sequence.

```
void bound(CORBA::ULong bound)
```

This method sets the bound of the sequence.

Parameter	Description
members	The list of members.

```
CORBA::TypeCode_ptr element_type();
```

This method returns the TypeCode of the elements in this sequence.

```
CORBA::IDLType_ptr element_type_def();
```

This method returns the IDL type of the elements in this sequence.

```
void element_type_def(CORBA::IDLType_ptr  
                      element_type_def);
```

This method sets the IDL type of the elements in this sequence.

Parameter	Description
element_type_def	The IDL type to set elements to.

StringDef

```
class StringDef : public CORBA::IDLType, public  
                      CORBA::Object
```

The class is used to describe Strings stored in the interface repository. This interface provides methods for setting and retrieving the bounds of the strings.

StringDef methods

```
CORBA::ULong bound();
```

This method returns the bounds of the String.

```
void bound(CORBA::ULong bound);
```

This method sets the bounds of the String.

Parameter	Description
bound	The list of members.

StructDef

```
class StructDef : public CORBA::TypedefDef, public  
CORBA::Container, public CORBA::Object
```

The class is used to represent a structure that is stored in the interface repository.

StructDef methods

```
CORBA::StructMemberSeq *members();
```

This method returns the structures's list of members.

```
void members(CORBA::StructMemberSeq& members);
```

This method sets the structure's list of members.

Parameter	Description
members	The list of members.

StructMember

```
struct CORBA::StructMember
```

This interface is used to define the member for the struct. It uses the name and type variables in the definition.

StructMember methods

```
CORBA::String_var name
```

The name of the type.

```
CORBA::TypeCode_var type
```

The type's IDL type.

```
CORBA::IDLType_var type_def
```

The IDL type's IDL type definition.

TypedefDef

```
class TypedefDef : public CORBA::Contained, public  
CORBA::IDLType, public CORBA::Object
```

This abstract base class represents a user-defined structure that is stored in the interface repository. The following interfaces all inherit from this class:

- “AliasDef” on page 81.
- “ExceptionDef” on page 94.
- “StructDef” on page 110.
- “UnionDef” on page 112.
- “WstringDef” on page 116.

TypeDescription

```
structure TypeDescription
```

The TypeDescription structure contains the information that describes a type for an operation stored in the interface repository.

TypeDescription members

```
CORBA::String_var name
```

The name of the type.

```
CORBA::String_var id
```

The repository id of the type.

```
CORBA::String_var defined_in
```

The name of the module or interface in which this type is defined.

```
CORBA::String_var version
```

The type's version.

```
CORBA::TypeCode_var type
```

The type's IDL type.

UnionDef

```
class UnionDef : public CORBA::TypedefDef, public  
    CORBA::Container, public CORBA::Object
```

This class is used to represent a Union that is stored in the interface repository. This class provides methods for setting and retrieving the union's list of members and discriminator type.

UnionDef methods

```
CORBA::TypeCode_ptr discriminator_type();
```

This method returns the TypeCode of the discriminator of the Union.

```
CORBA::IDLType_ptr discriminator_type_def();
```

This method returns the IDL type of the Union's discriminator.

```
void discriminator_type_def(CORBA::IDLType_ptr  
    discriminator_type_def);
```

This method sets the IDL type of the Union's discriminator.

Parameter	Description
discriminator_type_def	The list of members.

```
CORBA::UnionMemberSeq *members();
```

This method returns the Union's list of members.

```
void members(CORBA::UnionMemberSeq& members);
```

This method sets the Union's list of members.

Parameter	Description
members	The list of members.

UnionMember

```
struct CORBA::UnionMember
```

The UnionMember struct contains information that describes a Union that is stored in the interface repository.

UnionMember members

```
CORBA::String_var name
```

The name of the Union.

```
CORBA::Any label
```

The label of the Union.

```
CORBA::TypeCode_var type
```

The Union's typecode.

```
CORBA::IDLType_var type_def
```

The Union's IDL type.

ValueBoxDef

```
class ValueBoxDef public CORBA::Contained, public  
    CORBA::IDLType, public CORBA::Object
```

This interface is used as a simple valuetype that contains a single public member of any IDL type. ValueBoxDef is a simplified version of ValueType:

```
public valuetype <IDLType> value;
```

This declaration is almost equal to valuetype boxed type <IDLType> but ValueBoxDef is not the same as simple ValueTypeDef.

Methods

```
CORBA::IDLType_ptr original_type_def();
```

This method identifies the type being boxed.

```
void original_type_def(CORBA::IDLType_ptr  
    original_type_def);
```

This method sets the type being boxed.

ValueDef

```
class CORBA::ValueDef public CORBA::Container, public  
    CORBA::Contained, public CORBA::IDLType, public  
    CORBA::Object
```

This interface describes the IDL value type called a construct. This interface is very close to a class type. It represent a value definition that is stored in the Interface Repository.

Methods

```
CORBA::InterfaceDefSeq supported_interfaces();
```

This method lists the interfaces which this value type supports.

```
void supported_interfaces(const CORBA::interfaceDefSeq&  
    supported_interfaces);
```

This method sets the supported interfaces.

```
CORBA::InitializerSeq& initializers();
```

This method returns the list of initializers.

```
void initializers(const CORBA::InitializerSeq&  
    initializers);
```

This method sets the initializers.

```
CORBA.ValueDef_ptr base_value( );
```

This method describes the value types from which this value inherits.

```
void base_value(CORBA::ValueDef_ptr base_value);
```

This method sets the value types

```
CORBA.ValueDefSeq& abstract_base_values( );
```

This method returns the list of the abstract value types from which this value inherits.

```
void abstract_base_values(const CORBA::ValueDef [Seq& abstract_base_values]);
```

This method defines the abstract value type's base value.

```
CORBA::Boolean is_abstract( );
```

This method returns true if the value is an abstract value type.

```
void is_abstract(CORBA::Boolean is_abstract);
```

This method sets the valuetype to be an abstract value type.

```
CORBA::Boolean is_custom( );
```

This method returns true if the value uses custom marshalling.

```
void is_custom(CORBA::Boolean is_custom);
```

This method sets the custom marshalling for the value.

```
CORBA::Boolean is_truncatable( );
```

This method returns true if the value can be truncated from its base value safely.

```
void is_truncatable(CORBA::Boolean is_truncatable);
```

This method sets the truncated attribute for this value.

```
CORBA::Boolean is_a(const char* value_id);
```

This method returns true if the value on which it is invoked either is identical to or inherits, directly or indirectly from the interface or value defined by the **value_id** parameter. Otherwise it returns false.

```
CORBA::ValueDef_ptr FullValueDescription*  
describe_value();
```

This method returns a **FullValueDescription** describing the value including its operations and attributes.

```
CORBA::ValueMemberDef_ptr create_value_member(const
    Char* id, const Char* name, const Char* version,
    CORBA::IDLType_ptr type_def, CORBA::short access);
```

This method returns a new ValueMemberDef contained in the ValueDef on which it is invoked.

Parameter	Description
id	The repository id for this type.
name	The name of this type.
version	The object's version.
type_def	The value's IDL type.
short access	The access value.

```
CORBA::AttributeDef_ptr create_attribute(const Char*
    id, const Char* name, const Char* version,
    CORBA::IDLType_ptr type, CORBA::AttributeMode mode);
```

This method creates a new attribute definition for this valuetype and returns a new AttributeDef for it

Parameter	Description
id	The repository id for this type.
name	The name of this type.
version	The object's version.
type	The type's IDL type.
mode	The object's mode.

```
CORBA::OperationDef_ptr create_operation(const Char*
    id, const Char* name, const Char* version,
    CORBA::IDLType_ptr result, CORBA::OperationMode mode,
    const CORBA::ParDescriptionSeq& params, const
    CORBA::ExceptionDefSeq& exceptions, const
    CORBA::ContextIDSeq& contexts);
```

This method creates a new Operation for this valuetype and returns an OperationDef for it.

Parameter	Description
id	The repository id for this type.
name	The name of this type.
version	The object's version.
result	The IDL type of the operation.
mode	The object's mode.
params	The list of the operation's parameters.
exceptions	The list of the operation's exceptions.
contexts	The list of the operation's contexts.

ValueDescription

```
struct CORBA::ValueDescription
```

This interface describes a value type that is stored in the Interface Repository.

Values

CORBA::String_var **name**

The name of the type.

CORBA::String_var **id**

The repository id of the type.

CORBA::Boolean **is_abstract**

If this variable is true, the value is an abstract value type.

CORBA::Boolean **is_custom**

If this variable is true, the valuetype is custom marshalled.

CORBA::String_var **defined_in**.

The repository Id of the module in which this type is defined.

CORBA::String_var **version**

The type's version.

CORBA::RepositoryIdSeq& **supported_interfaces**

The list of interfaces which this value type supports.

CORBA::RepositoryIdSeq& **abstract_base_values**

The list of abstract value types from which this value inherits.

CORBA::Boolean **is_truncatable**

If this variable is true, the value type can be truncated to its base value type safely.

CORBA::String_var **base_value**

The value types from which this value inherits.

WstringDef

```
class WstringDef : public CORBA::IDLType, public  
CORBA::Object
```

This class is used to describe Unicode strings that are stored in the interface repository. It provides methods for setting and retrieving the bounds of a Unicode string.

WStringDef methods

CORBA::ULong **bound()** ;

This method returns the bounds of the Wstring.

void members(CORBA::ULong bound) ;

This method sets the bounds of the Wstring.

Parameter	Description
members	The list of members.

Activation interfaces and classes

This section describes the interfaces and classes used in the activation of object implementations.

ImplementationStatus

```
struct ImplementationStatus
```

ImplementationStatus is used to track the activation state for a server that is registered with the OAD.

```
module Activation
{
    . . .
    struct ImplementationStatus {
        extension::CreationImplDef    impl;
        ObjectStatusList      status;
    };
    . . .
};
```

Include file

Include the `oad_c.hh` file when you use this class.

ImplementationStatus members

```
CreationImplDef impl;
```

The OAD registration information for the object implementation.

```
ObjectStatusList status;
```

Represents a list of status information for each object offered by the server. See “[ObjectStatusList](#)” on page 122 for information on the `ObjectStatusList` class.

OAD

The OAD interface provides access to the OAD (Object Activation Daemon). It is used by the administration tools for listing, registering, and unregistered objects. It can also be used by client code for programmatic administration of the OAD.

The following code sample shows the OAD IDL:

```
interface OAD {
    extension::CreationImplDef create_CreationImplDef();

    Object reg_implementation(in extension::CreationImplDef impl)
        raises(DuplicateEntry, InvalidPath);

    extension::CreationImplDef get_implementation(
        in CORBA::RepositoryId repId,
        in string object_name)
        raises(NotRegistered);

    void change_implementation(
        in extension::CreationImplDef old_info,
        in extension::CreationImplDef new_info)
        raises(NotRegistered, InvalidPath, IsActive);

    attribute boolean destroy_on_unregister;

    void unreg_implementation(
        in CORBA::RepositoryId repId,
        in string object_name)
        raises(NotRegistered);

    void unreg_interface(in CORBA::RepositoryId repId)
        raises(NotRegistered);

    void unregister_all();

    ImplementationStatus get_status(
        in CORBA::RepositoryId repId,
        in string object_name)
        raises(NotRegistered);

    ImplStatusList get_status_interface(
        in CORBA::RepositoryId repId)
        raises(NotRegistered);

    ImplStatusList get_status_all();

    Object lookup_interface(in CORBA::RepositoryId repId, in long timeout)
        raises(NotRegistered, FailedToExecute,
              NotResponding, Busy);
    Object lookupImplementation(in CORBA::RepositoryId repId, in string
object_name, in long timeout)
        raises(NotRegistered, FailedToExecute,
              NotResponding, Busy);

    extension::CreationImplDef boa_activate_obj(
        in Object obj,
        in string repository_id,
        in long unique_id)
```

```

        raises(NotRegistered);

void boa_deactivate_obj(in Object obj,
    in string repository_id,
    in long unique_id)
    raises(NotRegistered);

string generated_command(in extension::CreationImplDef impl);

string generated_environment(in extension::CreationImplDef impl);

};

For a complete description of the IDL source codes, refer to the oad.idl file located in the VisiBroker installation in the following directory:
```

<install_dir>\idl\

Include file

Include the oad_c.hh file when you use this class.

OAD methods

```
void changeImplementation(const
extension::CreationImplDef& _old_info,
const extension::CreationImplDef& _new_info);
```

This method changes an objects implementation dynamically. You can use this method to change the registration's activation policy, path name, argument settings, and environment settings.

Parameter	Description
_old_info	The information you want to change.
_new_info	The information to replace the old info.

Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.
IsActive	The object implementation is currently running. Deactivate the object and then try to change its information.
InvalidPath	The implementation class or executable you specify cannot be located.

Caution

You cannot change information for a currently active implementation. Be sure to exercise caution when changing an object's implementation name and object name with this method. Doing so will prevent client applications from locating the object using the old name.

```
extension::CreationImplDef_ptr create_CreationImplDef();
```

Returns an instance of an extension::CreationImplDef_ptr object. You can then set its attributes as explained in “[CreationImplDef impl;](#)” on page 117.

```
void destroy_on_unregister(CORBA::Boolean val);
```

Sets the `destroy_on_unregister` attribute for the OAD.

Parameter	Description
<code>val</code>	If set to TRUE, any active implementations are shut down when they are unregistered. Otherwise, they will not be shut down when unregistered.

Note

Currently, this attribute cannot be set programmatically.

```
CORBA::Boolean destroy_on_unregister();
```

Returns the setting for the `destroy_on_unregister` attribute for an implementation. If the attribute is set to TRUE, any active implementations are shut down when unregistered.

```
extension::CreationImplDef_ptr getImplementation(const char *repId,  
const char *object_name);
```

This method retrieves information about implementations registered for the specified repository identifier and object name. It returns a `extension::CreationImplDef_ptr` object.

Parameter	Description
<code>repId</code>	The repository identifier.
<code>object_name</code>	The object name.

Exception	Description
<code>NotRegistered</code>	The object you specify is not registered. You must specify a registered object.

```
ImplementationStatus *get_status(const char *repId,  
const char *object_name);
```

This method retrieves the status information about implementations registered for the specified repository identifier and object name.

Parameter	Description
<code>repId</code>	The repository identifier.
<code>object_name</code>	The object name.

Exception	Description
<code>NotRegistered</code>	The object you specify is not registered. You must specify a registered object.

```
ImplStatusList *get_status_all();
```

Returns an `ImplStatusList` containing the status information for all implementations.

```
ImplStatusList *get_status_interface(cost char *repId);
```

This method gets the status information about implementations registered for the specified repository identifier.

Parameter	Description
repId	The repository identifier.
Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
: :CORBA::Object_ptr reg_implementation(  
    const extension::CreationImplDef& _impl);
```

This method registers an implementation with the OAD and the VisiBroker directory service.

Parameter	Description
_impl	The instance of CreationImplDef.
Exception	Description
DuplicateEntry	The object you specify is a duplicate entry. You must specify an unregistered object.
InvalidPath	The implementation class or executable you specify cannot be located.

```
void unregImplementation(const char *repId, const char  
    *object_name);
```

This method unregisters implementations by repository identifier and object name. If the `destroy_on_unregister` attribute is set to `true`, this method terminates all processes currently implementing the repository identifier and object name that is specified.

Parameter	Description
repId	The repository identifier.
object_name	The object name.
Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
void unregInterface(const char *repId);
```

This method unregisters all implementations for a repository identifier. If the `destroy_on_unregister` attribute is set to `true`, this method terminates all processes currently implementing the repository identifier specified.

Parameter	Description
repId	The repository identifier.
Exception	Description
NotRegistered	The object you specify is not registered. You must specify a registered object.

```
void unregister_all();
```

This method unregisters all implementations. Unless the attribute `destroy_on_unregister` is set to `true`, all active implementations continue to execute.

ObjectStatus

```
struct ObjectStatus
```

This structure is used to store information about a particular object offered by an object implementation that is registered with the OAD. This structure is returned by the `ObjectStatusList` class, described in “[ObjectStatusList](#)” on page 122.

```
module Activation
{
    .
    .
    struct ObjectStatus {
        long unique_id;
        State activation_state;
        Object objRef;
    };
    .
}
```

Include file

Include the `oad_c.hh` file when you use this class.

ObjectStatus members

```
CORBA::Long unique_id;
```

A unique identifier for the object.

```
State activation_state;
```

The object's current activation state. It can be one of these values:

- ACTIVE
- INACTIVE
- WAITING_FOR_ACTIVATION

```
CORBA::Object objRef;
```

The object whose state is represented in the structure.

ObjectStatusList

```
class ObjectStatusList
```

This class implements a list of `ObjectStatus` structures and is used to represent information about the objects offered by a server.

See also

[“ObjectStatus” on page 122.](#)

Include file

Include the `oad_c.hh` file when you use this class.

ObjectStatusList methods

`void length(CORBA::ULong len);`

Sets the length of the list.

Parameter	Description
<code>len</code>	The length of the list.

`CORBA::ULong length() const;`

Returns the length of the list.

`CORBA::ULong maximum() const;`

Returns the maximum length of the list.

`ObjectStatus& operator[](CORBA::ULong index);`

Returns the ObjectStatus structure with the specified index in the list.

Parameter	Description
<code>index</code>	The zero-based index of the item in the list.

Naming Service interfaces and classes (C++)

This section describes the interfaces and classes for the VisiBroker Naming Service (VisiNaming).

NamingContext

```
class _VISNMEXPORT NamingContext : public virtual  
CORBA_Object
```

This object is used to contain and manipulate a list of names that are bound to the VisiBroker ORB objects or to other NamingContext objects. Client applications use this interface to resolve or list all of the names within that context. Object implementations use this object to bind names to object implementations or to bind a name to a NamingContext object.

Include file

Include the file CosNaming_c.hh when using this class.

Code sample

The code sample below shows the IDL specification for the NamingContext.

```
module CosNaming {  
    interface NamingContext {  
        void bind(in Name n, in Object obj)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void rebind(in Name n, in Object obj)  
            raises(NotFound, CannotProceed, InvalidName);  
        void bind_context(in Name n, in NamingContext nc)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void rebind_context(in Name n, in NamingContext nc)  
            raises(NotFound, CannotProceed, InvalidName);  
        Object resolve(in Name n)  
            raises(NotFound, CannotProceed, InvalidName);  
        void unbind(in Name n)  
            raises(NotFound, CannotProceed, InvalidName);  
        NamingContext new_context();  
        NamingContext bind_new_context(in Name n)  
            raises(NotFound, CannotProceed, InvalidName,  
AlreadyBound);  
        void destroy()  
            raises(NotEmpty);  
        void list(in unsigned long how_many,  
                out BindingList bl,  
                out BindingIterator bi);  
    };  
};
```

NamingContext methods

```
virtual void bind(const Name& _n, CORBA::Object_ptr _obj);
```

If the parameter `_n` is a complex name, this method attempts to bind the specified Object to the specified Name by resolving the context associated with the first NameComponent and then binding the object to the new context using the following Name:

```
Name [NameComponent<sub>2</sub>, . . . ,  
NameComponent<sub>(n-1)</sub>, NameComponent<sub>n</sub>]
```

This recursive process of resolving and binding continues until the context associated with the NameComponent (`(n-1)`) is resolved and the actual name-to-object binding is stored. If parameter `_n` is a simple name, `_obj` will be bound to `_n` within this NamingContext.

Parameter	Description
<code>_n</code>	A Name, initialized with the desired name for the object.
<code>_obj</code>	The object to be bound.

This method may raise the following exceptions:.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void rebind(const Name& _n, CORBA::Object_ptr  
_obj);
```

This method is exactly the same as the bind method, except that it never raises the AlreadyBound exception. If the specified Name has already been bound to another object, this method replaces that binding with the new binding.

Parameter	Description
<code>_n</code>	A Name Structure, initialized with the desired name for the object.
<code>_obj</code>	The object to be rebound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual void bind_context(const Name& n, NamingContext_ptr nc);
```

This method is identical to the bind method, except that it associates the supplied Name with a NamingContext, not an arbitrary VisiBroker ORB object.

Parameter	Description
<u>n</u>	A Name structure initialized with the desired name for the naming context. The first (<i>n-1</i>) NameComponent structures in the sequence must resolve to a NamingContext.
<u>nc</u>	The NamingContext object to be bound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void rebind_context(const Name& n, NamingContext_ptr nc);
```

This method is exactly the same as the bind_context method, except that this method never raises the AlreadyBound exception. If the specified Name has already been bound to another naming context, this method replaces that binding with the new binding.

Parameter	Description
<u>n</u>	A Name structure, initialized with the desired name for the object.
<u>nc</u>	The NamingContext object to be rebound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual CORBA::Object _ptr resolve(const Name& _n);
```

This method attempts to resolve the specified Name and return an object reference. If parameter `_n` is a *simple name*, it is resolved relative to this NamingContext.

If `_n` is a *complex name*, it is resolved using the context associated with the first NameComponent. Next, the new context to resolve the following Name:

```
Name [NameComponent<sub>(2)</sub>, . . . ,  
NameComponent<sub>(n-1)</sub>, NameComponent<sub>n</sub>]
```

This recursive process continues until the object associated with the *nth* NameComponent is returned.

Parameter	Description
<code>_n</code>	A Name structure, initialized with the name for the desired object.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual void unbind(const Name& _n);
```

This method performs the inverse operation of the bind method, removing the binding associated with the specified Name.

Parameter	Description
<code>_n</code>	A Name structure, initialized with the desired name to be unbound.

The following exceptions may be raised by this method.

Exception	Description
NotFound	The Name, or one of its components, could not be found.

Exception	Description
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned naming context.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

```
virtual NamingContext_ptr new_context();
```

This method creates a new naming context. The newly created context is implemented within the same server as this object. The new context is initially not bound to any Name.

```
virtual NamingContext_ptr bind_new_context(const Name& _n)
    raises ;
```

This method creates a new context and binds it to the specified Name within this Context.

Parameter	Description
_n	A Name structure, initialized with the specified Name for the newly created NamingContext object.

The following exceptions can be raised by this method.

Exception	Description
NotFound	The Name or one of its components could not be found.
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned NamingContext.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.
AlreadyBound	The specified Name has already been bound to another object within the NamingContext.

```
virtual void destroy();
```

This method deactivates this naming context. Any subsequent attempt to invoke operations on this object raises a CORBA::OBJECT_NOT_EXIST runtime exception.

Before using this method, all Name objects that have been bound relative to this NamingContext should be unbound using the unbind method. Any attempt to destroy a NamingContext that is not empty raises a NotEmpty exception.

The following exceptions can be raised by this method.

Exception	Description
NotEmpty	The NamingContext to be destroyed is not empty.

```
virtual void list(CORBA::ULong _how_many, BindingList_out
    _bl,
    BindingIterator_out _bi)
```

This method returns all of the bindings contained by this context. A maximum of _how_many Names are returned with the BindingList. Any

left over bindings are returned via the `BindingIterator`. The returned `BindingList` and `BindingIterator` are described in detail in “[Binding and BindingList](#)” on page 132 and can be used to navigate the list of names.

Parameter	Description
<code>_how_many</code>	The maximum number of Names to be returned.
<code>_bl</code>	A list of Names returned to the caller. The number of names in the list will not exceed <code>how_many</code> .
<code>_bi</code>	An iterator for use in traversing the rest of the Names.

NamingContextExt

```
class _VISNMEXPORT NamingContextExt : public virtual  
    NamingContext, public virtual CORBA_Object
```

The `NamingContextExt` interface, which extends `NamingContext`, provides the operations required to use stringified names and URLs.

Include file

Included the naming file `CosNaming_c.hh` when you use this class.

Code sample

This code sample shows the IDL Specification for the `NamingContextExt` interface.

```
module CosNaming {  
    interface NamingContextExt {  
        typedef string StringName;  
        typedef string Address;  
        typedef string urlString;  
        StringName to_string(in Name n)  
            raises(InvalidName);  
        Name to_name(in StringName sn)  
            raises(InvalidName);  
        exception InvalidAddress {};  
        urlString to_url(in Address addr, in StringName sn)  
            raises(InvalidAddress, InvalidName);  
        Object resolve_str(in StringName n)  
            raises(NotFound, CannotProceed, InvalidName);  
    };  
};
```

NamingContextExt methods

```
virtual char* to_string(const Name& _n);
```

This operation returns the stringified representation of the specified Name.

Parameter	Description
<code>_n</code>	A <code>Name</code> structure initialized with the desired name for object.

The following exception can be raised by this method.

Exception	Description
InvalidName	The specified <code>Name</code> has no name components or the <code>id</code> field of one of its name components is an empty string.

```
virtual Name* to_name(const char* _sn);
```

This operation returns a `Name` object for the specified stringified name.

Parameter	Description
<u>_sn</u>	The stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
InvalidName	The specified <code>Name</code> has no name components or the <code>id</code> field of one of its name components is an empty string.

```
virtual char* to_url(const char* _addr, const char* _sn);
```

This operation returns a fully-formed string URL using the URL specified in `_addr` and the stringified name in `_sn`.

Parameter	Description
<u>_addr</u>	A URL component of the form <code>myhost.inprise.com:800</code> . If the Address is empty, it is the local host.
<u>_sn</u>	A stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
InvalidAddress	The specified Address is malformed.
InvalidName	The specified <code>Name</code> has no name components or the <code>id</code> field of one of its name components is an empty string.

```
virtual CORBA::Object_ptr resolve_str(const char* _n);
```

This operation returns a `Name` object for the specified stringified name.

Parameter	Description
<u>_n</u>	A stringified name of an object.

The following exceptions can be raised by this method.

Exception	Description
NotFound	The <code>Name</code> , or one of its components, could not be found.

Exception	Description
CannotProceed	One of the NameComponent objects in the sequence could not be resolved. The client may still be able to continue the operation from the returned NamingContext.
InvalidName	The specified Name has no name components or the id field of one of its name components is an empty string.

Binding and BindingList

The Binding, BindingList, and BindingIterator interfaces are used to describe the name-object bindings contained in a NamingContext. The Binding struct encapsulates one such pair. The binding_name field represents the Name and the binding_type indicates whether the Name is bound to a VisiBroker ORB object or a NamingContext object.

The BindingList is a sequence of Binding structures contained by a NamingContext object. An example program that uses the BindingList can be found in <install dir>/examples/vbroker/ins/pluggable_adaptor.

Include file

Include the file CosNaming_c.hh when you use these data types and structure.

Code sample

This code sample shows the IDL specification for the Binding structure.

```
module CosNaming {
    enum BindingType {
        nobject,
        ncontext
    };
    struct Binding {
        Name binding_name;
        BindingType binding_type;
    };
    typedef sequence <Binding> BindingList;
};
```

BindingIterator

```
class _VISNMEXPORT BindingIterator : public virtual
CORBA_Object
```

This object allows a client application to walk through the unbounded collection of bindings returned by the NamingContext operation list. An example program that uses the BindingIterator can be found in <install dir>/examples/vbroker/ins/pluggable_adaptor.

Include file

Include the file CosNaming_c.hh when you use this class.

Code sample

This code sample shows the IDL specification for the BindingIterator interface.

```
module CosNaming {
    interface BindingIterator {
        boolean next_one(out Binding b1);
        boolean next_n(in unsigned long how_many, out
BindingList b);
        void destroy();
    };
};
```

BindingIterator methods

```
virtual CORBA::Boolean next_one(Binding_out _b);
```

This method returns the next Binding from the collection. It returns CORBA::FALSE if the list has been exhausted. Otherwise, it returns CORBA::TRUE.

Parameter	Description
_b	The next Binding object from the list.

```
virtual CORBA::Boolean next_n(CORBA::ULong _how_many,
BindingList_out _bl);
```

This method returns a BindingList containing the number of requested Binding objects from the list. The number of bindings returned may be less than the requested amount if the list is exhausted. FALSE is returned when the list has been exhausted. Otherwise, TRUE is returned.

Parameter	Description
_how_many	The maximum number of Binding object desired.
_bl	A BindingList containing no more than the requested number of Binding objects.

```
virtual void destroy();
```

This method destroys this object and releases the memory associated with the object. Failure to call this method will result in increased memory usage.

NamingContextFactory

```
class _VISNMEXPORT NamingContextFactory : public virtual
CORBA_Object
```

This interface is provided to instantiate an initial NamingContext. A client may bind to an object of this type and use the `create_context` method to create an initial context. Once the initial context has been created, the `new_context` method can be used to create other contexts. An instance of this naming context factory is created when the naming service is started, described in the Naming Service section of the *VisiBroker C++ Developer's Guide*.

To create an initial NamingContextFactory that automatically creates a single root context, go to “[ExtendedNamingContextFactory](#)” on page 135.

Include file

Include the file CosNamingExt_c.hh when you use this class.

Code sample

This code sample shows the IDL specification for the NamingContextFactory.

```
module CosNamingExt {
    interface NamingContextFactory {
        CosNaming::NamingContextExt create_context();
        ClusterManager get_cluster_manager();
        void remove_stale_contexts(in string password);
        NamingContextList list_all_roots(in string password);
        oneway void shutdown();
    };
};
```

Methods

```
virtual CosNaming::NamingContextExt_ptr
    create_context();
```

This method allows a client to create a naming context. Since the specification for naming contexts states that they do not have any notion of a root context, simply instantiating a NamingContextFactory does not create a naming context.

```
virtual ClusterManager_ptr get_cluster_manager();
```

This method returns the cluster manager.

```
virtual NamingContextList* list_all_roots (const char*
    _password);
```

This method lists a minimum set of root contexts which allows you to access every context in the namespace.

```
virtual void remove_stale_contexts (const char*
    _password);
```

This method allows the client to remove bindings which relate to a destroyed context.

```
virtual void shutdown();
```

This method allows a client to shut the naming service down gracefully. If the service is restarted with the same backing store, the factory is restored to the state it had prior to being shut down.

ExtendedNamingContextFactory

```
class _VISNMEXPORT ExtendedNamingContextFactory :  
    public virtual CosNamingExt::NamingContextFactory,  
    public virtual CORBA_Object
```

This interface extends the NamingContextFactory interface and allows the creation of a default root within a factory when the extended naming service is started, described in the Naming Service section of the *VisiBroker C++ Developer's Guide*.

Include file

Include the file CosNamingExt_c.hh when you use this class.

Code sample

This code sample shows the IDL specification for the ExtendedNamingContextFactory.

```
module CosNamingExt {  
    interface ExtendedNamingContextFactory :  
        NamingContextFactory{  
            CosNaming::NamingContextExt root_context();  
        };  
};
```

Methods

```
virtual CosNaming::NamingContextExt_ptr root_context();
```

This method returns the root naming context that was created automatically when this object was instantiated.

Event service interfaces and classes

This section describes the interfaces and classes for the VisiBroker for C++ Event Service.

ConsumerAdmin

```
public interface ConsumerAdmin extends ConsumerAdminPOA
```

This interface is used by consumer applications to obtain a reference to a proxy supplier object. This is the second step in connecting a consumer application to an EventChannel.

IDL definition

```
module CosEventChannelAdmin {  
    interface ConsumerAdmin {  
        ProxyPushSupplier obtain_push_supplier();  
        ProxyPullSupplier obtain_pull_supplier();  
    };  
};
```

ConsumerAdmin methods

```
public ProxyPushSupplier obtain_push_supplier();
```

The obtain_push_supplier method should be invoked if the calling consumer application is implemented using the push model. If the application is implemented using the pull model, the obtain_pull_supplier method should be invoked.

```
public ProxyPullSupplier obtain_pull_supplier();
```

The returned reference is used to invoke either the connect_push_consumer, described in , or the connect_pull_consumer method, described in “[ProxyPullConsumer](#)” on page 139.

EventChannel

```
public interface EventChannel
```

The EventChannel provides the administrative operations for adding suppliers and consumers to the channel and for destroying the channel. For information on creating an event channel, see “[EventChannelFactory](#)” on page 138.

Suppliers and consumers both use the _bind method to obtain an EventChannel reference. As with any _bind invocation, the caller can optionally specify the object name of the desired EventChannel as well as any desired bind options. These arguments can be passed to the supplier or consumer as initial parameters or they may be obtained from the Naming Service, if it is available. If the object name is not specified, VisiBroker Edition locates a suitable EventChannel. Once a supplier or consumer is

connected to an EventChannel, it may invoke any of the EventChannel methods.

IDL definition

```
module CosEventChannelAdmin {  
    interface EventChannel {  
        ConsumerAdmin for_consumers();  
        SupplierAdmin for_suppliers();  
        void destroy();  
    };  
};
```

Methods

The following code sample shows the supplier binding to an EventChannel with the object name "power".

```
int main(int argc, char* const* argv)  
{  
    ...  
    CosEventChannelAdmin::EventChannel_var my_channel  
    =  
  
    CosEventChannelAdmin::EventChannel::_bind("power");  
    CosEventChannelAdmin::SupplierAdmin_var =  
    channel->for_suppliers();  
    ...  
}
```

ConsumerAdmin **for_consumers()**;

This method returns a ConsumerAdmin object that can be used to add consumers to this EventChannel.

SupplierAdmin **for_suppliers()**;

This method returns a SupplierAdmin object that can be used to add suppliers to this EventChannel.

void destroy();

This method destroys this EventChannel.

EventChannelFactory

```
public interface EventChannelFactory
```

The EventChannelFactory provides methods for creating, locating, and destroying event channels.

IDL definition

```
module CosEventChannelAdmin {  
    interface EventChannelFactory {  
        exception AlreadyExists();  
        exception ChannelsExist();  
        EventChannel create();  
    };  
};
```

```

        EventChannel create_by_name(in string name)
                    raises(AlreadyExists);
        EventChannel lookup_by_name(in string name);
        void destroy()
                    raises(ChannelsExist);
    };
};

```

EventChannelFactory methods

`EventChannel create();`

This method creates an anonymous, transient event channel.

`EventChannel create_by_name(in string name)
 raises(AlreadyExists);`

This method creates a named, persistent event channel. If an event channel with the specified name has already been created, an `AlreadyExists` exception is raised.

`EventChannel lookup_by_name(in string name);`

This method attempts to return the `EventChannel` with the specified name. If no channel with the specified name exists, a `NULL` value is returned.

`void destroy();`

This method destroys this event channel. The disconnect methods of all suppliers and consumers connected to the channel are called before the channel is destroyed. Once destroyed, if the channel was created by the `create_by_name` method, it is no longer found by the `lookup_by_name` method.

ProxyPullConsumer

`public interface ProxyPullConsumer`

This interface is used by a pull supplier application and provides the `connect_pull_supplier` method for connecting the supplier's `PullSupplier`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same proxy more than once. It can also raise the `TypeError` exception if the proxy objects of an event channel implementation impose additional type constraints that are connected to them.

IDL definition

```

module CosEventChannelAdmin {
    exception AlreadyConnected();
    interface ProxyPullConsumer :
        CosEventComm::PullConsumer {
            void connect_pull_supplier(
                in CosEventComm::PullSupplier pull_supplier)
                    raises(AlreadyConnected, TypeError);
    };
};

```

ProxyPushConsumer

```
public interface ProxyPushConsumer
```

This interface is used by a push supplier application and provides the `connect_push_supplier` method which is used to connect the supplier's `PushSupplier`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same proxy more than once.

IDL definition

```
module CosEventChannelAdmin {  
    exception AlreadyConnected();  
    interface ProxyPushConsumer :  
        CosEventComm::PushConsumer {  
            void connect_push_supplier(  
                in CosEventComm::PushSupplier push_supplier)  
                raises(AlreadyConnected);  
        };  
};
```

ProxyPullSupplier

```
public interface ProxyPullSupplier
```

This interface is used by a pull consumer application and provides the `connect_pull_consumer` method which is used for connecting the consumer's `PullConsumer`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same `PullConsumer` more than once.

IDL definition

```
module CosEventChannelAdmin {  
    exception AlreadyConnected();  
    interface ProxyPullSupplier :  
        CosEventComm::PullSupplier {  
            void connect_pull_consumer(  
                in CosEventComm::PullConsumer pull_consumer)  
                raises(AlreadyConnected);  
        };  
};
```

ProxyPushSupplier

```
public interface ProxyPushSupplier
```

This interface is used by a push consumer application and provides the `connect_push_consumer` method which is used to connect the consumer's `PushConsumer`-derived object to the `EventChannel`. An `AlreadyConnected` exception is raised if an attempt is made to connect the same `PushConsumer` more than once. It can also raise the `TypeError` exception if the proxy objects of an event channel implementation impose additional type constraints that are connected to them.

IDL definition

```
module CosEventChannelAdmin {
    exception AlreadyConnected();
    interface ProxyPushSupplier :
        CosEventComm::PushSupplier {
            void connect_push_consumer(
                in CosEventComm::PushConsumer push_consumer)
                raises(AlreadyConnected, TypeError);
        };
};
```

PullConsumer

```
public interface PullConsumer
```

This interface is used to derive consumer objects that use the pull model of communication. The `pull` method is called by a consumer whenever it wants data from the supplier. A `Disconnected` exception is raised if the supplier has disconnected.

The `disconnect_pull_consumer` method is used to deactivate this consumer if the channel is destroyed.

IDL definition

```
module CosEventComm {
    exception Disconnected {};
    interface PullConsumer {
        void push(in any data) raises(Disconnected);
        void disconnect_pull_consumer();
    };
};
```

PushConsumer

```
public interface PushConsumer
```

This interface is used to derive consumer objects that use the push model of communication. The `push` method is used by a supplier whenever it has data for the consumer. A `Disconnected` exception is raised if the consumer has disconnected.

IDL definition

```
module CosEventComm {
    exception Disconnected();
    interface PushConsumer {
        void push(in any data) raises(Disconnected);
        void disconnect_push_consumer();
    };
};
```

PullSupplier

```
public interface PullSupplier
```

This interface is used to derive supplier objects that use the pull model of communication.

IDL definition

```
module CosEventComm {  
    interface PullSupplier {  
        any pull() raises(Disconnected);  
        any try_pull(out boolean has_event)  
            raises(Disconnected);  
        void disconnect_pull_supplier();  
    };  
};
```

PullSupplier methods

```
any pull();
```

This method blocks until there is data available from the supplier. The data is returned an Any type. If the consumer has disconnected, this method raises a Disconnected exception.

```
any try_pull(out boolean has_event);
```

This non-blocking method attempts to retrieve data from the supplier. When this method returns, has_event is set to the value true and the data is returned as an Any type if there was data available. If the value of has_event is false, then no data is available and the return value is NULL.

```
void disconnect_pull_supplier();
```

This method deactivates this pull server if the channel is destroyed.

PushSupplier

```
public interface PushSupplier
```

This interface is used to derive supplier objects that use the push model of communication. The disconnect_push_supplier method is used by the EventChannel to disconnect supplier when it is destroyed.

IDL definition

```
module CosEventComm {  
    exception AlreadyConnected();  
    interface PushSupplier {  
        void disconnect_push_supplier();  
    };  
};
```

SupplierAdmin

```
public interface SupplierAdmin
```

This interface is used by supplier applications to obtain a reference to the proxy consumer object. This is the second step in connecting a supplier application to an EventChannel.

IDL definition

```
module CosEventChannelAdmin {  
    interface SupplierAdmin {  
        ProxyPushConsumer obtain_push_consumer();  
        ProxyPullConsumer obtain_pull_consumer();  
    };  
};  
  
public ProxyPushConsumer obtain_push_consumer();  
  
The obtain_push_consumer method should be invoked if the supplier application is implemented using the push model. If the application is implemented using the pull model, the obtain_pull_consumer method should be invoked.  
  
public ProxyPullConsumer obtain_pull_consumer();  
  
The returned reference is used to invoke either the connect\_push\_supplier or the connect\_pull\_supplier method.
```


Server Manager Interfaces and Classes

This section describes the VisiBroker for C++ Server Manager interfaces and classes. For additional information about the Server Manager, see "Using the VisiBroker Server Manager" in the *VisiBroker for C++ Developer's Guide*.

The Container Interface

```
class _VISSVMGREXPORT Container : public virtual  
CORBA_Object
```

A container can hold properties, operations, and other containers. Each major ORB component is represented as a container. The top-level container does not support any properties or operations but contains child containers, such as the ORB container. The ORB container in turn contains ORB properties, a shutdown method, and other containers like RootPOA, Agent, DebugLogger, ServerEngines and so forth.

Include file

Include the file `servermgr_c.hh` when using this class.

The Container Interface

This section explains the C++ methods that can be executed on the container interface. There are four categories:

- Methods related to property manipulation and queries
- Methods related to operations
- Methods related to children containers
- Methods related to storage

Methods related to property manipulation and queries

```
virtual CORBA::StringSequence* list_all_properties();
```

Returns the names of all the properties in the container as a `StringSequence`.

```
virtual PropertySequence* get_all_properties();
```

Returns the `PropertySequence` containing the names, values, and read-write status of all the properties in the container.

```
virtual Property* get_property(const char * name);
```

Returns the value of the property `name` passed as an input parameter.

Parameter	Description
name	The name of the property.

It throws `NameInvalid` exception if the parameter passed is not a valid property name.

```
virtual void set_property(const char* name, CORBA::Any& value);
```

Sets the value of the property *name* to the requested *value*.

Parameters	Descriptions
name	The name of the property whose value is to be set.
value	The property value as <i>Any</i> type.

It can throw these exceptions:

- `NameInvalid` if the property name is invalid, for example if the property does not exist in the container.
- `ValueInvalid` if the property value is not valid.
- `ValueNotSettable` if the property value cannot be set, for example if the property is read-only.

```
virtual void persist_properties(CORBA::Boolean recurse);
```

Causes the container to actually store its properties to the associated “[Storage Interface Methods for C++](#)” on page 149. If no storage is associated with the container, a `StorageException` will be raised. When it is invoked with the parameter `recurse=true`, the properties of the children containers are also stored into the storage. It is up to the container to decide if it has to store all the properties or only the changed properties.

Parameter	Description
recurse	Indicates whether the sub-containers' <code>persist_properties</code> should be called recursively.

It throws `StorageException` exception if an error occurs while persisting the properties.

```
virtual void restore_properties(CORBA::Boolean recurse);
```

Instructs the container to obtain its properties from the storage. A container knows exactly what properties it manages and it attempts to read those properties from the storage. The containers shipped with the ORB do not support restoring from the storage. You must create containers that support this feature yourself.

Parameter	Description
recurse	Indicates whether the sub-containers' <code>restore_properties</code> should be called recursively.

It throws `StorageException` exception if an error occurs while restoring the properties.

Methods related to operations

```
virtual CORBA::StringSeqence* list_all_operations();
```

Returns the names of all the operations supported in the container.

```
virtual OperationSequence* get_all_operations();
```

Returns all the operations along with the parameters and the type code of the parameters so that the operation can be invoked with the appropriate parameters.

```
virtual Operation* get_operation(const char* name);
```

Returns the parameter information of the operation specified by *name* which can be used to invoke the operation.

Parameter	Description
name	The name of the operation to get the parameter information.

It can throw *NameInvalid* exception if the parameter specifies an operation which is not supported.

```
CORBA::Any* do_operation(const Operation& op);
```

Invokes the method in the operation and returns the result.

Parameter	Description
op	The operation which is to be performed on the server.

It can throw these exceptions:

- *NameInvalid* if the operation is not defined on the container.
- *OperationFailed* if the operation failed to execute.
- *ValueInvalid* if the value for any of the parameter is not of the expected type.

Methods related to children containers

```
virtual CORBA::StringSequence* list_all_containers();
```

Returns the names of all the children containers of the current container.

```
virtual NamedContainerSequence* get_all_containers();
```

Returns all the named children containers.

```
virtual NamedContainer* get_container(const char * name) ;
```

Returns the named child container identified by the *name* parameter.

Parameter	Description
name	The name of the container on which the children containers are to be queried.

If there is no child container with this name, a `NameInvalid` exception is raised.

```
virtual void add_container(const NamedContainer&
    container);
```

Adds the container as a child container of this *container*.

Parameter**Description**

container

The named container to be added into this container.

It throws `NameAlreadyPresent` exception if a container with the specified name already exists. It throws `ValueInvalid` exception if the named container value is invalid.

```
virtual void set_container (const char * name,
    Container_ptr value);
```

Modifies the child container identified by the *name* parameter to one in the *value* parameter.

Parameter**Description**

name

The name of the container whose value is to be replaced.

value

The new child container.

It can throw these exceptions:

- `NameInvalid` if no container with the specified name exists.
- `ValueNotSettable` if the i the container could not be replaced, for example if the original container is created to be irreplaceable.
- `ValueInvalid` if the named container value is invalid.

Methods related to storage

```
virtual void set_storage(Storage_ptr s, CORBA::Boolean
    recurse);
```

Sets the storage of this container. If `recurse=true`, it also sets the storage for all its children as well.

Parameter**Description**

s

The new storage to be set.

recurse

Indicates whether to set the storage recursively for the children containers.

```
virtual Storage_ptr get_storage();
```

Returns the current storage of the container.

The Storage Interface

```
class _VISSVMGREXPORT Storage : public virtual  
    CORBA_Object
```

The Server Manager provides an abstract notion of *storage* that can be implemented in any fashion. Individual containers may choose to store their properties in databases, flat files, or some other means. The storage implementation included with the VisiBroker ORB uses a flat-file-based approach.

Include file

Include the file `servermgr_c.hh` when using this class.

Storage Interface Methods for C++

```
virtual void open();
```

Opens the storage and makes it ready for reading and writing the properties. For the database-based implementation, logging into the database is performed in this method.

It can throw `StorageException` if the storage could not be opened for any reasons.

```
virtual void close();
```

Closes the storage. This method also updates the storage with any properties that have been changed since the last `Container::persist_properties` call. In database implementations, this method closes the database connection.

It can throw `StorageException` if the closing fails for any reasons.

```
virtual Container::PropertySequence* read_properties();
```

Reads all the properties from the storage. It can throw `StorageException` if the properties could not be read from the Storage.

```
virtual Container::Property* read_property(const char *  
    propertyName);
```

Returns the property value for `propertyName` read from the storage.

Parameter	Description
<code>propertyName</code>	The name of the property which is to be read from the Storage.

It throws `NameInvalid` exception if the property name is not known to the container. It throws `StorageException` if an error occurs while reading the property from the storage.

```
virtual void write_properties( const  
    Container::PropertySequence& p );
```

Saves the property sequence into the storage.

Parameter	Description
p	The sequence of properties which have been changed in the session. It can throw StorageException if an error occurs while writing the properties to storage.

```
virtual void write_property( const Container::Property&  
    p );
```

Saves the single property into the storage.

Parameter	Description
p	The property which is to be written to the persistent storage. It can throw StorageException if an error occurs while writing the property to storage.

Transaction Service interfaces and classes

This section describes the VisiBroker VisiTransact Transaction Service interfaces and classes.

CosTransactions and VIStTransactions modules

This section introduces the CosTransactions and VisTransactions modules, and describes the data types, structures, and exceptions for the CosTransactions module.

Looking at the CosTransactions module

The CosTransactions module is the Transaction Service IDL that conforms to the final OMG Transaction Service document. This is the module to use to restrict yourself strictly to CORBA-compliant methods. The IDL for this module is contained in the file **CosTransactions.idl**.

You might also consider using the VIStTransactions module, which contains the IDL for some VisiBroker VisiTransact extensions to the standard. The IDL for the VIStTransactions module is contained in the file **VIStTransactions.idl**. You can use **VIStTransactions.idl** in your code to obtain both the CosTransactions and VIStTransactions modules. For more information, see “[Looking at the VIStTransactions module](#)” on page 154.

Data types

The CosTransactions module defines the data types enum Status and enum Vote.

The definition for the enum Status data type is:

```
enum Status
{
    StatusActive,
    StatusMarkedRollback,
    StatusPrepared,
    StatusCommitted,
    StatusRolledBack,
    StatusUnknown,
    StatusNoTransaction
    StatusPreparing,
    StatusCommitting,
    StatusRollingBack,
};
```

For a description of each Status value, see “[Status value definitions](#)” on page 160.

The enum Vote data type is used only by implementations of the CosTransactions::Resource interface. It is used to indicate the result of a Resource's attempt to prepare a transaction.

The definition for the enum Vote data type is:

```
enum Vote
{
    VoteCommit,
    VoteRollback,
    VoteReadOnly
};
```

The Vote values are:

- **VoteCommit.** The Resource is able to write (or has already written) all the data needed to commit the transaction to stable storage, as well as an indication that it has prepared the transaction.
- **VoteRollback.** For any reason, the Resource could not vote to commit the transaction. This includes not having any knowledge about the transaction (which might happen after a crash).
- **VoteReadOnly.** No persistent data associated with the Resource has been modified by the transaction.

Structures

The CosTransactions module defines these structures, which are used to save the transaction context.

- **otid_t** contains an object transaction ID (or otid), which is a globally unique ID for a transaction. The **otid_t** structure is a more efficient OMG IDL version of the X/Open-defined transaction identifier (XID). The **otid_t** can be transformed to an X/Open XID and vice versa.
- **TransIdentity** contains certain key information for a transaction: its Coordinator, its Terminator (optionally), and its **otid**.
- **PropagationContext** contains a transaction's **TransIdentity** and its time-out. In addition, it contains a **TransIdentity** for the parent and each ancestor transaction, up to the top-level transaction, formatted as a sequence (or array). Because nested transactions are not implemented in VisiTransact, every transaction is a top-level transaction, and the parents sequence will always be empty.

For the most part, these structures are used behind the scenes; you won't reference them directly.

```
struct otid_t
{
    long formatID;
    long bqual_length;
    sequence <octet> tid;
};

struct TransIdentity
{
    Coordinator coordinator;
    Terminator terminator;
    otid_t otid;
};

struct PropagationContext
{
    unsigned long timeout;
    TransIdentity current;
    sequence <TransIdentity> parents;
    any implementation_specific_data;
};
```

When the transaction context is passed from one object to another object, usually a `TransactionalObject`, it is commonly passed as a `PropagationContext`. The `implementation_specific_data` field is reserved for the VisiTransact Transaction Service.

For the most part, these structures are used behind the scenes; you won't reference them directly. Certain methods, however, work explicitly with `PropagationContext`.

- `Coordinator::get_txcontext()` extracts a `PropagationContext`.
- `TransactionFactory::recreate()` uses a `PropagationContext` to create a new `Control` object.

The transaction context is always passed to a transactional object implicitly. In addition, a program may be passed a transaction context explicitly, as a parameter. You can use `Coordinator::get_txcontext()` to get the `PropagationContext`. For more information on propagation of transaction context, see "[TransactionalObject interface](#)" on page 167.

Another method that obtains information from these structures is the `VISTransactions::Current::get_otid()` method, which extracts the `otid` from the `PropagationContext`.

Exceptions

Exceptions are divided into three categories: Standard, Heuristic, and Method-specific.

Exception	When this exception is thrown ...
<code>CORBA::INVALID_TRANSACTION</code>	The invoking thread has an invalid transaction context.
<code>CORBA::NO_PERMISSION</code>	The invoking thread does not have permission to complete the transaction. For example, only the transaction-originator thread can call this method.
<code>CORBA::TRANSACTION_REQUIRED</code>	The invoking thread does not have a transaction context.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been rolled back.
<code>CORBA::WrongTransaction</code>	Raised by the ORB when returning the response to a deferred synchronous request. This exception is raised only if the request was implicitly associated with a different transaction than the thread requesting the response through <code>Request::get_response()</code> or <code>ORB::get_next_response()</code> . See the VisiBroker section on Dynamic Invocation Interface (DII).

Exception	When this exception is thrown ...
<code>CosTransactions::HeuristicCommit</code>	The rollback operation on a Resource raises this exception to report that a heuristic decision was made, and that all relevant updates have been committed.
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made when attempting to commit the transaction. Some relevant updates have been committed and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made when attempting to commit the transaction. The disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. (In other words, the <code>HeuristicMixed</code> exception takes priority over the <code>HeuristicHazard</code> exception.)
<code>CosTransactions::HeuristicRollback</code>	The commit operation on a Resource raises this exception to report that a heuristic decision was made and that all relevant updates have been rolled back.

Exception	When this exception is thrown
CosTransactions::Inactive	The transaction has already been prepared.
CosTransactions::InvalidControl	The Control parameter passed to resume is not valid in the current execution environment.
CosTransactions::NotPrepared	A commit has been issued but the Resource has not been prepared.
CosTransactions::NoTransaction	No transaction is associated with the client thread.
CosTransactions::NotSubtransaction	Not raised in VisiTransact.
CosTransactions::Subtransactions Unavailable	Because VisiBroker VisiTransact does not support nested transactions, this exception is raised if an attempt is made to begin a transaction when a transaction is already in progress for this client thread.
CosTransactions::Synchronization Unavailable	Not raised in VisiTransact.
CosTransactions::Unavailable	The requested object cannot be provided. For example, the Control object could not provide a Terminator.

Looking at the VISTransactions module

Interfaces in the VIStTransactions module inherit from and extend the CosTransactions interfaces. The VIStTransactions module defines no new data types, structures, or exceptions over those in CosTransactions. For example, the Current interface includes VisiBroker VisiTransact methods that make certain programming operations shorter and more convenient. The IDL for this module is contained in the file **VIStTransactions.idl**.

For related information see “[Choosing a Current interface](#)” on page 154 and “[Obtaining a Current object reference](#)” on page 156.

Current interface

The Current interface defines methods to:

- Enable a program to manage transactions.
- Use implicit transaction propagation.
- Obtain information about the current transaction.
- Register Resources and Synchronization objects.

VisiBroker VisiTransact supports a number of extensions to the OMG Transaction Service specification--additional methods for added convenience. VisiBroker VisiTransact methods on the Current interface can simplify the use of the VisiTransact Transaction Service for most programs.

Choosing a Current interface

The VisiTransact Transaction Service provides the Current interface in the following IDL files:

- **CosTransactions.idl** contains the Transaction Service IDL that conforms to the final OMG Transaction Service document.
- **VIStTransactions.idl** provides both the CosTransactions interface and the VIStTransactions interface, which inherits and extends the CosTransactions::Current interface. This interface includes VisiBroker VisiTransact extensions such as `begin_with_name()`, `register_resource()`, and others.

You should use one of these IDL files. To restrict yourself strictly to CORBA-compliant methods, use the **CosTransactions.idl**. If you decide to use any of the VisiTransact extensions, use **VISTransactions.idl**.

The following example shows the CosTransactions interface for Current.

```

...
interface Current
{
    void begin()
        raises(SubtransactionsUnavailable);
    void commit(in boolean report_heuristics)
        raises (NoTransaction,
                HeuristicMixed,
                HeuristicHazard);
    void rollback()
        raises(NoTransaction);
    void rollback_only()
        raises(NoTransaction);
    Status get_status();
    string get_transaction_name();
    void set_timeout(in unsigned long seconds);
    Control get_control();
    Control suspend();
    void resume(in Control which)
        raises(InvalidControl);
};

...

```

The next example shows the VISTransactions interface for Current.

```

interface Current : CosTransactions::Current
{
    void begin_with_name(in string user_transaction_name)
        raises(CosTransactions::SubtransactionsUnavailable);
        CosTransactions::RecoveryCoordinator
            register_resource(in CosTransactions::Resource
resource)
                raises(CosTransactions::Inactive);
    void register_synchronization(in
CosTransactions::Synchronization synch)
        raises(CosTransactions::NoTransaction,
                CosTransactions::Inactive,
                CosTransactions::SynchronizationUnavailable
                    CosTransactions::Unavailable);
    CosTransactions::otid_t get_otid();
        raises(CosTransactions::NoTransaction,
                CosTransactions::Unavailable);
    CosTransactions::PropagationContext get_txcontext()
        raises(CosTransactions::Unavailable,
                CosTransactions::NoTransaction);
    attribute string ots_name;
    attribute string ots_host;
    attribute string ots_factory;
};

```

Obtaining a Current object reference

To gain access to a VisiTransact-managed transaction, you must obtain an object reference to the Current object. The Current object reference is valid throughout the process.

The example below shows how a reference to the Current object is obtained using the `resolve_initial_references()` method, and then how the object returned by that method is narrowed to a `CosTransactions::Current` object.

```
int main(....)
{
    try
    {
        .....
        // ORB related initialization
        // get reference to a CosTransactions::Current instance
CORBA::Object_var
        obj = orb-
>resolve_initial_references("TransactionCurrent");
        CosTransactions::Current_var
        current = CosTransactions::Current::__narrow(obj);
        ...
    }
    catch(...) { } // catch all exceptions or exceptions
you care about,
}
```

VisiBroker VisiTransact offers extensions to the Current interface to simplify certain operations. To take advantage of these extensions, narrow to a `VISTransactions::Current` object.

```
VISTransactions::Current::__narrow(obj)
```

Using the Current object reference

The Current object reference is valid for the entire process under which you create it; you can use it in any thread. You can either make multiple calls to obtain references to the Current object or use just one reference throughout the entire process. Typically, you would obtain one reference to avoid multiple invocations of `resolve_initial_references()`.

The C++ header files that you include must also correspond to your choice of interfaces.

- For `VISTransactions`, use `#include <VISTransactions_c.hh>`.
- For `CosTransactions`, use `#include <CosTransactions_c.hh>`.

For more information, see the VisiBroker *VisiTransact Guide*.

Is your VisiTransact Transaction Service instance available?

You can issue `begin()` or `begin_with_name()` to determine if the instance of your VisiTransact Transaction Service is available. The method will raise `CORBA:NO_IMPLEMENT` exception if the instance is not available.

Calling `get_status()` when there is no available instance of the VisiTransact Transaction Service will return the current transaction state,

and cannot be used to determine if the instance of the VisiTransact Transaction Service is available.

Checked behavior

Checked behavior is supported by the VisiTransact Transaction Service to provide an extra level of transaction integrity. Specifically, checked behavior is supported for transactions originated with `Current::begin()`. The purpose of the checks is to ensure that all transactional requests made by the application have completed their processing before the transaction is committed. This guarantees that a commit will not succeed unless all transactional objects involved in the transaction have completed the processing of their transactional requests. For checks that are part of the commit process, see “[“commit\(\)” on page 158](#)”. For more information about checked behavior, see the VisiBroker *VisiTransact Guide*.

Current methods

`begin()`

```
void begin()
    raises SubtransactionsUnavailable;
```

This method creates a new transaction. Because nested transactions are *not* supported in VisiBroker VisiTransact, this is always a top-level transaction.

The transaction context of the client thread is modified so that the thread is associated with the new transaction. If the client thread is already associated with a transaction, the `SubtransactionsUnavailable` exception is raised.

Included in the Current interface in **CosTransactions.idl**

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::SubtransactionsUnavailable</code>	Because VisiBroker VisiTransact does not support nested transactions, this exception is raised if a transaction is already in progress for this client thread.

For more information, see the **VisiBroker VisiTransact Guide**.

`begin_with_name()`

```
void begin_with_name(in string user_transaction_name)
    raises(CosTransactions::SubtransactionsUnavailable);
```

This VisiBroker VisiTransact method is a `begin()` method that enables its caller to pass a user-defined informational transaction name. For example, this helps with diagnostics because the user-defined transaction name is included in the value returned by the `get_transaction_name()` method. The name also helps with administration, because the Console will report the name in the detailed information about an outstanding transaction.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see “[“Obtaining a Current object reference” on page 156](#)”.

Included in the Current interface in **VISTransactions.idl**

The following parameters are used by this method.

Parameter	Description
user_transaction_name	This user-defined informational transaction name can be used to trace transactions and debug programs.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::SubtransactionsUnavailable	This exception is thrown if the thread already has a transaction context.

commit()

```
void commit(in boolean report_heuristics)
    raises(NoTransaction,
           HeuristicMixed,
           HeuristicHazard
    ) ;
```

This method commits the transaction associated with the client thread. The effect of this method is equivalent to calling the `commit()` method on the corresponding Terminator object.

If this transaction has been marked for rollback, or any Resource votes for rollback, this call raises CORBA::TRANSACTION_ROLLEDBACK. If there is no current transaction, a `CosTransactions::NoTransaction` exception is raised. If the caller is not the transaction originator, `commit()` raises the exception CORBA::NO_PERMISSION.

Checks are made to ensure checked behavior. See the VisiBroker *VisiTransact Guide* for more information.

On return from this method, the client thread is no longer associated with a transaction. Any attempt to use `Current`, as if there were a transaction, will raise an exception, such as `NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or will return a null object reference.

This method does not return until the transaction is complete, and all related Synchronization objects have been notified.

Included in the Current interface in **CosTransactions.idl**

The following parameters are used by this method.

Parameter	Description
in boolean report_heuristics	true: Requests that the program be notified when heuristic decisions are made. false: Requests that the heuristic information is not returned to the program.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::NoTransaction	No transaction is associated with the client thread.
CosTransactions::HeuristicMixed	A heuristic decision was made and <code>report_heuristics</code> is true. Some relevant updates have been committed and others have been rolled back.

Exception	When thrown
CosTransactions::HeuristicHazard	A heuristic decision may have been made and <code>report_heuristics</code> is true. The disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.
CORBA::NO_PERMISSION	Only the transaction-originator thread can call this method.
CORBA::OBJECT_NOT_EXIST	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.
CORBA::TRANSACTION_ROLLEDBACK	The transaction was rolled back.

For more information on the heuristic log, see the VisiBroker *VisiTransact Guide*.

get_control()

```
Control get_control();
```

This method returns a Control object reference that represents the transaction context currently associated with the client thread.

If the client thread is not associated with a transaction, a null object reference is returned.

Caution

See the VisiBroker *VisiTransact Guide* for details on checked behavior and the implications of using this method.

Included in the Current interface in **CosTransactions.idl**.

For related material, see “[Control interface](#)” on page 171 and “[Terminator interface](#)” on page 172. For more information see the VisiBroker *VisiTransact Guide*.

get_otid()

```
CosTransactions::otid_t get_otid()
    raises(CosTransactions::NoTransaction,
          CosTransactions::Unavailable);
```

Most applications will not normally call this method.

This `VISTransactions::Current` method provides the object transaction ID (otid) through the Current interface as a convenience. This avoids going to the Coordinator and looking through a `PropagationContext`. The otid is used to identify a transaction to a recoverable object. This method raises `CosTransactions::NoTransaction` if no transaction is associated with the client thread.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see “[Obtaining a Current object reference](#)” on page 156.

Included in the Current interface in **VISTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::NoTransaction	No transaction is associated with the client thread.
CosTransactions::Unavailable	This exception is thrown if the VisiTransact Transaction Service chooses to restrict the availability of the PropagationContext.

For related material, see “[Control interface](#)” on page 171 and “[Terminator interface](#)” on page 172.

get_status()

```
Status get_status();
```

This method returns an enumerated value (enum Status) that represents the status of the transaction associated with the client thread.

Calling this method is equivalent to calling the `get_status()` method on the corresponding Coordinator object. If there is no transaction associated with the current thread, then the method returns `CosTransactions::StatusNoTransaction`.

The possible return values are:

- StatusActive
- StatusMarkedRollback
- StatusPrepared
- StatusCommitted
- StatusRolledBack
- StatusUnknown
- StatusNoTransaction
- StatusPreparing
- StatusCommitting
- StatusRollingBack

Included in the Current interface in **CosTransactions.idl**.

No user exceptions are raised.

Status value definitions

Some implications of the enum Status values are:

- StatusActive: A transaction is associated with the target object and it is in the active state. The VisiTransact Transaction Service returns this status after a transaction has been started and prior to a Coordinator issuing any prepare statements, unless the transaction has been marked for rollback or timed out.
- StatusMarkedRollback: A transaction is associated with the target object and has been marked for rollback, perhaps as the result of the `rollback_only()` method.
- StatusPrepared: A transaction is associated with the target object and has been prepared.

- StatusCommitted: A transaction is associated with the target object and has been committed. It is likely that heuristics exist, otherwise the transaction would have been quickly destroyed and StatusNoTransaction returned.
- StatusRolledBack: A transaction is associated with the target object and the outcome has been determined as rollback. It is likely that heuristics exist, otherwise the transaction would have been quickly destroyed and StatusNoTransaction returned.
- StatusUnknown: A transaction is associated with the target object, but the VisiTransact Transaction Service cannot determine its current status. This is a transient condition, and a subsequent invocation will ultimately return a different status.
- StatusNoTransaction: No transaction is currently associated with the target object. This will occur after a transaction has completed.
- StatusPreparing: A transaction is associated with the target object and it is in the process of preparing. The VisiTransact Transaction Service returns this status if the transaction has started preparing, but has not yet completed the process, perhaps because it is waiting for responses to prepare from one or more Resources.
- StatusCommitting: A transaction is associated with the target object and is in the process of committing. The VisiTransact Transaction Service returns this status if the transaction has begun to commit, but has not yet completed the process, perhaps because it is waiting for responses from one or more Resources.
- StatusRollingBack: A transaction is associated with the target object and it is in the process of rolling back. The VisiTransact Transaction Service returns this status if the transaction is being rolled back, but has not yet completed the process, perhaps because it is waiting for responses from one or more Resources.

```
get_transaction_name()

string get_transaction_name();
```

This method returns a printable string that is a descriptive name for the transaction. This method is intended to assist in diagnostics and debugging. If the transaction was created by the `begin_with_name()` method, the returned string is the user-defined name assigned to the transaction, rather than the VisiTransact Transaction Service-generated name.

The effect of this method is equivalent to calling the `get_transaction_name()` method on the corresponding Coordinator object. If there is no transaction associated with the client thread, an empty string is returned.

Included in the Current interface in **CosTransactions.idl**.

No user exceptions are raised.

```
get_txcontext()
```

```
CosTransactions::PropagationContext get_txcontext()
    raises(CosTransactions::Unavailable,
           CosTransactions::NoTransaction);
```

Most applications will not normally call this method.

This `VISTransactions::Current` method returns a `PropagationContext`, which can be used by one VisiTransact Transaction

Service domain to export a transaction to a new VisiTransact Transaction Service domain.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see “[Obtaining a Current object reference](#)” on page 156.

Included in the `Current` interface in **VISTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Unavailable</code>	This exception is thrown if the VisiTransact Transaction Service chooses to restrict the availability of the <code>PropagationContext</code> .
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.

For related material, go to “[Coordinator interface](#)” on page 175 and “[Terminator interface](#)” on page 172.

ots_factory

attribute string **ots_factory**;

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the specified VisiTransact Transaction Service. This attribute applies to all the threads in your program. When the attribute is set, it retains its value until set again.

This attribute specifies the VisiTransact Transaction Service instance by IOR. VisiTransact uses the specified IOR (`CosTransactions::TransactionFactory`) to locate the desired instance of a VisiTransact Transaction Service instance on the network. This argument enables VisiTransact to operate without the use of a Smart Agent (**osagent**).

If you specify the IOR with either the Host Name or VisiTransact Transaction Service Name attributes, the Smart Agent will find the VisiTransact Transaction Service instance by IOR only and ignore the other attributes. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the `Current` interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: “[ots_host](#)” on page 162, “[ots_name](#)” on page 163

For more information, see the VisiBroker *VisiTransact Guide*.

ots_host

attribute string **ots_host**;

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the specified VisiTransact Transaction Service. This attribute applies to all the

threads in your program. When the attribute is set, it retains its value until set again. To return this attribute to the default VisiTransact instance, set it to an empty or null string.

This attribute specifies the VisiTransact Transaction Service instance by host name. The Smart Agent will find any available VisiTransact Transaction Service instance that is located on the specified host.

If you specify a combination of Host Name and VisiTransact Transaction Service Name attributes, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the Current interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: “[ots_factory](#)” on page 162 , “[ots_name](#)” on page 163

For more information, see the VisiBroker *VisiTransact Guide*.

ots_name

```
attribute string ots_name;
```

If you are using **VISTransactions.idl**, you can control the instance of the VisiTransact Transaction Service used to create a transaction by setting this attribute before you call `VISTransactions::Current::begin()`. Subsequent calls to the `begin()` method create transactions on the specified VisiTransact Transaction Service. This attribute applies to all the threads in your program. When the attribute is set, it retains its value until set again. To return this attribute to the default VisiTransact instance, set it to an empty or null string.

This attribute specifies the VisiTransact Transaction Service instance by name. The Smart Agent will find the named VisiTransact Transaction Service instance anywhere on the network.

If you specify a combination of Host Name and VisiTransact Transaction Service Name attributes, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you leave all three attributes null, the ORB chooses a VisiTransact Transaction Service instance using the VisiBroker Smart Agent.

Included in the Current interface in **VISTransactions.idl**.

To set this attribute, use the appropriate method generated automatically for the language you are using.

Related attributes: “[ots_factory](#)” on page 162 , “[ots_name](#)” on page 163

For more information, see the VisiBroker *VisiTransact Guide*.

register_resource()

```
CosTransactions::RecoveryCoordinator  
    register_resource(in CosTransactions::Resource  
        resource)  
    raises(CosTransactions::Inactive);
```

Most applications will not normally call this method.

This `VISTransactions::Current` method registers a Resource for a recoverable object. This method is a shortcut for using the Control and

Coordinator objects to register a Resource for a recoverable object. It returns a Recovery Coordinator object that can be used to help coordinate recovery. If this method is invoked when there is no transaction associated with the client thread, the CORBA::TRANSACTION_REQUIRED exception is thrown.

To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see “[Obtaining a Current object reference](#)” on page 156.

Included in the `Current` interface in `VISTransactions.idl`.

The following parameters are used by this method.

Parameter	Description
<code>in CosTransactions::Resource resource</code>	The Resource object for the recoverable object.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::Inactive</code>	The transaction has already been prepared.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been marked for rollback.

For related material, see “[Coordinator interface](#)” on page 175.

`register_synchronization()`

```
void register_synchronization(in
    CosTransactions::Synchronization synch)
    raises(CosTransactions::NoTransaction,
           CosTransactions::Inactive,
           CosTransactions::SynchronizationUnavailable
           CosTransactions::Unavailable);
```

This `VISTransactions::Current` method registers a Synchronization object. This method is a short-cut for using the Control and Coordinator object to register a Synchronization object. To use this method, narrow the object returned from `resolve_initial_references()` to `VISTransactions::Current`. For more information, see “[Obtaining a Current object reference](#)” on page 156.

Included in the `Current` interface in `VISTransactions.idl`.

The following parameters are used by this method.

Parameter	Description
<code>in CosTransactions::Synchronization synch</code>	The Synchronization object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the client thread.
<code>CosTransactions::Inactive</code>	The transaction has already been prepared.

Exception	When thrown
CosTransactions::SynchronizationUnavailable	This exception is not raised by VisiBroker VisiTransact.
CosTransactions::Unavailable	Raised if the VisiTransact Transaction Service restricts the availability of the PropagationContext.

For more information, see the VisiBroker *VisiTransact Guide*.

resume()

```
void resume(in Control which)
    raises(InvalidControl);
```

Associates the client thread with the specified transaction. Typically, this is used to either

- Associate a transaction context with a thread for use in implicit transaction propagation, or
- Resume a transaction that was previously suspended by a `suspend()` method.

The client thread becomes associated with the specified transaction. If the client thread was already associated with a transaction, the previous transaction context is forgotten. If `resume()` is invoked with a NULL control, no transaction is associated with the current thread, and the transaction context is forgotten.

Caution

Any transaction context you set via `resume()` is propagated back to the invoking object.

Included in the Current interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
in Control which	A Control object used to set the thread's transaction context.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::InvalidControl	The Control parameter passed to <code>resume()</code> is not valid in the current execution environment.

For more information, see the VisiBroker *VisiTransact Guide*.

rollback()

```
void rollback()
    raises(NoTransaction);
```

Rolls back the transaction associated with the client thread. This is equivalent to calling the `rollback()` method on the corresponding Terminator object. This method does not return until the transaction is complete, and all related Synchronization objects have been notified. On return from this method, the client thread is no longer associated with a transaction. Any attempt to use `Current`, as if there were a transaction, will

raise an exception, such as `CosTransactions::NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or return a null object reference. If a heuristic occurs, this method will not throw a heuristic-related exception.

If the caller is not the transaction originator, `rollback()` raises the exception `CORBA::NO_PERMISSION`.

Included in the Current interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the current client thread.
<code>CORBA::NO_PERMISSION</code>	Only the transaction-originator thread can call this method.
<code>CORBA::OBJECT_NOT_EXIST</code>	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

For more information, see the *VisiBroker VisiTransact Guide*.

rollback_only()

```
void rollback_only()  
    raises(NoTransaction) ;
```

The method modifies the transaction associated with the client thread so that `rollback` is the only possible transaction outcome. The effect of this request is equivalent to calling the `rollback_only()` method on the corresponding Coordinator object. A client that is restricted from performing the `rollback()` operation, can nonetheless call `rollback_only()`.

Included in the Current interface in **CosTransactions.idl**.

Exceptions

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::NoTransaction</code>	No transaction is associated with the current client thread.

For more information, see the VisiBroker *VisiTransact Guide*.

set_timeout()

```
void set_timeout(in unsigned long seconds) ;
```

This method establishes a new timeout for transactions started by subsequent calls to the `Current::begin()` method in all threads within this program.

To establish a new timeout, use these values of the `seconds` parameter:

- = **0** Sets any subsequent transaction that is begun to the default transaction timeout for the VisiTransact Transaction Service instance that it uses.
- > **0** Sets the new timeout to the specified number of seconds. If the `seconds` parameter exceeds the maximum timeout valid for a VisiTransact Transaction Service instance being used, then the new timeout is set to that maximum, to bring it in range.

Note

When a transaction, created by a subsequent call to `begin()` in any thread in the process, takes longer to start transaction completion than the established timeout, it will be rolled back. If the timeout occurs before the transaction enters the completion stage (begins two-phase or one-phase processing) the transaction will be rolled back. Otherwise, the timeout is ignored.

Included in the Current interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
in unsigned long seconds	Numbers of seconds before timeout will occur on subsequent begin() operations.

No user exceptions are raised.

For more information see the description of `set_timeout()` in the VisiBroker *VisiTransact Guide*.

suspend() >

```
Control suspend();
```

This method suspends the transaction currently associated with the client thread and returns a Control object for that transaction. If the client thread is not associated with a transaction, a null object reference is returned.

The Control object can be passed to the `resume()` method to reestablish this context in the same thread or a different thread.

After the call to `suspend()`, no transaction is associated with the client thread. Any attempt to use `Current`, as if there were a transaction, will raise an exception, such as `CosTransactions::NoTransaction` or `CORBA::TRANSACTION_REQUIRED`, or return a null object reference.

Included in the Current interface in **CosTransactions.idl**.

No user exceptions are raised.

TransactionalObject interface

The TransactionalObject interface provides for the automatic propagation of transaction context on method calls of transactional objects. The TransactionalObject interface defines no methods.

Methods that work on transactions must have access to the transaction context.

The transaction context can be made available to such methods in two ways:

- **Explicit propagation.** A method receives and passes the transaction context as a Terminator, Control, Coordinator, or PropagationContext structure. For further information, see the VisiBroker *VisiTransact Guide*.
- **Implicit propagation.** The transaction context is passed automatically (and implicitly) on method calls. For further information, see the VisiBroker *VisiTransact Guide*.

Implicit propagation is the typical, and easiest, way. This is the capability that the `TransactionalObject` interface provides to your transactional objects.

For information about the details of what information is in the transaction context, see ["Structures" on page 152](#).

An instance of `TransactionalObject` can participate in implicit propagation. Implicit propagation is where the transaction context associated with the client thread is automatically propagated to `TransactionalObject` instances through method calls.

To use VisiTransact-managed transactions, all of your transactional objects must inherit from `TransactionalObject`. By using VisiTransact-managed transactions, you benefit from checked behavior.

The following example shows the `TransactionalObject` interface in the `CosTransactions.idl` file.

```
interface TransactionalObject
{
};
```

The transaction context is always passed implicitly to an object that inherits from `CosTransactions::TransactionalObject`. In addition, a program may be passed a transaction context explicitly, as a parameter.

TransactionFactory interface

As described in ["Current interface" on page 154](#), the Current interface enables a program to initiate VisiTransact-managed transactions. This section, by contrast, describes the `TransactionFactory` interface, which defines methods that enable a program to initiate non-VisiTransact-managed transactions. The `TransactionFactory` interface gives programs direct control over the propagation of transaction context.

In the `CosTransactions` module, the `TransactionFactory` interface provides three methods:

- `create()` Begins a transaction.
- `create_with_name()` Available if you are using the VISTransactions IDL interface (with the VisiBroker VisiTransact extensions).
- `recreate()` Creates a new representation of a transaction.

For further information about using different IDL files, see ["Choosing a Current interface" on page 154](#).

Note

You acquire a `TransactionFactory` object the way you do any CORBA object; for example, by binding.

Methods that are VisiBroker VisiTransact extensions are flagged by the icon where described or cross-referenced.

The following example shows the `CosTransactions` IDL for `TransactionFactory`.

```
...
interface TransactionFactory
{
    Control create(in unsigned long time_out);
    Control recreate(in PropagationContext ctx);
```

```
};  
...
```

The next example shows the VISTransactions IDL for TransactionFactory.

```
...  
interface TransactionFactory :  
CosTransactions::TransactionFactory  
{  
    CosTransactions::Control  
    create_with_name(in unsigned long time_out,  
                    in string user_transaction_name);  
};...  
...
```

TransactionFactory methods

create()

```
CosTransactions::Control create(in unsigned long  
time_out);
```

This method accepts a timeout parameter (`time_out`) and creates a new transaction. It returns a Control object. The Control object can be used to manage or to control participation in the new transaction. The Control object can be used by any thread and passed around explicitly, just like any other CORBA object.

Note

Checked behavior cannot be provided for transactions that use this method.

Included in the TransactionFactory interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
in unsigned long time_out	A timeout, in seconds, that applies to this invocation only.

To establish a new timeout, use the following values of the `time_out` parameter.

- = 0 Sets any subsequent transaction that is begun to the default transaction timeout for the VisiTransact Transaction Service instance that it uses.
- > 0 Sets the new timeout to the specified number of seconds. If the seconds parameter exceeds the maximum timeout valid for a VisiTransact Transaction Service instance being used, then the new timeout is set to that maximum.

Note

If a transaction does not start transaction completion (begin two-phase or one-phase processing) before the timeout expires, it will be rolled back.

The new timeout applies only to the transaction created on this call.

See the description of `set_timeout()` in the VisiBroker VisiTransact Guide.

No user exceptions are raised.

```

create_with_name()

CosTransactions::Control
  create_with_name(in unsigned long time_out,
                  in string user_transaction_name);

```

This VISTransactions method extends the CosTransactions::TransactionFactory::create() method by enabling you to create a new transaction and assign it an informational transaction name that can be used for debugging and error reporting. The user-defined transaction name is included in the value returned by get_transaction_name().

Note

Checked behavior cannot be provided for transactions that use this method.

This method returns a Control object. The Control object can be used to manage or to control participation in the new transaction. The Control object can be used by any thread and passed around explicitly, just like any other CORBA object.

Included in the TransactionFactory interface in **VISTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
in unsigned long time_out	A timeout, in seconds, for this transaction.
in string user_transaction_name	This user-defined informational transaction name can be used to trace transactions and debug applications.

To establish a new timeout, use these values of the `time_out` parameter:

- = **0** Sets any subsequent transaction that is begun to the default transaction timeout for the VisiTransact Transaction Service instance that it uses.
- > **0** Sets the new timeout to the specified number of seconds. If the seconds parameter exceeds the maximum timeout valid for VisiTransact Transaction Service instance being used, then the new timeout is set to that maximum.

Note

If a transaction does not start transaction completion (begin two-phase or one-phase processing) before the timeout expires, it will be rolled back.

The new timeout applies only to the transaction created on this call.

See the description of `set_timeout()` in the VisiBroker *VisiTransact Guide*.

No user exceptions are raised.

For more information, see the VisiBroker *VisiTransact Guide*.

recreate()

```
Control recreate(in PropagationContext context);
```

Most applications will not normally call this method.

This method creates a new Control object using its PropagationContext parameter. The Control object can be used to manage or to control participation in the transaction.

To get a transaction's `PropagationContext`, invoke the `get_txcontext()` method on the transaction's Coordinator object.

Included in the `TransactionFactory` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>in PropagationContext context</code>	Context of the transaction to import.

No user exceptions are raised.

The following example shows the way `get_txcontext()` and `recreate()` work together to recreate a transaction.

```
...
CosTransactions::Coordinator_var coord;
CosTransactions::TransactionFactory_var newDomainFactory;
...
propctxt = coord->get_txcontext();
CosTransactions::Control_var control = newDomainFactory-
>recreate(propctxt);
...
```

Control interface

The Control interface enables a program to explicitly manage or propagate a transaction context. A Control object is implicitly associated with one specific transaction.

The Control interface defines two methods:

- `get_coordinator()`
- `get_terminator()`

The `get_coordinator()` method returns a Coordinator object, which supports methods used by participants in the transaction. The `get_terminator()` method returns a Terminator object, which supports methods to complete the transaction. The Terminator and Coordinator objects support methods that are typically performed by different parties. Providing two objects enables each set of methods to be made available only to the parties that require those methods.

The example below contains the IDL for the Control interface, an excerpt from the **CosTransactions.idl** file.

```
...
interface Control
{
    Terminator get_terminator()
        raises(Unavailable);
    Coordinator get_coordinator()
        raises(Unavailable);
};
```

You can obtain a Control object by using one of the methods of the `TransactionFactory`. See “[TransactionFactory interface](#)” on page 168. You can also obtain a Control object for the current transaction (associated with a thread) through methods of the Current object.

```
get_coordinator()
Coordinator get_coordinator()
    raises(Unavailable);
```

This method returns a Coordinator object. The Coordinator provides methods that are called by participants in a transaction. These participants are typically either recoverable objects or agents of recoverable objects.

Included in the Control interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Unavailable	The Control object cannot provide the requested Coordinator object.

For more information, see “Coordinator interface” on page 175 for details on methods you can use once you obtain the Coordinator object.

```
get_terminator()
```

```
Terminator get_terminator()
    raises(Unavailable);
```

This method returns a Terminator object. The Terminator can be used to rollback or commit the transaction associated with the Control. The Unavailable exception is raised if the Control cannot provide the requested object due to the inability of the Terminator object to be transmitted to or be used in other execution environments.

Included in the Control interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Unavailable	The Control object cannot provide the requested Terminator object.

For more information, see the **VisiBroker VisiTransact Guide**.

Terminator interface

The Terminator interface supports methods to commit or rollback a transaction. Typically, these methods are used by the transaction originator, but any program that has access to a Terminator object for that transaction can commit or rollback the transaction.

The following example contains the IDL for the Terminator interface, an excerpt from the **CosTransactions.idl** file.

```
...
interface Terminator
{
    void commit(in boolean report_heuristics)
        raises (HeuristicMixed,
                HeuristicHazard);
    void rollback();
};

...
```

Terminator methods

```
commit()

void commit(in boolean report_heuristics)
    raises(HeuristicMixed,
          HeuristicHazard) ;
```

Before committing the transaction, this method performs some checks. If the transaction has not been marked rollback only, and all of the participants in the transaction agree to commit, the transaction is committed and the operation terminates normally. Otherwise, the transaction is rolled back and the CORBA::TRANSACTION_ROLLEDBACK standard exception is raised.

If the `report_heuristics` parameter is true, the VisiTransact Transaction Service will report inconsistent or possibly inconsistent outcomes using the `CosTransactions::HeuristicMixed` and `CosTransactions::HeuristicHazard` exceptions when appropriate. Information about the Resources involved in a heuristic outcome will be written to a heuristic log file corresponding to the instance of the VisiTransact Transaction Service. For more information on heuristics, see the VisiBroker *VisiTransact Guide*.

When a transaction is committed, all changes to recoverable objects made in the scope of this transaction are made permanent and visible to other transactions or clients.

Included in the Terminator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>report_heuristics</code>	true: Requests that the <code>HeuristicMixed</code> or <code>HeuristicHazard</code> exceptions be raised, when appropriate. false: Requests that the heuristic information is not returned to the program.

The following exceptions may be raised when calling this method.

Exception	When thrown
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision was made. Some relevant updates have been committed, and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.
<code>CORBA::TRANSACTION_ROLLEDBACK</code>	The transaction has been marked for rollback.
<code>CORBA::OBJECT_NOT_EXIST</code>	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

The example below shows how to use the `commit()` method with and without heuristics.

```
// Using commit() without heuristics.  
try  
{  
    terminator->commit(0);  
}  
catch(CORBA::TRANSACTION_ROLLEDBACK&)  
{  
    cerr << "Transaction failed" << endl;  
}  
..  
// Using commit() with heuristics.  
try  
{  
    terminator->commit(1);  
}  
catch(CORBA::TRANSACTION_ROLLEDBACK&)  
{  
    cerr << "Transaction failed" << endl;  
}  
catch(CosTransactions::HeuristicMixed&)  
{  
    cerr << "HeuristicMixed exception was raised" << endl;  
}  
catch(CosTransactions::HeuristicHazard&)  
{  
    cerr << "HeuristicHazard exception was raised" << endl;  
}  
catch(CORBA::OBJECT_NOT_EXIST&)  
{  
    cerr << "Transaction no longer exists" << endl;  
}
```

For more information, see the VisiBroker *VisiTransact Guide*.

```
rollback()  
void rollback();
```

This method rolls back the transaction. When a transaction is rolled back, all changes to recoverable objects made in the scope of this transaction are rolled back. All Resources locked by the transaction are made available to other transactions as appropriate to the degree of isolation enforced by the Resources.

This method does not return until the transaction is complete and all related Synchronization objects have been notified. Any heuristic outcome that may occur will be provided through the Console.

Included in the Terminator interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CORBA::NO_PERMISSION	Only the transaction-originator thread can call this method.
CORBA::OBJECT_NOT_EXIST	It is unknown whether the transaction was committed or rolled back because a different thread or process could have terminated the transaction already. For example, the transaction has already timed out.

For more information, see the VisiBroker *VisiTransact Guide*.

Coordinator interface

The Coordinator interface provides methods that are used by participants in a transaction. These participants are typically either recoverable objects or agents of recoverable objects. Each Coordinator is implicitly associated with a single transaction.

The following example shows the CosTransactions IDL for the Coordinator interface.

```
...
interface Coordinator
{
    Status get_status();
    Status get_parent_status();
    Status get_top_level_status();

    boolean is_same_transaction(in Coordinator coord);
    boolean is_related_transaction(in Coordinator coord);
    boolean is_ancestor_transaction(in Coordinator coord);
    boolean is_descendant_transaction(in Coordinator coord);
    boolean is_top_level_transaction();

    unsigned long hash_transaction();
    unsigned long hash_top_level_tran();

    RecoveryCoordinator register_resource(in Resource
resource)
        raises(Inactive);

    void register_synchronization(in Synchronization synch)
        raises(Inactive, SynchronizationUnavailable);

    void register_subtran_aware(in
SubtransactionAwareResource resource)
        raises(Inactive, NotSubtransaction);

    void rollback_only()
        raises(Inactive);

    string get_transaction_name();

    Control create_subtransaction()
        raises(SubtransactionsUnavailable, Inactive);

    PropagationContext get_txcontext()
        raises(Unavailable);
};
```

Because VisiTransact does not support nested transactions, several of the Coordinator methods have become equivalent--that is, they return the same result. More information is provided later in the section with the method descriptions.

The following methods are equivalent:

- `get_status()`
- `get_top_level_status()`

- `get_parent_status()`

Similarly, certain methods return true only when the target object and the parameter refer to the same Coordinator object. Therefore, the following methods are also equivalent:

- `is_same_transaction()`
- `is_related_transaction()`
- `is_ancestor_transaction()`
- `is_descendant_transaction()`

And, the following methods are equivalent:

- `hash_transaction()`
- `hash_top_level_tran()`

Finally, without nested transactions, the `create_subtransaction()` method is not useful and is therefore excluded from this version of VisiTransact (and this documentation), although it is described in the OMG specification.

Coordinator methods

`get_parent_status()`

```
Status get_parent_status();
```

Because VisiTransact does not support nested transactions, every transaction is top-level, and `get_parent_status()` of a top-level transaction is equivalent to `get_status()`, by OMG definition. For further information, see “[“recreate\(\)” on page 170](#)”.

Included in the Coordinator interface in **CosTransactions.idl**.

`get_status()`

```
Status get_status();
```

This method returns the status of the transaction associated with the target object, as an enumerated value (enum `Status`). If there is no transaction associated with the target object, then the method returns the value `StatusNoTransaction`.

The following are the possible return values, as defined in

CosTransactions.idl:

- `StatusActive`
- `StatusMarkedRollback`
- `StatusPrepared`
- `StatusCommitted`
- `StatusRolledBack`
- `StatusUnknown`
- `StatusNoTransaction`
- `StatusPreparing`
- `StatusCommitting`
- `StatusRollingBack`

For information about each Status value, see “[Status value definitions](#)” on page 160.

Included in the Coordinator interface in **CosTransactions.idl**.

For more information, see the *VisiBroker VisiTransact Guide*.

get_top_level_status()

```
Status get_top_level_status();
```

Because VisiTransact does not support nested transactions, every transaction is top-level. Therefore, this method is equivalent to the get_status() method.

Included in the Coordinator interface in **CosTransactions.idl**.

get_transaction_name()

```
string get_transaction_name();
```

This method returns a printable string that is a descriptive name for the transaction. This method is intended to assist with diagnostics and debugging. If the transaction was created by the VISTransactions::TransactionFactory::create_with_name() method, the return string is the user-defined descriptive transaction name rather than the VisiTransact Transaction Service-generated name. If there is no transaction associated with the client thread, an empty string is returned.

Included in the Coordinator interface in **CosTransactions.idl**.

For more information, see the *VisiBroker VisiTransact Guide*.

get_txcontext()

```
PropagationContext get_txcontext()
    raises(Unavailable);
```

Most applications will not normally call this method.

The get_txcontext() method returns a PropagationContext, which can be used by one VisiTransact Transaction Service domain to export a transaction to a new VisiTransact Transaction Service domain.

Included in the Coordinator interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Unavailable	The VisiTransact Transaction Service restricts the availability of the PropagationContext.

hash_top_level_tran()

```
unsigned long hash_top_level_tran();
```

Most applications will not normally call this method.

Because VisiTransact does not support nested transactions, every transaction is a top-level transaction. Therefore, this method is equivalent to the hash_transaction() method.

This method returns a hash code for the transaction associated with the target object. Each transaction has a single hash code. The hash code can be used to efficiently compare Coordinators for inequality against the hash codes of other transactions. If the hash codes of two Coordinators are not equal, then they represent different transactions. If two hash codes are equal, then Coordinator::is_same_transaction() must be used to guarantee equality or inequality, because two Coordinators might have the same hash code but, in fact, represent two different transactions.

Included in the Coordinator interface in **CosTransactions.idl**.

For more information, see the **VisiBroker VisiTransact Guide**.

hash_transaction()

```
unsigned long hash_transaction();
```

Most applications will not normally call this method.

This method returns a hash code for the transaction associated with the target object. Each transaction has a single hash code. The hash code can be used to efficiently compare Coordinators for inequality against the hash codes of other transactions. If the hash codes of two Coordinators are not equal, then they represent different transactions. If two hash codes are equal, then Coordinator::is_same_transaction() must be used to guarantee equality or inequality, because two Coordinators might have the same hash code but, in fact, represent two different transactions.

Included in the Coordinator interface in **CosTransactions.idl**.

The example below shows a method that uses hash_transaction() to efficiently reject unequal Coordinators.

```
CORBA::Boolean are_same(Coord1, Coord2)
{
    CORBA::ULong hash1 = Coord1->hash_transaction();
    CORBA::ULong hash2 = Coord2->hash_transaction();
    if(hash1 != hash2)
    {
        return 0;
    }
    else
    {
        return Coord1->is_same_transaction(Coord2);
    }
}
```

For more information, see the **VisiBroker VisiTransact Guide**.

is_ancestor_transaction()

```
boolean is_ancestor_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

```
is_descendant_transaction()
boolean is_descendant_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

```
is_related_transaction()
```

```
boolean is_related_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method returns true if, and only if, the target object and the parameter object refer to the same transaction.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

```
is_same_transaction()
```

```
boolean is_same_transaction(in Coordinator coord);
```

This method returns true if, and only if, the target object and the parameter object both refer to the same transaction.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

For more information, see the VisiBroker *VisiTransact Guide*.

```
is_top_level_transaction()
```

```
boolean is_top_level_transaction(in Coordinator coord);
```

Because VisiTransact does not support nested transactions, this method always returns true.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
coord	The Coordinator with which the target Coordinator is compared.

For more information, see the VisiBroker *VisiTransact Guide*.

register_resource()

```
RecoveryCoordinator register_resource(in Resource
    resource)
    raises(Inactive);
```

This method registers the specified Resource as a participant in the transaction associated with the target object. When the transaction is terminated, the Resource will receive requests to prepare, commit, or rollback the updates performed as part of the transaction. For information on Resource methods, see "["Resource interface" on page 182](#)".

This method returns a RecoveryCoordinator that can be used by this Resource during recovery.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.
CORBA::TRANSACTION_ROLLEDBACK	This exception is thrown if the transaction has been marked for rollback.

register_synchronization()

```
void register_synchronization(in Synchronization synch)
    raises(Inactive, SynchronizationUnavailable);
```

This method registers the specified Synchronization object so that it will be notified to perform the necessary processing before and after completion of the transaction. Such methods are described in the description of the Synchronization interface; see "["Synchronization interface" on page 186](#)".

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
synch	The Synchronization object to register.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.

Exception	When thrown
CosTransactions::SynchronizationUnavailable	This exception is never raised.
CORBA::TRANSACTION_ROLLEDBACK	This exception is thrown if the transaction has been marked for rollback.

For more information, see “[Resource interface](#)” on page 182, and “[Synchronization interface](#)” on page 186 and see the **VisiBroker VisiTransact Guide**.

register_subtran_aware()

```
void register_subtran_aware(in
    SubtransactionAwareResource resource)
    raises(Inactive, SubtransactionsUnavailable);
```

Because VisiTransact does not support nested transactions, this method always raises CosTransactions::SubtransactionsUnavailable.

Included in the Coordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource to be registered with the subtransaction.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is never thrown.
CosTransactions::SubtransactionsUnavailable	This exception is thrown whenever this method is invoked.

rollback_only()

```
void rollback_only()
    raises (Inactive);
```

This method modifies the transaction associated with the Coordinator so that rollback is the only possible transaction outcome.

Included in the Coordinator interface in **CosTransactions.idl**.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::Inactive	This exception is thrown if the transaction has already been prepared.

For more information about invoking `rollback_only()`, see the VisiBroker **VisiTransact Guide**.

RecoveryCoordinator interface

When a Resource is registered with the Coordinator, a RecoveryCoordinator is returned. The RecoveryCoordinator is implicitly associated with a single Resource registration request and can only be used by that Resource. In

case recovery is necessary, the Resource can use the RecoveryCoordinator during the recovery process.

Also, the Resource can use the RecoveryCoordinator if it needs to know the current status of the transaction. For example, the Resource can set its own timeout, and if commit or rollback does not occur within the timeout, the Resource can invoke `replay_completion()` to determine the status of the transaction.

The following example shows the RecoveryCoordinator interface in the **CosTransactions.idl** file.

```
...
interface RecoveryCoordinator
{
    Status replay_completion(in Resource resource)
        raises(NotPrepared);
};

...
```

RecoveryCoordinator methods

`replay_completion()`

```
Status replay_completion(Resource resource)
    raises(NotPrepared);
```

This method notifies the VisiTransact Transaction Service that the Resource is available. This method is typically used during recovery, and can be used by the Resource to determine the status of the transaction.

Note

This method does not initiate completion.

Included in the RecoveryCoordinator interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
resource	The Resource for which the recovery is being undertaken.

The following exceptions may be raised when calling this method.

Exception	When thrown
CosTransactions::NotPrepared	This exception is thrown if <code>replay_completion()</code> is called for a Resource that has not yet been prepared.

For more information on Status values, see “[Status value definitions](#)” on page 160 in “[Current interface](#)” on page 154.

Resource interface

VisiBroker VisiTransact uses a two-phase commit protocol to complete a top-level transaction with each Resource registered with it--that is, with each Resource that might change during the transaction. The Resource interface defines the methods invoked by the VisiTransact Transaction Service on each Resource. Each object supporting the Resource interface is implicitly associated with a single top-level transaction.

The following example shows the Resource interface in the **CosTransactions.idl** file.

```
...
interface Resource
{
    Vote prepare()
        raises(
            HeuristicMixed,
            HeuristicHazard
        );
    void rollback()
        raises(
            HeuristicCommit,
            HeuristicMixed,
            HeuristicHazard
        );
    void commit()
        raises(
            NotPrepared,
            HeuristicRollback,
            HeuristicMixed,
            HeuristicHazard
        );
    void commit_one_phase()
        raises(
            HeuristicHazard
        );
    void forget();
}
...
```

VisiBroker VisiTransact provides this interface, but you must provide the implementation in your Resource. A typical application does not implement a Resource.

Resource methods

```
commit()

void commit()
    raises(NotPrepared
        HeuristicRollback
        HeuristicMixed
        HeuristicHazard
    );
```

This method attempts to commit all changes associated with the Resource. If a heuristic outcome exception is raised, the Resource must keep the heuristic decision in persistent storage until the `forget()` method is performed so that it can return the same outcome in case `commit()` is invoked again during recovery. Otherwise, the Resource can immediately forget all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions may be thrown when calling this method.

Exception	When thrown
CosTransactions::Not Prepared	The <code>commit()</code> method was called before the <code>prepare()</code> method was called.
CosTransactions::HeuristicRollback	A heuristic decision was made and all relevant updates have been rolled back.
CosTransactions::HeuristicMixed	A heuristic decision was made. Some relevant updates have been committed and others have been rolled back.
CosTransactions::HeuristicHazard	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.

For more information, see the VisiBroker *VisiTransact Guide*.

`commit_one_phase()`

```
void commit_one_phase()
    raises (HeuristicHazard);
```

The `commit_one_phase()` method requests the Resource to commit all changes made as part of the transaction. This method is an optimization for use when a transaction has only one participating Resource. The `commit_one_phase()` method can be called on the Resource, instead of first calling `prepare()` and then `commit()` or `rollback()`.

If a heuristic outcome exception is raised, the Resource must keep the heuristic decision in persistent storage until the `forget()` method is performed. This enables the Resource to return the same outcome in case `commit_one_phase()` is performed again during recovery. Otherwise, the Resource immediately forgets all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

If a failure occurs during `commit_one_phase()`, it is called again when the failure is repaired. Since there is only a single Resource, the `HeuristicHazard` exception is used to report heuristic decisions related to that Resource.

The following exceptions may be thrown when calling this method.

Exception	When thrown
CosTransactions::HeuristicHazard	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back.
CORBA::TRANSACTION_ROLLEDBACK	The <code>commit_one_phase()</code> method cannot commit all changes made as part of the transaction.

For more information, see the VisiBroker *VisiTransact Guide*.

```
forget()  
  
void forget();
```

When VisiBroker VisiTransact receives a heuristic exception, it records the exception. The VisiTransact Transaction Service will ultimately call `forget()` on the Resource. This means that the Resource can discard all information about the transaction that raised the heuristic exception. This method is called only if a heuristic exception was raised from `rollback()`, `commit()`, or `commit_one_phase()`.

Included in the Resource interface in **CosTransactions.idl**.

For more information, see the VisiBroker *VisiTransact Guide*.

```
prepare()
```

```
Vote prepare()  
    raises(HeuristicMixed  
          HeuristicHazard  
    ) ;
```

This method performs the prepare operation--the first step in the two-phase commit protocol for a Resource object. When finished, the method returns one of these Vote values.

- **VoteReadOnly**--No persistent data associated with the Resource has been modified by the transaction.
- **VoteCommit**--The following data has been saved to persistent storage:
 - a All data changed as part of the transaction
 - b A reference to the RecoveryCoordinator object
 - c An indication that the Resource has been prepared
- **VoteRollback**--Some circumstance has caused the Resource to call for a rollback, such as inability to save the relevant data, inconsistent outcomes, or no knowledge of the transaction (which might happen after a crash).

After returning `VoteReadOnly` or `VoteRollback`, the Resource can forget all knowledge of the transaction.

If a heuristic outcome exception is raised, the Resource must save the heuristic decision in persistent storage until the `forget()` method is called so that it can return the same outcome in case `prepare()` is called again.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions may be thrown when calling this method.

Exception	When thrown
<code>CosTransactions::HeuristicMixed</code>	A heuristic decision has been made. Some relevant updates have been committed and others have been rolled back.
<code>CosTransactions::HeuristicHazard</code>	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.

For more information, see the *VisiBroker VisiTransact Guide*.

```

rollback()

void rollback()
    raises(HeuristicCommit
           HeuristicMixed
           HeuristicHazard
    );

```

This method rolls back all updates associated with the Resource object.

If a heuristic outcome exception is raised, the Resource must save the heuristic decision in persistent storage until the `forget()` method is invoked. This enables the Resource to return the same outcome in case `rollback()` is called again during recovery. Otherwise, the Resource immediately forgets all knowledge of the transaction.

Included in the Resource interface in **CosTransactions.idl**.

The following exceptions that may be raised when calling this method.

Exception	When thrown
CosTransactions:: HeuristicCommit	A heuristic decision was made and all relevant updates have been committed.
CosTransactions:: HeuristicMixed	A heuristic decision was made and some relevant updates have been committed, and others have been rolled back.
CosTransactions:: HeuristicHazard	A heuristic decision may have been made, the disposition of all relevant updates is not known. For those updates whose disposition is known, either all have been committed or all have been rolled back. If the known updates are a mixture of commits and rollbacks, then the <code>HeuristicMixed</code> exception is raised.

For more information, see the **VisiBroker VisiTransact Guide**.

Synchronization interface

The Synchronization interface defines methods that enable a transactional object to be notified before the start of the two and one-phase commit protocol, and after its completion, as described in the VisiBroker *VisiTransact Guide*.

In the `CosTransactions` module, the Synchronization interface provides two methods:

- `before_completion()` --Ensures that `before_completion()` is invoked before starting to commit a transaction.
- `after_completion()` --Ensures a transactional object is notified after the transaction has been completed. This applies to all transactions whether they were committed or rolled back.

Here are two limitations you should be aware of:

- If the VisiTransact Transaction Service cannot contact your Synchronization object while trying to call `before_completion()`, then the transaction will be rolled back. If a Synchronization object is unavailable after completion, it will be ignored.
- When the VisiTransact Transaction Service instance recovers from a failure, it does not remember Synchronization objects, and will only replay completion and not Synchronization objects. If a failure occurs,

the Synchronization object will not be notified of how the transaction was completed by the VisiTransact Transaction Service.

Note

In certain cases, `after_completion()` is called when `before_completion()` was not called. `before_completion()` is called only if a transaction is still continuing towards a commit at the outset of completion. `after_completion()` is always called (unless the VisiTransact Transaction Service crashes before the transaction completes).

Synchronization objects are not recoverable. If an instance of a VisiTransact Transaction Service fails, any transactions that are completed will not involve Synchronization objects.

Note

Although the signatures of these methods are fixed by the Synchronization interface, their implementations are user-defined. This enables an application to do custom processing at key points in a transaction--before and after transaction completion.

The following example shows the CosTransactions IDL for the Synchronization interface.

```
...
interface Synchronization : TransactionalObject
{
    void before_completion();
    void after_completion(in Status status);
};

...
```

Synchronization methods

`after_completion()`

```
void after_completion(in Status status);
```

This is a method that you write that performs customized processing after the completion of the transaction. It is essentially a callback.

Note

The `after_completion()` method is always invoked during normal processing.

As shown above, IDL for the Synchronization interface inherits from the TransactionalObject interface. As a programmer, you are responsible for writing the implementation of an `after_completion()` method that conforms to the IDL.

If `after_completion()` is to be called in processing a particular transaction, the following actions must be taken:

- A Synchronization object must be created, by the transaction originator or some other transaction participant.
- The Synchronization object must be registered by getting the transaction's Coordinator, and calling the `register_synchronization()` method in Coordinator and Current. See "["register_synchronization\(\)" on page 164](#) in "["Coordinator interface" on page 175](#).

Registration must be done after the transaction is created and before the start of the two-phase commit.

Multiple Synchronization objects can be created and registered for a single transaction.

The VisiTransact Transaction Service calls this method after the two-phase commit protocol completes. As an example of its use, `after_completion()` can be used by a transactional object to discover the outcome of the transaction. This is particularly useful for transactional objects that are not also recoverable objects, and so are not automatically notified of the outcome.

You can call `get_status()` to see whether or not the transaction has been marked for rollback.

Notice that because `Synchronization` inherits from `TransactionalObject`, the transaction context will be available through the `Current` object.

Included in the `Synchronization` interface in **CosTransactions.idl**.

The following parameters are used by this method.

Parameter	Description
<code>status</code>	A Status value passed by the Terminator to the <code>Synchronization</code> object once the outcome of the transaction has been determined.

All exceptions will be ignored.

For more information see the VisiBroker *VisiTransact Guide*.

`before_completion()`

```
void before_completion();
```

This is a method that you write to perform customized processing at the onset of the completion of a transaction. It is called only if the transaction is still continuing towards successful completion. It is essentially a callback.

Note

The `before_completion()` method is invoked after the application invokes `commit()`, but before the VisiTransact Transaction Service begins transaction completion. The `before_completion()` method is not invoked for a rollback request.

As shown in the beginning of this section the IDL for the `Synchronization` interface inherits from the `TransactionalObject` interface. As a programmer, you are responsible for writing the implementation of a `before_completion()` method that conforms to the IDL.

If `before_completion()` is to be called when processing a particular transaction, the `Synchronization` object must be registered using the `register_synchronization()` method in the `Coordinator` interface. Register the `Synchronization` object from your transactional object or recoverable server. Registration must be done after the transaction is created and before the start of the two-phase commit.

Multiple `Synchronization` objects can be created and registered for a single transaction.

The VisiTransact Transaction Service calls this method after the transaction work has been done but before the two-phase commit protocol starts; that is, `before_prepare()` is called on the participating Resource. VisiBroker

VisiTransact calls `before_completion()` only if a transaction is still continuing towards a commit at the outset of completion. This means that `Terminator->commit()` was called and the transaction has not been marked for rollback. If `Terminator->rollback()` was called, or the first of several Synchronization objects marked the transaction for rollback, or the transaction was already marked for rollback, `before_completion()` calls will not be called again for this transaction.

Within this method, you can ensure the transaction will be rolled back by calling the `rollback_only()` method. You can also call `get_status()` to see whether or not the transaction has been marked for rollback. At the time the method is called, however, you cannot rely upon the status to indicate whether or not the transaction will actually be committed.

Notice that because the Synchronization interface inherits from `TransactionalObject`, the transaction context will be available through the `Current` object. This means that `before_completion()` can use all objects on the `Current` object, such as `get_status()` and `get_control()`.

Included in the Synchronization interface in **CosTransactions.idl**.

All CORBA exceptions raised by your Synchronization objects will result in the transaction being rolled back.

For more information see the **VisiBroker VisiTransact Guide**.

VISTransactionService class

The VIStansactionService class is provided to help you link an instance of the VisiTransact Transaction Service with your application process.

Its methods, in the **visits.h** file, include:

- `init()`
- `terminate()`

The following section documents these methods.

VIStansactionService methods

`init()`

```
static void init(int &argc, char* const* argv);
```

This method initializes all the instances of the VisiTransact Transaction Service that are linked in your application process. It must be invoked to activate an instance of the VisiTransact Transaction Service that you have linked into your process by adding the **ots_r** library and the **otsinit** object file to the link line.

If you want to initialize the embedded instance of the VisiTransact Transaction Service, the `init()` method must be called. After `ORB_init()` has been invoked, all the recognized VisiTransact arguments will be stripped from the original parameter list so that they will not interfere with any other argument processing that your client program requires.

Caution

If the in-process VisiTransact Transaction Service instance has been deactivated using `terminate()`, **vshutdown**, or the Console, do not invoke `init()` again.

Included in the VIStansactionService interface in **visits.h**.

The following parameters are used by this method.

Parameter	Description
argc	The number of arguments being passed to the <code>init()</code> method.
argv	The actual arguments being passed to the <code>init()</code> method.

Note

The `argc` and `argv` parameters should be `argc` and `argv` from the `main` function.

`terminate()`

```
static void terminate();
```

This method will cleanup all the instances of the VisiTransact Transaction Service that have been initialized by a call to `init()`. This method will not bring down your application process unless the command line option `OTSExit_on_shutdown` is set to 1.

If this option is either not set, or set to 0, it will deactivate the VisiTransact Transaction Service objects registered with the Smart Agent but will NOT bring down your application process.

Included in the `VISTransactionService` interface in **`visits.h`**.

For more information, see the ***VisiBroker VisiTransact Guide***.

Commands and arguments

This section provides information about arguments for VisiTransact Transaction Manager commands and `ORB_init()`.

Overview of VisiTransact commands

The commands in the next few sections relate to one another as described in the following table.

VisiTransact Transaction Manager component	Related commands
VisiBroker Console	"vbconsolew" on page 190 . This command starts the VisiBroker Console.
VisiTransact Transaction Service	"ots" on page 191 . This command starts an instance of the VisiTransact Transaction Service. "vshutdown" on page 191 . This command shuts down an instance of the VisiTransact Transaction Service.

`vbconsolew`

This command invokes the VisiBroker Console, and can be run on any node that has the executable for the Console installed. The Console does not have to be local to the VisiTransact Transaction Service instances that it administers. However, to administer these instances, they must be running when the Console is started.

Syntax

```
prompt>vbconsolew
```

Arguments

None.

ots

This command starts an instance of the VisiTransact Transaction Service.

Syntax

```
prompt>ots [-Dvbroker.ots.defaultTimeout=<seconds>]
           [-Dvbroker.ots.defaultMaxTimeout=<seconds>]
           [-Dvbroker.ots.name=<transaction_service_name>]
           [-Dvbroker.ots.logDir=<directory_name>]
           [-Dvbroker.ots.iorFile=<ior_file_name>]
```

Example

```
prompt>ots -Dvbroker.ots.defaultTimeout=60
           -Dvbroker.ots.defaultMaxTimeout=120
           -Dvbroker.ots.name=Sales
```

Arguments

The following arguments can be used with this command.

Argument	Description
-Dvbroker.ots.defaultTimeout =<seconds>	Sets the default transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 600 seconds.
-Dvbroker.ots.defaultMaxTimeout =<seconds>	Sets the maximum allowed transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 3600 seconds.
-Dvbroker.ots.name= <transaction_service_name>	Sets the name of the VisiTransact Transaction Service instance used when registering its interface with the Smart Agent. The default is <host_name>_ots.
-Dvbroker.ots.logDir= <directory_name>	Names the directory in which logs and logger information are kept. If you do not specify, the default is <VBROKER ADM>\its\<transaction_service_name>\logger.
-Dvbroker.ots.iorFile= <ior_file_name>	Takes in a file name whereby the IOR of the transaction service will be written into. If this option is not given or filename given by this option is not accessible, the IOR of the transaction service will be written to STDOUT.

vshutdown

This command can be used to shutdown the VisiTransact Transaction Service and the VisiTransact XA Resource Director.

If it is used to shutdown an instance of the VisiTransact Transaction Service, it defaults to allow the VisiTransact Transaction Service to wait for outstanding transactions to complete before shutting down, but will not accept any new transactions. You can direct the instance of the VisiTransact Transaction Service to shutdown without resolving transactions by using the optional -immediate argument.

Note

You can use this command to shutdown an instance of the VisiTransact Transaction Service that is embedded within an application process provided the `-Dvbroker.ots.exitOnShutdown` argument was passed to the application's `ORB_init()` method. For information about shutting down an instance of the VisiTransact Transaction Service that is embedded in an application process, see ["Arguments for applications with an embedded VisiTransact Transaction Service instance" on page 194](#).

Syntax

```
prompt>vshutdown -help  
prompt>vshutdown -type <object_type>  
  [-name <object_name>]  
  [-host <host_name>]  
  [-immediate]  
  [-noprompt]
```

Example

```
prompt>vshutdown -type ots -name myTxnSvc
```

Arguments

The following arguments can be used with this command.

Argument	Description
<code>-help</code>	Use this argument to display the usage information for this command. If you use this argument, vshutdown ignores all other arguments and just gives you usage information.
<code>-type</code>	Valid types are: <code>ots</code> --VisiTransact Transaction Service <code>rd</code> --VisiTransact XA Resource Director If you specify only the type, vshutdown lists all the services of that particular type and prompts you whether to shut them down or not.
<code>-name</code> <code><object_name></code>	The name of the object to be shutdown. By default vshutdown looks up all the objects of the specified type and prompts you whether to shut them down or not.
<code>-host</code> <code><host_name></code>	The host machine where the service resides that you wish to shutdown. By default vshutdown locates all the objects of a particular type and name (if mentioned) on the network and prompts you whether to shut them down or not.
<code>-immediate</code>	Use this argument to direct the instance of the VisiTransact Transaction Service to shutdown immediately without resolving any outstanding transactions.
<code>-noprompt</code>	Use this argument if you do not want to be prompted for confirmation when you get a list of all object types, names, or hosts to be shut down.

Command-line arguments for applications

You can pass arguments to `ORB_init()` (or `ORB.init()` for Java applications) which affect the VisiTransact Transaction Service and your application components. The following sections explain these options.

Passing command-line arguments to `ORB_init()` using `argc` and `argv`

As a component of VisiBroker, command line arguments are passed to VisiTransact Transaction Manager components through the VisiBroker ORB initialization call `ORB_init()`. Therefore, in order for arguments specified on the command line to have effect on the VisiTransact operation in a given application process, applications must pass the original `argc` and `argv` arguments to `ORB_init()` from the main program. For example:

```
int main(int argc, char * const* argv)
{
    try
    {
        // initialize the ORB
        CORBA::ORB_var orb = CORBA::ORB_init(argc, argv);
    }
    ...
}
```

The `ORB_init()` function will parse both ORB arguments and VisiTransact Transaction Manager arguments, removing them from the `argv` vector before returning.

For Java, the command-line arguments are passed to `org.omg.CORBA.ORB.init()`. For example,

```
public static void main(String[] args) throws Exception
{
    org.omg.CORBA.ORB orb = org.omg.CORBA.ORB.init(args,
    null);
    ...
}
```

Arguments for applications that originate transactions

By default, the first time you start a transaction with `Current::begin()`, an instance of the VisiTransact Transaction Service is found using the Smart Agent. You can specify an instance of the VisiTransact Transaction Service to use, and the timeout value for transactions, by using the arguments described in this section.

You pass these arguments at the command line when starting your transactional server manually. Your application handles these command-line input arguments using the `ORB_init()` method as described in “[Passing command-line arguments to `ORB_init\(\)` using `argc` and `argv`](#)” on page 193.

The following table explains the arguments that can be passed to `ORB_init()` from the command line for applications that originate transactions.

Argument to <code>ORB_init()</code>	Description
<code>-Dvbroker.ots.currentFactory</code>	VisiTransact Transaction Manager uses the specified IOR for the requested Transaction Service (<code>CosTransactions::TransactionFactory</code>) to locate the desired instance of the VisiTransact Transaction Service on the network. This argument enables VisiTransact Transaction Manager to operate without the use of a Smart Agent (osagent).
<code>-Dvbroker.ots.currentHost</code>	The Smart Agent will find any available VisiTransact Transaction Service instance that is located on the specified host.
<code>-Dvbroker.ots.currentName</code>	The Smart Agent will find the named VisiTransact Transaction Service instance anywhere on the network.
<code>-Dvbroker.ots.currentTimeout</code>	Sets the transaction timeout value for Current. If the transaction is still alive after the timeout expires, the transaction is automatically rolled back.

For example, to start the **billing** C++ transactional server that uses the **Accounting** VisiTransact Transaction Service, you would use the following command:

```
prompt>billing -Dvbroker.ots.currentName=Accounting
```

To start the **Billing** Java transactional server that uses the **Accounting** VisiTransact Transaction Service, and has a timeout period of 2400 seconds, you would use this command:

```
prompt>vbj -Dvbroker.orb.dynamicLibs=
    com.visigenic.services.CosTransactions.TSServiceLoader
    -Dvbroker.ots.currentName=Accounting
    -Dvbroker.ots.currentTimeout=2400 Billing
```

Note

To execute Java transactional objects, you must use the `vbj` command to invoke the virtual machine. The options beginning `-Dvbroker.orb.dynamicLibs` are required to use ORB services. Be sure to use the correct capitalization of this option.

If you specify a combination of `-Dvbroker.ots.currentHost` and `-Dvbroker.ots.currentName`, the Smart Agent will find the named VisiTransact Transaction Service instance on the named host. If you specify `-Dvbroker.ots.currentFactory` with either `-Dvbroker.ots.currentHost` or `-Dvbroker.ots.currentName`, the Smart Agent will find the VisiTransact Transaction Service instance by IOR only. It ignores the other arguments.

Arguments for applications with an embedded VisiTransact Transaction Service instance

You can specify an instance of the VisiTransact Transaction Service to use with the arguments described in this section. You can also specify whether your application process will be brought down when the embedded instance of the VisiTransact Transaction Service terminates.

You pass these arguments at the command line when starting your transactional server manually. Your application handles these command-line input arguments using the `ORB_init()` method as described in “[Passing command-line arguments to ORB_init\(\) using argc and argv](#)” on page 193.

The following table explains the arguments that can be passed to `ORB_init()` from the command line for applications that embed an instance of the VisiTransact Transaction Service.

Argument to <code>ORB_init()</code>	Description
<code>-Dvbroker.ots.defaultTimeout=<seconds></code>	Sets the default transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 600 seconds.
<code>-Dvbroker.ots.defaultMaxTimeout=<seconds></code>	Sets the maximum allowed transaction timeout value for this VisiTransact Transaction Service instance. If not set, this defaults to 3600 seconds.
<code>-Dvbroker.ots.name=<transaction_service_name></code>	Sets the name of the VisiTransact Transaction Service instance used when registering its interface with the Smart Agent. The default is <code><host_name>_ots</code> .
<code>-Dvbroker.ots.logDir=<directory_name></code>	Names the directory in which logs and logger information are kept. If you do not specify, the default is <code><VBROKER_ADM>\its\<transaction_service_name>\logger</code> .
<code>-Dvbroker.ots.exitOnShutdown</code>	If set to true, this will terminate your in-process instance of the VisiTransact Transaction Service and bring down your application process as well when the VisiTransact Transaction Service is shut down remotely using vshutdown or the Console.
	If it is either not set or set to false, this will deactivate the VisiTransact Transaction Service objects registered with the Smart Agent but will NOT bring down your application process.

Error codes

This section provides information about error codes for VisiTransact Transaction Manager.

VisiTransact Transaction Manager common error codes

The following table lists common error codes for VisiTransact Transaction Manager.

Error code	Description	Possible causes	Solutions
201	Permission to access the file or directory is denied.	The process does not have the necessary permissions for accessing the file or directory.	Change the file or directory permissions to allow the process to access it.
202	The process cannot open the requested file.	The file is in the wrong directory. The process does not have permission to access the file.	Verify that the file is in the correct directory, and try again. Change the file permissions to allow the process to access it.
203	An error occurred while reading the file.	The process does not have permission to read the file.	Change the file permissions to allow the process to read the file.
204	An error occurred while writing to the file.	The process has read-only permission. It does not have permission to write to the file. The storage is full, and the system does not have enough room to write the changes to the file.	Change the file permissions to allow the process to write to the file. Clean up the storage, and then try again.
801	An error occurred while attempting to list an object of the given type.	No Location Service is available. No Smart Agent is running. The process is experiencing a communication problem.	Verify that a Location Service is available. See the VisiBroker ORB documentation for details. Start the Smart Agent using the osagent command. See the VisiBroker ORB documentation for details. Verify that all required processes are running, and all machines are up, and try again.

VisiTransact Transaction Service error codes

The following table lists the error codes for the VisiTransact Transaction Service.

Error code	Description	Possible causes	Solutions
4000	An instance of the VisiTransact Transaction Service was started successfully.	This is an informational message only.	This message requires no action.
4001	An instance of the VisiTransact Transaction Service is shutting down by request.	An administrator or other individual has shutdown the instance of the VisiTransact Transaction Service using either the vshutdown command, Ctrl+C or the kill command.	This message requires no action.
4002	The instance of the VisiTransact Transaction Service is prepared to shutdown, but is waiting for outstanding transactions to enter the completion stage before exiting.	The request to shutdown the instance of the VisiTransact Transaction Service was issued without the -immediate argument, allowing the instance to let outstanding transactions enter the completion stage before exiting.	This message requires no action. If you want to shutdown an instance of the VisiTransact Transaction Service without allowing outstanding transactions to enter the completion stage, use the -immediate argument when issuing the vshutdown command.
4003	The instance of the VisiTransact Transaction Service is shutting down without waiting for outstanding transactions to enter the completion stage.	The request to shutdown the instance of the VisiTransact Transaction Service was issued with the -immediate argument, allowing the instance to shutdown without letting outstanding transactions enter the completion stage.	This message requires no action. If you want to shutdown an instance of the VisiTransact Transaction Service and allow outstanding transactions to enter the completion stage, issue the vshutdown command without the -immediate argument.
4004	A HeuristicHazard exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision and does not know the outcome of at least one relevant update.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4005	A HeuristicCommit exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision to commit all relevant updates.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.

Error code	Description	Possible causes	Solutions
4006	A HeuristicRollback exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision to rollback all relevant updates.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4007	A HeuristicMixed exception was raised by a Resource. For complete details on this exception, see the output of the heuristic log file.	A Resource made a heuristic decision which differs from the outcome of the transaction. Some updates have been committed, others have been rolled back.	There is a possible loss of data integrity. Look up the error in the heuristic log, and notify your database administrator of the transaction identifier. Your database administrator will need to locate this error on the Resource and correct any problems manually.
4008	An exception was caught and ignored during the callback for a specific alarm (listed in the message).	This message could be thrown for various reasons, including running out of system resources.	Ignore this message.
4009	An internal application error occurred.	An internal module of VisiTransact Transaction Manager, used by several VisiTransact components, could not be initialized due to an unknown exception.	Contact VisiBroker Technical Support.
4010	An internal application error occurred, as described in the message.	An internal module of VisiTransact Transaction Manager, used by several VisiTransact components, could not be initialized due to the exception listed in the message.	Contact VisiBroker Technical Support.
4011	An exception occurred while parsing the initialization arguments listed in the message.	The wrong command-line arguments were entered when executing a VisiTransact command.	Verify the command-line arguments, and try again.
4012	An exception occurred while parsing some initialization arguments, but it is unknown which arguments were incorrect.	The wrong command-line arguments were entered when executing a VisiTransact command.	Verify the command-line arguments, and try again. See
4014	An initialization failure (specified in the message) occurred while starting an instance of the VisiTransact Transaction Service.	The wrong configuration file was used, or incorrect values were entered for initialization parameters. An internal application error has occurred.	Verify you are using the correct configuration file, and are entering correct values for the initialization parameters. Contact VisiBroker Technical Support.
4015	A runtime exception occurred within a running instance of the VisiTransact Transaction Service.	An internal application error has occurred.	Contact VisiBroker Technical Support.

Error code	Description	Possible causes	Solutions
4016	The default transaction timeout has been changed to the value of the maximum transaction timeout.	The value of the default transaction timeout was higher than the value of the maximum transaction timeout.	Verify that you have coordinated your timeout settings between your applications and any command-line arguments you are using when starting instances of the VisiTransact Transaction Service.
4017	An invalid value was provided for the default transaction timeout. The timeout value was reset to 600 seconds.	When setting the default timeout value, a zero or a negative value was provided. The default timeout value must be at least 1 second.	When setting the default timeout value, make sure to set it to a value greater than or equal to 1 second. The recommended value is 600 seconds.
4018	An unexpected exception was received by the VisiTransact Transaction Service during transaction completion. The VisiTransact Transaction Service will retry transaction completion.	An internal application error has occurred.	Contact VisiBroker Technical Support.
4019	An unexpected CORBA exception was received by the VisiTransact Transaction Service during transaction completion. The VisiTransact Transaction Service will retry transaction completion.	An internal application error has occurred.	Contact VisiBroker Technical Support.

VisiTransact transaction log error codes

The following table lists error codes for the VisiTransact transaction log.

Error code	Description	Possible causes	Solutions
8001	An internal error occurred in the logger module. See the message log for details.	See the error text in the message log.	If you cannot resolve this error from the error text displayed in the message log, contact VisiBroker Technical Support.

Native Messaging Interfaces and Classes for C++

This section describes the interfaces and classes associated with the Native Messaging.

RequestAgent

```
class NativeMessaging::RequestAgent : public virtual  
    CORBA_Object
```

The Request Agent interface defines operations of the Native Messaging Request Agent.

Include File

Include the NativeMessaging_c.hh file when you use this class.

IDL definition

```
module NativeMessaging {  
    interface RequestAgent {  
  
        exception DuplicatedRequestTag {};  
        exception PollingGroupIsEmpty {};  
        exception RequestNotExist {};  
  
        Request create_request(  
            in RequestDesc desc) raises  
(DuplicatedRequestTag);  
  
        RequestTagSeq poll(  
            in string  
            in unsigned long  
            in boolean  
            polling_group,  
            timeout,  
            unmask) raises  
(PollingGroupIsEmpty);  
  
        void destroy_request(  
            in Request req) raises  
(RequestNotExist);  
    };
```

RequestAgent Methods

create_request

```
virtual ::CORBA::Object_ptr create_request(
    const NativeMessaging::RequestDesc& _desc);
```

This method creates and returns an asynchronous method invocation request object in the Request Agent.

Parameter	Description
_desc	The RequestDesc structure containing information about the target object and async request.

The method throws DuplicatedRequestTag exception.

poll

```
virtual NativeMessaging::RequestTagSeq* poll(const
    char* _polling_group, ::CORBA::Ulong _timeout,
    ::CORBA::Boolean _unmask);
```

The method returns the sequence of request tags whose replies are ready.

Parameter	Description
_polling_group	The name of the polling group
_timeout	The timeout interval in "milliseconds" to wait if the polling group has no readily available replies. The values have following meanings: <ul style="list-style-type: none">• timeout > 0 poll will block for that much time. If after the timeout, there are still no replies available, an empty sequence of request tags is returned.• timeout=0 poll will not block. If there are any replies available, their tags will be returned to the caller. If there are no replies available, an empty sequence is returned.• timeout < 0 (or timeout=2^(32-1)) poll will block until a reply is available.
_unmask	If this flag is false, subsequent calls to poll on the same polling group will also return the request tags returned in the previous polls, until those request get destroyed either as a result of manual or automatic trash. If this flag is true, once a request tag is returned in the poll, it will not appear in subsequent polls.

This method throws PollingGroupIsEmpty exception.

destroy_request

```
virtual void destroy_request(::CORBA::Object_ptr _req);
```

This method destroys an async request.

Parameter	Description
_req	The async request object reference to be destroyed.

This method throws RequestNotExist exception.

RequestDesc

```
struct NativeMessaging::RequestDesc;
```

A descriptor structure containing all the information needed to service a async request.

Include File

Include the `NativeMessaging_c.hh` file when you use this struct.

IDL Definition

```
module NativeMessaging {
    typedef Object           Request;
    typedef sequence<octet>  OctetSeq;
    typedef OctetSeq         RequestTag;
    typedef sequence<RequestTag> RequestTagSeq;
    typedef OctetSeq         Cookie;

    struct RequestDesc {
        Object          target;
        string          repository_id;
        ReplyRecipient reply_recipient;
        Cookie         the_cookie;
        string          polling_group;
        RequestTag     request_tag;
        PropertySeq    properties;
    };
};
```

RequestDesc Fields

Field	Description
target	Reference of the target object, on which client wish to invoke an operation. CORBA::BAD_PARAM exception will result if a null value is passed.
repository_id	Repository id of the target object. If this is an empty string, request agent will try to extract the rep id from the target object reference. If rep id empty here and also null or empty in the target IOR reference, a CORBA::BAD_PARAM exception is thrown. Clients can also use a repository id of *. This acts as a wild card and is_a operation on the request object returns true for any repository id.
reply_recipient	The reference of the reply recipient (or reply handler) when using callback model. If this reference is not null then the Request Agent will call its <code>reply_available</code> method when a reply is ready.
the_cookie	A user specified sequence of octets. It will be sent to the <code>reply_recipient</code> when <code>reply_available</code> is called. The information inside the cookie is user defined.

Field	Description
polling_group	A user assigned polling group name. The group name is scoped inside the Request Agent. Group names are not uniquely used. If a non-empty group name string is assigned and the Request Agent doesn't have a polling group with the same name, a new group with that name will be implicitly created. However, if a group already exists, the created request object is inserted into that group.
request_tag	User assigned. If non-empty, it uniquely identifies the request in the group. If another request in the group has the same tag, create_request method throws DuplicatedRequestTag exception.
properties	Sequence of Property structure. Currently only one Property value is defined (see Property structure)

ReplyRecipient

```
class NativeMessaging::ReplyRecipient : public virtual
    CORBA_Object
```

Defines the interface for callback reply recipient.

Include File

Include the NativeMessaging_c.hh file when you use this class.

```
module NativeMessaging {
    interface ReplyRecipient {
        void reply_available(
            in Request reply_holder,
            in string operation,
            in Cookie the_Cookie);
    };
}
```

ReplyRecipient methods

reply_available

```
virtual void reply_available(::CORBA::Object_ptr
    _reply_holder, const char* _operation, const
    NativeMessaging::OctetSeq& _the_Cookie);
```

Parameter	Description
_reply_holder	async request for which reply is received.
_operation	operation invoked by the client.
_the_Cookie	cookie passed by the client when creating the request.

REPLY_NOT_AVAILABLE

This constant defines the CORBA::NO_RESPONSE exception minor code value thrown by the RequestAgent to the polling client when the reply for a request is not available.

Include File

Include the NativeMessaging_c.hh file when you use this constant.

IDL definition

```
module NativeMessaging {  
    const unsigned long REPLY_NOT_AVAILABLE = 100;  
};
```

Property

```
struct NativeMessaging::Property;
```

Holds a symbolic property name and its value inside an CORBA::Any.

Include File

Include the NativeMessaging_c.hh file when you use this struct.

IDL definition

```
module NativeMessaging {  
    struct Property {  
        string name;  
        any value;  
    };  
};
```

Property Fields

Field	Description
name	The name of the property. Currently only one name is recognized: RequestManualTrash
value	The value of the property. The RequestManualTrash has a value of type boolean: If set to true, the request is destroyed manually by calling destroy_request method. If set to false, the request is destroyed automatically once the reply is read (default).

PropertySeq

```
class NativeMessaging::PropertySeq : private  
    VISResource
```

A Sequence of Property that is passed inside RequestDesc while creating
async Request.

Include File

Include the NativeMessaging_c.hh file when you use this class.

OctetSeq

```
class NativeMessaging::OctetSeq : private VISResource
```

This class represents a sequence of octets. Similar to CORBA::OctetSeq
but defined here to make the NativeMessaging.idl independent of any
other IDL.

Include File

Include the NativeMessaging_c.hh file when you use this class.

RequestTag

```
typedef OctetSeq RequestTag;
```

An octet sequence identifying a request inside a polling group.

Include File

Include the NativeMessaging_c.hh file when you use this class.

RequestTagSeq

```
class NativeMessaging::RequestTagSeq : private  
    VISResource
```

Instances of this class are returned by the RequestAgent's poll method
when group polling is performed. Each element in the sequence is a
RequestTag; the octet sequence identifying a request inside the polling
group.

Include File

Include the NativeMessaging_c.hh file when you use this class.

Cookie

```
typedef OctetSeq Cookie
```

An octet sequence that is passed inside RequestDesc while creating async Request. The contents inside the Cookie are user defined. The Request Agent passes this Cookie to ReplyRecipient's `reply_available` method when callback occurs.

Include File

Include the NativeMessaging_c.hh file when you use this type.

DuplicatedRequestTag

```
class DuplicatedRequestTag : public CORBA_UserException
```

This class defines a UserException that is raised if the async request is created with a polling group name specified and there is another request in the polling group with the same request tag.

Include File

Include the NativeMessaging_c.hh file when you use this class.

PollingGroupIsEmpty

```
class PollingGroupIsEmpty : public CORBA_UserException
```

This class defines a UserException that is raised if poll method is called on the RequestAgent and:

- 1 There is no group with the specified name.
- 2 The polling group exists but contains no requests that are waiting for replies.

Include File

Include the NativeMessaging_c.hh file when you use this class.

RequestNotExist

```
class RequestNotExist : public CORBA_UserException
```

This class defines a UserException that is raised if the `destroy_request` method is called on RequestAgent and the specified request could not be found or is already destroyed.

Include File

Include the NativeMessaging_c.hh file when you use this class.

Portable Interceptor interfaces and classes for C++

This section describes the VisiBroker implementation of *Portable Interceptors* interfaces and classes as defined by the OMG Specification. For a complete description of these interfaces and classes, refer to *OMG Final Adopted Specification, ptc/2001-04-03, Portable Interceptors*.

Note

See "Using Portable Interceptors" in the *VisiBroker C++ Developer's Guide* before using these interfaces.

About Interceptors

The VisiBroker ORB provides a set of APIs known as interceptors which provide a way to plug in additional VisiBroker ORB behavior such as support for transactions and security. Interceptors are hooked into the VisiBroker ORB through which VisiBroker ORB services can intercept the normal flow of execution of the VisiBroker ORB. The following table lists the types of interceptor that VisiBroker supports.

For more information about using portable interceptors, see "Using Portable Interceptors" in the *VisiBroker C++ Developer's Guide*.

Interceptor Type	Description
Portable Interceptor	Portable Interceptors is an OMG standardized feature that allows you to write portable code for interceptors and use it with different vendor ORBs.
VisiBroker Interceptors	VisiBroker Interceptors are Micro Focus proprietary interceptors defined in VisiBroker.

For more information about using interceptors, go to "[VisiBroker Interceptor and object wrapper interfaces and classes for C++](#)", and the *VisiBroker for C++ Developer's Guide*, "Using Portable Interceptors" section for more information.

The following table lists the two types of portable interceptor.

Interceptor Type	Description
Request Interceptor	Use to enable VisiBroker ORB services to transfer context information between clients and servers. Request Interceptors are further divided into Client Request Interceptors and Server Request Interceptors.
IOR Interceptors	Use to enable a VisiBroker ORB service to add information, in an IOR, describing the server's or object's ORB service related capabilities. For example, a security service (like SSL) can add its tagged component into the IOR so that clients recognizing that component can establish the connection with the server based on the information in the component.

For more information about using portable interceptors, see "Using Portable Interceptors" in the *VisiBroker for C++ Developer's Guide*.

ClientRequestInfo

```
class PortableInterceptor::ClientRequestInfo : public  
    virtual RequestInfo
```

This class is derived from RequestInfo. It is passed to the client side interceptors point.

Some methods on ClientRequestInfo are not valid at all interception points. The following table shows the validity of each attribute or method. If an attribute is not valid, attempting to access it results in a BAD_INV_ORDER being raised with a standard minor code of 14.

	send_request	send_poll	receive_reply	receive_exception	receive_other
request_id	yes	yes	yes	yes	yes
operation	yes	yes	yes	yes	yes
arguments	yes ¹	no	yes	no	no
exception	yes	no	yes	yes	yes
contexts	yes	no	yes	yes	yes
operation_context	yes	no	yes	yes	yes
result	no	no	yes	no	no
response_expected	yes	yes	yes	yes	yes
sync_scope	yes	no	yes	yes	yes
reply_status	no	no	yes	yes	yes
forward_reference	no	no	no	no	yes ²
get_slot	yes	yes	yes	yes	yes
get_request_service_context	yes	no	yes	yes	yes
get_reply_service_context	no	no	yes	yes	yes
target	yes	yes	yes	yes	yes
effective_target	yes	yes	yes	yes	yes
effective_profile	yes	yes	yes	yes	yes
received_exception	no	no	no	yes	no
received_exception_id	no	no	no	yes	no
get_effective_component	yes	no	yes	yes	yes
get_effective_components	yes	no	yes	yes	yes
get_request_policy	yes	no	yes	yes	yes
add_request_service_context	yes	no	no	no	no

¹ When ClientRequestInfo is passed to send_request(), there is an entry in the list for every argument, whether in, inout, or out. But only the in and inout arguments will be available.

² If the reply_status() does not return LOCATION_FORWARD, accessing this attribute raises BAD_INV_ORDER with a standard minor code of 14.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ClientRequestInfo methods

```
virtual CORBA::Object_ptr target() = 0;
```

This method returns the object which the client called to perform the operation. See `effective_target()` below.

```
virtual CORBA::Object_ptr effective_target() = 0;
```

This method returns the actual object on which the operation will be invoked. If the `reply_status()` returns `LOCATION_FORWARD`, then on subsequent requests, `effective_target()` will contain the forwarded IOR, while `target` will remain unchanged.

```
virtual IOP::TaggedProfile* effective_profile() = 0;
```

This method returns the profile, in the form of `IOP::TaggedProfile`, that will be used to send the request. If a location forward has occurred for this operation's object and that object's profile changed accordingly, then this profile will be that located profile.

```
virtual CORBA::Any* received_exception() = 0;
```

This method returns the data, in the form of `CORBA::Any`, that contains the exception to be returned to the client.

If the exception is a user exception which cannot be inserted into a `CORBA::Any` (for example, it is unknown or the bindings don't provide the `TypeCode`), then this attribute will be a `CORBA::Any` containing the system exception `UNKNOWN` with a standard minor code of 1. However, the `RepositoryId` of the exception is available in the `received_exception_id` attribute.

```
virtual char* received_exception_id() = 0;
```

This method returns the ID of the `received_exception` to be returned to the client.

```
virtual IOP::TaggedComponent*  
    get_effective_component(CORBA::ULong _id) = 0;
```

This method returns the `IOP::TaggedComponent` with the given ID from the profile selected for this request.

If there is more than one component for a given component ID, it is undefined which component this operation returns. If there is more than one component for a given component ID, `get_effective_components()` will be called instead.

If no component exists for the given component ID, this operation will raise `BAD_PARAM` with a standard minor code of 28.

Parameter	Description
<code>_id</code>	ID of the component which is to be returned.

```

virtual IOP::TaggedComponentSeq*
get_effective_components(  

    CORBA::ULong _id) = 0;

```

This method returns all the tagged components with the given ID from the profile selected for this request. This sequence is in the form of an IOP::TaggedComponentSeq.

If no component exists for the given component ID, this operation will raise BAD_PARAM with a standard minor code of 28.

Parameter	Description
_id	ID of the components which are to be returned.

```

virtual CORBA::Policy_ptr
get_request_policy(CORBA::ULong _type) = 0;

```

This method returns the given policy in effect for this operation.

If the policy type is not valid, either because the specified type is not supported by this ORB or because a policy object of that type is not associated with this Object, INV_POLICY with a standard minor code of 2 is raised.

Parameter	Description
_type	Type of policy which specifies the policy to be returned.

```

virtual void add_request_service_context(  

    const IOP::ServiceContext& _service_context,  

    CORBA::Boolean _replace) = 0;

```

This method allows interceptors to add service contexts to the request.

There is no declaration of the order of the service contexts. They may or may not appear in the order in which they are added.

Parameter	Description
_service_context	IOP::ServiceContext to be added to the request.
_replace	Indicates the behavior of this method when a service context already exists with the given ID. If false, then BAD_INV_ORDER with a standard minor code of 15 is raised. If true, then the existing service context is replaced by the new one.

ClientRequestInterceptor

```

class PortableInterceptor::ClientRequestInterceptor :
    public virtual Interceptor

```

This ClientRequestInterceptor class is used to derive user-defined client side interceptor. A ClientRequestInterceptor instance is registered with the VisiBroker ORB (go to “[ORBInitializer](#)” on page 224 for more information).

Include file

Include the **PortableInterceptor_c.hh** file when you use this class.

ClientRequestInterceptor methods

```
virtual void send_request(ClientRequestInfo_ptr _ri) = 0;
```

This `send_request()` interception point allows an interceptor to query request information and modify the service context before the request is sent to the server.

This interception point may raise a system exception. If it does, no other interceptors' `send_request()` interception points are called. Those interceptors on the Flow Stack are popped and their `receive_exception()` interception points are called.

This interception point may also raise a `ForwardRequest` exception (go to ["ForwardRequest" on page 219](#) for more information). If an Interception raises this exception, no other interceptors' `send_request` methods are called. The remaining interceptors in the Flow Stack are popped and have their `receive_other()` interception point called.

Parameter	Description
_ri	ClientRequestInfo instance to be used by interceptor.

```
virtual void send_poll(ClientRequestInfo_ptr _ri) = 0;
```

This `send_poll()` interception point allows an interceptor to query information during a Time-Independent Invocation (TII) polling get reply sequence.

However, as the VisiBroker ORB does not support TII, this `send_poll()` interception point will never be called.

Parameter	Description
_ri	ClientRequestInfo instance to be used by interceptor.

```
virtual void receive_reply(ClientRequestInfo_ptr _ri) = 0;
```

This `receive_reply()` interception point allows an interceptor to query the information on a reply after it is returned from the server and before control is returned to the client.

This interception point may raise a system exception. If it does, no other interceptors' `receive_reply()` methods are called. The remaining interceptors in the Flow Stack will have their `receive_exception()` interception point called.

Parameter	Description
_ri	ClientRequestInfo instance to be used by interceptor.

```
virtual void receive_exception(ClientRequestInfo_ptr _ri) = 0;
```

This `receive_exception()` interception point is called when an exception occurs. It allows an interceptor to query the exception's information before it is raised to the client.

This interception point may raise a system exception. This has the effect of changing the exception which successive interceptors popped from the Flow

Stack receive on their calls to `receive_exception()`. The exception raised to the client will be the last exception raised by an interceptor, or the original exception if no interceptor changes the exception.

This interception point may also raise a `ForwardRequest` exception (go to “[ForwardRequest](#)” on page 219 for more information). If an interceptor raises this exception, no other interceptors’ `receive_exception()` interception points are called. The remaining interceptors in the Flow Stack are popped and have their `receive_other()` interception point called.

Parameter	Description
<code>_ri</code>	<code>ClientRequestInfo</code> instance to be used by interceptor.

```
virtual void receive_other(ClientRequestInfo_ptr _ri) = 0;
```

This `receive_other()` interception point allows an interceptor to query the information available when a request results in something other than a normal reply or an exception. For example, a request could result in a retry (for example, a GIOP Reply with a `LOCATION_FORWARD` status was received), or on asynchronous calls, the reply does not immediately follow the request, but control will return to the client and an ending interception point will be called.

For retries, depending on the policies in effect, a new request may or may not follow when a retry has been indicated. If a new request does follow, while this request is a new request, with respect to interceptors, there is one point of correlation between the original request and the retry: because control has not returned to the client, the request scoped `PortableInterceptor::Current` for both the original request and the retrying request is the same (go to “[Current](#)” on page 217 for more information).

This interception point may raise a system exception. If it does, no other interceptors’ `receive_other()` interception points are called. The remaining interceptors in the Flow Stack are popped and have their `receive_exception()` interception point called.

This interception point may also raise a `ForwardRequest` exception (go to “[ForwardRequest](#)” on page 219 for more information). If an interceptor raises this exception, successive interceptors’ `receive_other()` methods are called with the new information provided by the `ForwardRequest` exception.

Parameter	Description
<code>_ri</code>	<code>ClientRequestInfo</code> instance to be used by interceptor.

Codec

```
class IOP::Codec
```

The formats of IOR components and service context data used by ORB services are often defined as CDR encapsulations encoding instances of IDL defined data types. Codec provides a mechanism to transfer these components between their IDL data types and their CDR encapsulation representations.

A Codec is obtained from the CodecFactory. The CodecFactory is obtained through a call to
ORB::resolve_initial_references("CodecFactory").

Include file

Include the **IOP_c.hh** file when you use this class.

Codec Member Classes

```
class Codec::InvalidTypeForEncoding : public
    CORBA_UserException
```

This exception is raised by encode() or encode_value() when an invalid type is specified for the encoding.

```
class Codec::FormatMismatch : public
    CORBA_UserException
```

This exception is raised by decode() or decode_value() when the data in the octet sequence cannot be decoded into a CORBA::Any.

```
class Codec::TypeMismatch : public CORBA_UserException
```

This exception is raised by decode_value() when the given TypeCode does not match the given octet sequence.

Codec Methods

```
virtual CORBA::OctetSequence* encode(const CORBA::Any&
    _data) = 0;
```

This method converts the given data in the form of a CORBA::Any into an octet sequence based on the encoding format effective for this Codec. This octet sequence contains both the TypeCode and the data of the type.

This operation may raise InvalidTypeForEncoding.

Parameter	Description
_data	Data, in the form of a CORBA::Any, to be encoded into an octet sequence.

```
virtual CORBA::Any* decode(const CORBA::OctetSequence&
    _data) = 0;
```

This method decodes the given octet sequence into a CORBA::Any object based on the encoding format effective for this Codec.

This method raises FormatMismatch if the octet sequence cannot be decoded into a CORBA::Any.

Parameter	Description
_data	Data, in the form of an octet sequence, to be decoded into a CORBA::Any.

```
virtual CORBA::OctetSequence* encode_value(const  
CORBA::Any& _data) = 0;
```

This method converts the given CORBA::Any object into an octet sequence based on the encoding format effective for this Codec. Only the data from the CORBA::Any is encoded, not the TypeCode.

This operation may raise `InvalidTypeForEncoding`.

Parameter	Description
<code>_data</code>	Octet sequence containing the data from the encoded CORBA::Any.

```
virtual CORBA::Any* decode_value(const  
CORBA::OctetSequence& _data, CORBA::TypeCode_ptr _tc)  
= 0;
```

This method decodes the given octet sequence into a CORBA::Any based on the given TypeCode and the encoding format effective for this Codec.

This method raises `FormatMismatch` if the octet sequence cannot be decoded into a CORBA::Any.

Parameter	Description
<code>_data</code>	Data, in the form of an octet sequence, to be decoded into a CORBA::Any.
<code>_tc</code>	TypeCode to be used to decode the data.

CodecFactory

```
class IOP::CodecFactory
```

This class is used to obtain a Codec. The `CodecFactory` is obtained through a call to
`ORB::resolve_initial_references ("CodecFactory")`.

Include file

Include the `IOP_c.hh` file when you use this class.

CodecFactory Member

```
class CodecFactory::UnknownEncoding : public  
CORBA_UserException
```

This exception is raised if `CodecFactory` cannot create a Codec. See `create_codec()` function below.

CodecFactory Method

```
virtual Codec_ptr create_codec(const Encoding& _enc) =  
0;
```

This `create_codec()` method creates a Codec of the given encoding.

This method raises `UnknownEncoding` if this factory cannot create a Codec of the given encoding.

Parameter	Description
<code>_enc</code>	Specifies the encoding to be used for creating a Codec.

Current

```
class PortableInterceptor::Current: public virtual
    CORBA::Current, public virtual CORBA_Object
```

The Current class is merely a slot table, the slots of which are used by each service to transfer their context data between their context and the request's or reply's service context.

Each service which wishes to use Current reserves a slot or slots at initialization time (go to “[virtual CORBA::ULong allocate_slot_id\(\) = 0;](#)” on [page 227](#) for more information) and uses those slots during the processing of requests and replies.

Before an invocation is made, Current is obtained by way of a call to `ORB::resolve_initial_references("PICurrent")`.

From within the interception points, the data on Current that has moved from the thread scope to the request scope is available by way of the `get_slot()` method on the RequestInfo object. A Current can still be obtained by way of `resolve_initial_references()`, but that is the interceptor's thread scope Current.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

Current Methods

```
virtual CORBA::Any* get_slot(CORBA::ULong _id);
```

A service can get the slot data it sets in PICurrent by way of the `get_slot()` method. The data is in the form of a `CORBA::Any` object.

If the given slot has not been set, a `CORBA::Any` containing a type code with a `TCKind` value of `tk_null`, no value is returned.

If `get_slot()` is called on a slot that has not been allocated, `InvalidSlot` is raised.

If `get_slot()` is called from within an ORB initializer, `BAD_INV_ORDER` with a minor code of 14 is raised.

Parameter	Description
<code>_id</code>	SlotId of the slot from which the data will be returned.

```
virtual void set_slot(CORBA::ULong _id, const
    CORBA::Any& _data);
```

A service sets data in a slot with `set_slot()`. The data is in the form of a `CORBA::Any` object.

If data already exists in that slot, it is overridden.

If `set_slot()` is called on a slot that has not been allocated, `InvalidSlot` is raised.

If `set_slot()` is called from within an ORB initializer (go to “[ORBInitializer](#)” on page 224 for more information) `BAD_INV_ORDER` with a minor code of 14 is raised.

Parameter	Description
<code>_id</code>	slotId of the slot from which the data will be set.
<code>_data</code>	data, in the form of a <code>CORBA::Any</code> object, which will be set to the identified slot.

Encoding

```
struct IOP::Encoding
```

This structure defines the encoding format of a Codec. It details the encoding format, such as CDR Encapsulation encoding, and the major and minor versions of that format.

The supported encodings are:

- `ENCODING_CDR_ENCAPS`, version 1.0;
- `ENCODING_CDR_ENCAPS`, version 1.1;
- `ENCODING_CDR_ENCAPS`, version 1.2;
- `ENCODING_CDR_ENCAPS` for all future versions of GIOP as they arise.

Include file

Include the `IOP_c.hh` file when you use this struct.

Members

```
CORBA::Short format;
```

This member holds the encoding format for a Codec.

```
CORBA::Octet major_version;
```

This member holds the major version number for a Codec.

```
CORBA::Octet minor_version;
```

This member holds minor version number for a Codec.

ExceptionList

```
class Dynamic::ExceptionList
```

Use this class to hold exceptions information returned from the method `exceptions()` in the class `RequestInfo`. It is an implementation of variable-length array of type `CORBA::TypeCode`. The length of `ExceptionList` is available at run time.

For more information, go to “[virtual Dynamic::ExceptionList* exceptions\(\) = 0;](#)” on page 230.

Include file

Include the Dynamic_c.hh file when you use this class.

ForwardRequest

```
class PortableInterceptor::ForwardRequest : public  
    CORBA_UserException
```

The ForwardRequest exception is the means by which an interceptor can indicate to the ORB that a retry of the request should occur with the new object given in the exception. This behavior of causing a retry only occurs if the ORB receives a ForwardRequest from an interceptor. If ForwardRequest is raised anywhere else, it is passed through the ORB as is normal for a user exception.

If an interceptor raises a ForwardRequest exception in response to a call of an interceptor, no other interceptors are called for that interception point. The remaining interceptors in the Flow Stack will have their appropriate ending interception point called: receive_other() on the client, or send_other() on the server. The reply_status() in the receive_other() or send_other() will return LOCATION_FORWARD.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

Interceptor

```
class PortableInterceptor::Interceptor
```

This is the base class from which all interceptors are derived.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

Interceptor methods

```
virtual char* name() = 0;
```

This method returns the name of the interceptor. Each interceptor may have a name which can be used to order the lists of interceptors. Only one interceptor of a given name can be registered with the VisiBroker ORB for each interceptor type. An interceptor may be anonymous, such as it has an empty string as the name attribute. Any number of anonymous interceptors may be registered with the VisiBroker ORB.

```
virtual void destroy() = 0;
```

This method is called during ORB::destroy(). When ORB::destroy() is called by an application, the VisiBroker ORB:

- 1 waits for all requests in progress to complete
- 2 calls the Interceptor::destroy() method for each interceptor
- 3 completes destruction of the ORB

Method invocations from within `Interceptor::destroy()` on object references for objects implemented on the ORB being destroyed result in undefined behavior. However, method invocations on objects implemented on VisiBroker ORB, other than the one being destroyed, are permitted. (This means that the VisiBroker ORB being destroyed is still capable of acting as a client, but not as a server.)

IORInfo

```
class PortableInterceptor::IORInfo
```

The `IORInfo` interface provides the server side ORB service with access to the applicable policies during IOR construction and the ability to add components. The ORB passes an instance of its implementation of this interface as a parameter to `IORInterceptor::establish_components()`.

The table below defines the validity of each attribute or method in `IORInfo` in the methods defined in the `IORInterceptor`.

	<code>establish_components</code>	<code>components_established</code>
<code>get_effective_policy</code>	yes	yes
<code>add_ior_component</code>	yes	no
<code>add_ior_component_to_profile</code>	yes	no
<code>manager_id</code>	yes	yes
<code>state</code>	yes	yes
<code>adapter_template</code>	no	yes
<code>current_factory</code>	no	yes

If an illegal call is made to an attribute or method in `IORInfo`, the `BAD_INV_ORDER` system exception is raised with a standard minor code value of 14.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

IORInfo Methods

```
virtual CORBA::Policy_ptr
    get_effective_policy(CORBA::ULong _type) = 0;
```

An ORB service implementation may determine what server side policy of a particular type is in effect for an IOR being constructed by calling the `get_effective_policy()` method. When the IOR being constructed is for an object implemented using a POA, all Policy objects passed to the `PortableServer::POA::create_POA()` call that created that POA are accessible via `get_effective_policy`.

If a policy for the given type is not known to the ORB, then this method will raise `INV_POLICY` with a standard minor code of 3.

Parameter	Description
<code>_type</code>	<code>CORBA::PolicyType</code> specifying the type of policy to return.

```
virtual void add_iор_component(const
    IOP::TaggedComponent& _a_component) = 0;
```

This method is called from `establish_components()` to add a tagged component to the set which will be included when constructing IORs. The components in this set will be included in all profiles.

Any number of components may exist with the same component ID.

Parameter	Description
<code>_a_component</code>	IOP::TaggedComponent to be added.

```
virtual void add_iор_component_to_profile(const
    IOP::TaggedComponent& _a_component, CORBA::ULong
    _profile_id) = 0;
```

This method is called from `establish_components()` to add a tagged component to the set which will be included when constructing IORs. The components in this set will be included in the specified profile.

Any number of components may exist with the same component ID.

If the given profile ID does not define a known profile or it is impossible to add components to that profile, `BAD_PARAM` is raised with a standard minor code of 29.

Parameter	Description
<code>_a_component</code>	IOP::TaggedComponent to be added.
<code>_profile_id</code>	IOP::ProfileId of the profile to which this component will be added.

```
virtual CORBA::Long manager_id() = 0;
```

This method returns the attribute that provides an opaque handle to the manager of the adapter. This is used for reporting state changes in adapters managed by the same adapter manager.

```
virtual CORBA::Short state() = 0;
```

This method returns the current state of the adapter. This must be one of HOLDING, ACTIVE, DISCARDING, INACTIVE, NON_EXISTENT.

```
virtual ObjectReferenceTemplate_ptr adapter_template()
= 0;
```

This method returns the attribute that provides a means to obtain an object reference template whenever an IOR interceptor is invoked. There is no standard way to directly create an object reference template. The value of `adapter_template()` returns is the template created for the adapter policies and IOR interceptor calls to `add_component()` and `add_component_to_profile()`. The value of the `adapter_template()` returns is never changed for the lifetime of the object adapter.

```
virtual ObjectReferenceFactory_ptr current_factory() =
0;
```

This method returns the attribute that provides access to the factory that will be used by the adapter to create object references.

`current_factory()` initially has the same value as the `adapter_template` attribute, but this can be changed by setting `current_factory` to another factory. All object references created by the

object adapter must be created by calling the `make_object()` method on `current_factory`.

```
virtual void current_factory(ObjectReferenceFactory_ptr  
    _current_factory) = 0;
```

This method sets the `current_factory` attribute. The value of the `current_factory` attribute that is used by the adapter can only be set during the call to the `components_established` method.

Parameter	Description
<code>_current_factory</code>	<code>current_factory</code> object which is to be set.

IORInfoExt

```
class IORInfoExt: public PortableInterceptor::IORInfo
```

This is the VisiBroker extensions to Portable Interceptors to allow installing of a POA scoped Server Request Interceptor. This `IORInfoExt` interface is inherited from `IORInfo` interface and has additional methods to support POA scoped Server Request Interceptor.

Include file

Include the `PortableInterceptorExt_c.hh` file when you use this class.

IORInfoExt Methods

```
virtual void add_server_request_interceptor (  
    ServerRequestInterceptor_ptr _interceptor) = 0;
```

This method is used to add a POA-scoped server side request interceptor to a service.

Parameter	Description
<code>_interceptor</code>	<code>ServerRequestInterceptor</code> to be added.

```
virtual char* full_poa_name();
```

This method return the full POA name.

IORInterceptor

```
class PortableInterceptor::IORInterceptor : public  
    virtual Interceptor
```

In some cases, a portable ORB service implementation may need to add information describing the server's or object's ORB service related capabilities to object references in order to enable the ORB service implementation in the client to function properly.

This is supported through the `IORInterceptor` and `IORInfo` interfaces.

The IOR Interceptor is used to establish tagged components in the profiles within an IOR.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

IORInterceptor Methods

```
virtual void establish_components(IORInfo_ptr _info) = 0;
```

A server side ORB calls the establish_components() method on all registered IORInterceptor instances when it is assembling the list of components that will be included in the profile(s) of an object reference. This method is not necessarily called for each individual object reference. In the case of the POA, these calls are made each time POA::create_POA() is called. In other adapters, these calls would typically be made when the adapter is initialized. The adapter template is not available at this stage since information (the components) needed in the adapter template is being constructed.

Parameter	Description
_info	IORInfo instance used by the ORB service to query applicable policies and add components to be included in the generated IORs.

```
virtual void components_established(IORInfo_ptr _info) = 0;
```

After all of the establish_components() methods have been called, the components_established() methods are invoked on all registered IOR interceptors. The adapter template is available at this stage. The current_factory attribute may be get or set at this stage.

Any exception that occurs in components_established() is returned to the caller of components_established(). In the case of the POA, this causes the create_POA call to fail, and an OBJ_ADAPTER exception with a standard minor code of 6 is returned to the invoker of create_POA().

Parameter	Description
_info	IORInfo instance used by the ORB service to access applicable policies.

```
virtual void adapter_manager_state_changed(CORBA::Long _id, CORBA::Short _state) = 0;
```

Any time the state of an adapter manager changes, the adapter_manager_state_changed() method is invoked on all registered IOR interceptors.

If a state change is reported through adapter_manager_state_changed(), it is not reported through adapter_state_changed().

Parameter	Description
_id	IORInfo instance used by the ORB service to access applicable policies.
_state	new state of the object adapter.

```

virtual void adapter_state_changed(const
    ObjectReferenceTemplateSeq& _templates, CORBA::Short
    _state) = 0;

```

Object adapter state changes are reported to this method any time the state of one or more adapters changes for reasons unrelated to adapter manager state changes. The templates argument identifies the object adapters that have changed state by the template ID information. The sequence contains the adapter templates for all object adapters that have made the state transition being reported.

Parameter	Description
_templates	identifies the object adapters that have changed state by the template ID information.
_state	new state of the object adapter.

ORBInitializer

```
class PortableInterceptor::ORBInitializer
```

An interceptor is registered by registering an associated ORBInitializer object which implements the ORBInitializer class. When an ORB is initializing, it calls each registered ORBInitializer, passing it an ORBInitInfo object which is used to register its interceptor.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ORBInitializer Methods

```
virtual void pre_init(ORBInitInfo_ptr _info) = 0;
```

This method is called during ORB initialization. If it is expected that initial services registered by an interceptor will be used by other interceptors, then those initial services are registered at this point via calls to ORBInitInfo::register_initial_reference().

Parameter	Description
_info	an object that provides initialization attributes and methods by which interceptors can be registered.

```
virtual void post_init(ORBInitInfo_ptr _info) = 0;
```

This method is called during ORB initialization. If a service must resolve initial references as part of its initialization, it can assume that all initial references will be available at this point.

Calling the `post_init()` methods is not the final task of ORB initialization. The final task, following the `post_init()` calls, is attaching the lists of registered interceptors to the ORB. Therefore, the ORB does not contain the interceptors during calls to `post_init()`. If an ORB-mediated call is made from within `post_init()`, no request interceptors will be invoked on that

call. Likewise, if a method is performed which causes an IOR to be created, no IOR interceptors will be invoked.

Parameter	Description
_info	An object that provides initialization attributes and methods by which interceptors can be registered.

ORBInitInfo

```
class PortableInterceptor::ORBInitInfo
```

This ORBInitInfo class is passed to ORBInitializer object for registering interceptors.

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ORBInitInfo Member Classes

```
class DuplicateName : public CORBA_UserException;
```

Only one interceptor of a given name can be registered with the ORB for each interceptor type. If an attempt is made to register a second interceptor with the same name, DuplicateName is raised.

An interceptor may be anonymous, such as it has an empty string as the name attribute. Any number of anonymous interceptors may be registered with the ORB, so if the interceptor being registered is anonymous, the registration operation will not raise DuplicateName.

```
class InvalidName: public CORBA_UserException
```

This exception is raised by register_initial_reference() and resolve_initial_references().

register_initial_reference() raises InvalidName if:

- this method is called with an empty string id; or
- this method is called with an id that is already registered, including the default names defined by OMG.

resolve_initial_references() raises InvalidName if the name to be resolved is invalid.

ORBInitInfo Methods

```
virtual CORBA::StringSequence* arguments() = 0;
```

This method returns the arguments passed to ORB_init(). They may or may not contain the ORB's arguments.

```
virtual char* orb_id() = 0;
```

This method returns the ID of the ORB being initialized.

```
virtual IOP::CodecFactory_ptr codec_factory() = 0;
```

This method returns the IOP::CodecFactory. The CodecFactory is normally obtained via a call to ORB::resolve_initial_references("CodecFactory"), but since the ORB is not yet available and interceptors, particularly when processing service contexts, will require a Codec, a means of obtaining a Codec is necessary during ORB initialization.

```
virtual void register_initial_reference(const char* _id, CORBA::Object_ptr _obj) = 0;
```

If this method is called with an id, "Y", and an object, YY, then a subsequent call to register_initial_reference() will return object YY.

This method is identical to ORB::register_initial_reference(). This same functionality exists here because the ORB, not yet fully initialized, is not yet available but initial references may need to be registered as part of Interceptor registration. The only difference is that the version of this method on the ORB uses PIDL (CORBA::ORB::ObjectId and CORBA::ORB::InvalidName) whereas the version in this interface uses IDL defined in this interface; the semantics are identical.

`register_initial_reference()` raises `InvalidName` if:

- this method is called with an empty string id; or
- this method is called with an id that is already registered, including the default names defined by OMG.

Parameter	Description
_id	ID by which the initial reference will be known.
_obj	The initial reference itself.

```
virtual CORBA::Object_ptr
    resolve_initial_references(const char* _id) = 0;
```

This method is only valid during `post_init()`. It is identical to ORB::resolve_initial_references(). This same functionality exists here because the ORB, not yet fully initialized, is not yet available but initial references may be required from the ORB as part of Interceptor registration.

Parameter	Description
_id	ID by which the initial reference will be known.

If the name to be resolved is invalid, `resolve_initial_references()` will raise `InvalidName`.

```
virtual void
    add_client_request_interceptor(ClientRequestIntercept
        or_ptr _interceptor) = 0;
```

This method is used to add a client side request interceptor to the list of client side request interceptors.

If a client side request interceptor has already been registered with this interceptor's name, DuplicateName will be raised.

Parameter	Description
_interceptor	ClientRequestInterceptor to be added.

```
virtual void add_server_request_interceptor(  
    ServerRequestInterceptor_ptr _interceptor) = 0;
```

This method is used to add a server side request interceptor to the list of server side request interceptors.

If a server side request interceptor has already been registered with this interceptor's name, DuplicateName is raised.

Parameter	Description
_interceptor	ServerRequestInterceptor to be added.

```
virtual void add_iор_interceptor(IORInterceptor_ptr  
    _interceptor) = 0;
```

This method is used to add an IOR interceptor to the list of IOR interceptors.

If an IOR interceptor has already been registered with this interceptor's name, DuplicateName is raised.

Parameter	Description
_interceptor	IORInterceptor to be added.

```
virtual CORBA::ULong allocate_slot_id() = 0;
```

returns the index to the slot which has been allocated.

A service calls allocate_slot_id to allocate a slot on PortableInterceptor::Current.

Note

While slot id's can be allocated within an ORB initializer, the slots themselves cannot be initialized. Calling set_slot() or get_slot() on the Current within an ORB initializer will raise a BAD_INV_ORDER with a minor code of 14.

```
virtual void register_policy_factory(CORBA::ULong  
    _type, PolicyFactory_ptr _policy_factory) = 0;
```

This method registers a PolicyFactory for the given PolicyType.

If a PolicyFactory already exists for the given PolicyType, BAD_INV_ORDER is raised with a standard minor code of 16.

Parameter	Description
_type	CORBA::PolicyType that the given PolicyFactory serves.
_policy_factory	factory for the given CORBA::PolicyType.

Parameter

```
struct Dynamic::Parameter
```

This structure holds the parameter information. This structure is the element used in `ParameterList` (go to “[ParameterList](#)” on page 228 for more information).

Include file

Include the `Dynamic_c.hh` file when you use this struct.

Members

```
CORBA::Any argument;
```

This member stores the parameter data in the form of `CORBA::Any`.

```
CORBA::ParameterMode mode;
```

This member specifies the mode of a parameter. Its value can be one of the enum values: `PARAM_IN`, `PARAM_OUT` or `PARAM_INOUT`.

ParameterList

```
class Dynamic::ParameterList
```

This class is used to pass parameters information returned from the method `arguments()` in the class `RequestInfo`. It is an implementation of variable-length array of type `Parameter`. The length of `ParameterList` is available at run-time.

For more information, go to “[virtual Dynamic::ParameterList* arguments\(\) = 0;](#)” on [page 230](#).

Include file

Include the `Dynamic_c.hh` file when you use this class.

PolicyFactory

```
class PortableInterface::PolicyFactory
```

A portable ORB service implementation registers an instance of the `PolicyFactory` interface during ORB initialization. The POA is required to preserve any policy which is registered with `ORBInitInfo` in this manner.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

PolicyFactory Method

```
virtual CORBA::Policy_ptr create_policy(CORBA::ULong  
    _type, const CORBA::Any& _value) = 0;
```

The ORB calls `create_policy()` on a registered PolicyFactory instance when `CORBA::ORB::create_policy()` is called for the PolicyType under which the PolicyFactory has been registered. The `create_policy()` method then returns an instance of the appropriate interface derived from `CORBA::Policy` whose value corresponds to the specified `CORBA::Any`. If it cannot, it will raise an exception as described for `CORBA::ORB::create_policy()`.

Parameter	Description
<code>_type</code>	A <code>CORBA::PolicyType</code> specifying the type of policy being created.
<code>_value</code>	An <code>CORBA::Any</code> containing data with which to construct the <code>CORBA::Policy</code> .

RequestInfo

```
class PortableInterceptor::RequestInfo
```

This is the base class from which `ClientRequestInfo` and `ServerRequestInfo` are derived. Each interception point is given an object through which the Interceptor can access request information. client side and server side interception points are concerned with different information, so there are two information objects: `ClientRequestInfo` is passed to the client side interception points and `ServerRequestInfo` is passed to the server side interception points. But there is information that is common to both, so they both inherit from this common interface: `RequestInfo`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

RequestInfo methods

```
virtual CORBA::ULong request_id() = 0;
```

This method returns the ID which uniquely identifies an active request / reply sequence. Once a request / reply sequence is concluded this ID may be reused.

Note

This ID is not the same as the GIOP `request_id`. If GIOP is the transport mechanism used, then these IDs may very well be the same, but this is not guaranteed nor required.

```
virtual char* operation() = 0;
```

This method returns name of the operation being invoked.

```
virtual Dynamic::ParameterList* arguments() = 0;
```

This method returns a Dynamic::ParameterList containing the arguments on the operation being invoked. If there are no arguments, this attribute will be a zero length sequence.

```
virtual Dynamic::ExceptionList* exceptions() = 0;
```

This method returns a Dynamic::ExceptionList describing the TypeCodes of the user exceptions that this operation invocation may raise. If there are no user exceptions, this attribute will be a zero length sequence.

```
virtual CORBA::StringSequence* contexts() = 0;
```

This method returns a CORBA::StringSequence describing the contexts that may be passed on this operation invocation. If there are no contexts, this attribute will be a zero length sequence.

```
virtual CORBA::StringSequence* operation_context() = 0;
```

This method returns a CORBA::StringSequence containing the contexts being sent on the request.

```
virtual CORBA::Any* result() = 0;
```

This method returns the data, in the form of CORBA::Any, that contains the result of the operation invocation. If the operation return type is void, this attribute will be a CORBA::Any containing a type code with a TCKind value of tk_void and no value.

```
virtual CORBA::Boolean response_expected() = 0;
```

This method returns a boolean value which indicates whether a response is expected.

On the client, a reply is not returned when `response_expected()` is false, so `receive_reply()` cannot be called. `receive_other()` is called unless an exception occurs, in which case `receive_exception()` is called.

```
virtual CORBA::Short sync_scope() = 0;
```

This method returns an attribute, defined in the Messaging specification, is pertinent only when `response_expected()` is false. If `response_expected()` is true, the value of `sync_scope()` is undefined. It defines how far the request will progress before control is returned to the client. This attribute may have one of the following values:

- Messaging::SYNC_NONE
- Messaging::SYNC_WITH_TRANSPORT
- Messaging::SYNC_WITH_SERVER
- Messaging::SYNC_WITH_TARGET

On the server, for all scopes a reply will be created from the return of the target operation call, but the reply will not return to the client. Although it does not return to the client, it does occur, so the normal server side interception points are followed (for example, `receive_request_service_contexts()`, `receive_request()`, `send_reply()` or `send_exception()`).

For `SYNC_WITH_SERVER` and `SYNC_WITH_TARGET`, the server does send an empty reply back to the client before the target is invoked. This reply is not intercepted by server side Interceptors.

```
virtual CORBA::Short reply_status() = 0;
```

This method returns an attribute which describes the state of the result of the operation invocation. Its value can be one of the following:

- PortableInterceptor::SUCCESSFUL = 0
- PortableInterceptor::SYSTEM_EXCEPTION = 1
- PortableInterceptor::USER_EXCEPTION = 2
- PortableInterceptor::LOCATION_FORWARD = 3
- PortableInterceptor::TRANSPORT_RETRY = 4

On the client:

- Within the `receive_reply` interception point, this attribute will only be SUCCESSFUL.
- Within the `receive_exception` interception point, this attribute will be either SYSTEM_EXCEPTION or USER_EXCEPTION.
- Within the `receive_other` interception point, this attribute will be any of: SUCCESSFUL, LOCATION_FORWARD, or TRANSPORT_RETRY.
SUCCESSFUL means an asynchronous request returned successfully.
LOCATION_FORWARD means that a reply came back with
LOCATION_FORWARD as its status. TRANSPORT_RETRY means that the transport mechanism indicated a retry - a GIOP reply with a status of NEEDS_ADDRESSING_MODE, for instance.

On the server:

- Within the `send_reply` interception point, this attribute will only be SUCCESSFUL.
- Within the `send_exception` interception point, this attribute will be either SYSTEM_EXCEPTION or USER_EXCEPTION.
- Within the `send_other` interception point, this attribute will be any of: SUCCESSFUL, or LOCATION_FORWARD. SUCCESSFUL means an asynchronous request returned successfully. LOCATION_FORWARD means that a reply came back with LOCATION_FORWARD as its status.

```
virtual CORBA::Object_ptr forward_reference() = 0;
```

If the `reply_status()` returns LOCATION_FORWARD, then this method returns an object to which the request will be forwarded. It is indeterminate whether a forwarded request will actually occur.

```
virtual CORBA::Any* get_slot(CORBA::ULong _id) = 0;
```

This method returns the data, in the form of a CORBA::Any, from the given slot of the PortableInterceptor::Current that is in the scope of the request.

If the given slot has not been set, then a CORBA::Any containing a type code with a TCKind value of tk_null is returned.

If the ID does not define an allocated slot, InvalidSlot is raised.

Go to “[Current](#)” on page 217 for an explanation of slots and the PortableInterceptor::Current.

Parameter	Description
<code>_id</code>	SlotId of the slot which is to be returned.

```

virtual IOP::ServiceContext*
get_request_service_context(CORBA::ULong _id) = 0;

```

This method returns a copy of the service context with the given ID that is associated with the request.

If the request's service context does not contain an entry for that ID, BAD_PARAM with a standard minor code of 26 is raised.

Parameter	Description
_id	IOP::ServiceContext of the slot which is to be returned.

```

virtual IOP::ServiceContext*
get_reply_service_context(CORBA::ULong _id) = 0;

```

This method returns a copy of the service context with the given ID that is associated with the reply.

If the request's service context does not contain an entry for that ID, BAD_PARAM with a standard minor code of 26 is raised.

Parameter	Description
_id	IOP::ServiceContext of the slot which is to be returned.

ServerRequestInfo

```

class PortableInterceptor::ServerRequestInfo : public
    virtual RequestInfo

```

This class is derived from RequestInfo. It is passed to server side interception points.

Some methods on ServerRequestInfo are not valid at all interception points. The table below shows the validity of each attribute or method. If it is not valid, attempting to access it will result in a BAD_INV_ORDER being raised with a standard minor code of 14.

	receive_request_service_contexts	receive_request	send_reply	send_exception	send_other
request_id	yes	yes	yes	yes	yes
operation	yes	yes	yes	yes	yes
arguments	no	yes ¹	yes	no ²	no ²
exceptions	no	yes	yes	yes	yes
contexts	no	yes	yes	yes	yes
operation_context	no	yes	yes	no	no
result	no	no	yes	no	no
response_expected	yes	yes	yes	yes	yes
sync_scope	yes	yes	yes	yes	yes
reply_status	no	no	yes	yes	yes
forward_reference	no	no	no	no	yes ²
get_slot	yes	yes	yes	yes	yes
get_request_service_context	yes	yes	yes	yes	yes
get_reply_service_context	no	no	yes	yes	yes

	receive_request_service_contexts	receive_request	send_reply	send_exception	send_other
sending_exception	no	no	no	yes	no
object_id	no	yes	yes	yes ³	yes ³
adapter_id	no	yes	yes	yes ³	yes ³
server_id	no	yes	yes	yes	yes
orb_id	no	yes	yes	yes	yes
adapter_name	no	yes	yes	yes	yes
target_most_derived_interface	no	yes	no ⁴	no ⁴	no ⁴
get_server_policy	yes	yes	yes	yes	yes
set_slot	yes	yes	yes	yes	yes
target_is_a	no	yes	no ⁴	no ⁴	no ⁴
add_reply_service_context	yes	yes	yes	yes	

¹When `ServerRequestInfo` is passed to `receive_request()`, there is an entry in the list for every argument, whether in, inout, or out. But only the in and inout arguments will be available.

²If the `reply_status()` does not returns `LOCATION_FORWARD`, accessing this attribute will raise `BAD_INV_ORDER` with a standard minor code of 14.

³If the servant locator caused a location forward, or raised an exception, this attribute / method may not be available in this interception point. `NO_RESOURCES` with a standard minor code of 1 will be raised if it is not available.

⁴The method is not available in this interception point because the necessary information requires access to the target object's servant, which may no longer be available to the ORB. For example, if the object's adapter is a POA that uses a ServantLocator, then the ORB invokes the interception point after it calls `ServantLocator::postinvoke()`.

Include file

Include the `PortableInterceptor_c.hh` file when you use this class.

ServerRequestInfo methods

```
virtual CORBA::Any* sending_exception() = 0;
```

This method returns data, in the form `CORBA::Any`, that contains the exception to be returned to the client.

If the exception is a user exception which cannot be inserted into a `CORBA::Any` (e.g., it is unknown or the bindings don't provide the `TypeCode`), then this attribute will be an `CORBA::Any` containing the system exception `UNKNOWN` with a standard minor code of 1.

```
virtual char* server_id() = 0;
```

This method returns the value that was passed into the `ORB::init` call using the `-ORBServerId` argument when the ORB was created.

```
virtual char* orb_id() = 0;
```

The method returns the value that was passed into the ORB::init() call.

In Java, this is accomplished using the -ORBid argument in the ORB.init call that created the ORB containing the object adapter that created this template. What happens if the same ORBId is used on multiple ORB::init() calls in the same server is currently undefined.

```
virtual CORBA::StringSequence* adapter_name() = 0;
```

The method returns the name for the object adapter, in the form of CORBA::StringSequence, that services requests for the invoked object. In the case of the POA, the adapter_name is the sequence of names from the root POA to the POA that services the request. The root POA is not named in this sequence.

```
virtual CORBA::OctetSequence* object_id() = 0;
```

This method returns the opaque object_id, in the form of CORBA::OctetSequence, that describes the target of the operation invocation.

```
virtual CORBA::OctetSequence* adapter_id() = 0;
```

This method returns opaque identifier for the object adapter, in the form of CORBA::OctetSequence.

```
virtual char* target_most_derived_interface() = 0;
```

This method returns the RepositoryID for the most derived interface of the servant.

```
virtual CORBA::Policy_ptr  
    get_server_policy(CORBA::ULong _type) = 0;
```

This method returns the policy in effect for this operation for the given policy type. The returned CORBA::Policy object will only be a policy whose type was registered via register_policy_factory().

If a policy for the given type was not registered via register_policy_factory, this method will raise INV_POLICY with a standard minor code of 3.

Parameter	Description
<code>_type</code>	The CORBA::PolicyType which specifies the policy to be returned.

```
virtual void set_slot(CORBA::ULong _id, const  
    CORBA::Any& _data) = 0;
```

This method allows an Interceptor to set a slot in the PortableInterceptor::Current that is in the scope of the request. If data already exists in that slot, it will be overwritten.

If the ID does not define an allocated slot, InvalidSlot is raised.

Go to “[Current](#) on page 217” for an explanation of slots and PortableInterceptor::Current.

Parameter	Description
<code>_id</code>	The SlotId of the slot.
<code>_data</code>	The data, in the form of a CORBA::Any, to store in that slot.

```
virtual CORBA::Boolean target_is_a(const char* _id) =  
    0;
```

This method returns true if the servant is the given RepositoryId, false if it is not.

Parameter	Description
_id	The caller wants to know if the servant is this CORBA::RepositoryId.

```
virtual void add_reply_service_context(const  
    IOP::ServiceContext& _service_context, CORBA::Boolean  
    _replace) = 0;
```

This method allows Interceptors to add service contexts to the request.

There is no declaration of the order of the service contexts. They may or may not appear in the order that they are added.

Parameter	Description
_service_context	The IOP::ServiceContext to add to the reply.
_replace	Indicates the behavior of this method when a service context already exists with the given ID. If false, then BAD_INV_ORDER with a standard minor code of 15 is raised. If true, then the existing service context is replaced by the new one.

ServerRequestInterceptor

```
class PortableInterceptor::ServerRequestInterceptor :  
    public virtual Interceptor
```

This ServerRequestInterceptor class is used to derive user-defined server side interceptor. A ServerRequestInterceptor instance is registered with the ORB (go to “[ORBInitializer](#)” on page 224 for more information).

Include file

Include the PortableInterceptor_c.hh file when you use this class.

ServerRequestInterceptor methods

```
virtual void receive_request_service_contexts(  
    ServerRequestInfo_ptr _ri) = 0;
```

At this receive_request_service_contexts() interception point, Interceptors must get their service context information from the incoming request and transfer it to PortableInterceptor::Current's slots.

This interception point is called before the servant manager is called. Operation parameters are not yet available at this point. This interception point may or may not execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' receive_request_service_contexts() interception points are called. Those Interceptors on the Flow Stack are popped and their send_exception() interception points are called.

This interception point may also raise a ForwardRequest exception (go to ["ForwardRequest" on page 219](#) for more information). If an Interceptor raises this exception, no other Interceptors' `receive_request_service_contexts()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_other` interception points are called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void receive_request(ServerRequestInfo_ptr _ri) = 0;
```

This `receive_request()` interception point allows an Interceptor to query request information after all the information, including method parameters, are available. This interception point will execute in the same thread as the target invocation.

In the DSI model, since the parameters are first available when the user code calls `arguments()`, `receive_request()` is called from within `arguments()`. It is possible that `arguments()` is not called in the DSI model. The target may call `set_exception()` before calling `arguments()`. The ORB will guarantee that `receive_request()` is called once, either through `arguments()` or through `set_exception()`. If it is called through `set_exception()`, requesting the `arguments()` will result in `NO_RESOURCES` being raised with a standard minor code of 1.

This interception point may raise a system exception. If it does, no other Interceptors' `receive_request()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_exception` interception points are called.

This interception point may also raise a ForwardRequest exception (go to ["ForwardRequest" on page 219](#) for more information). If an Interceptor raises this exception, no other Interceptors' `receive_request()` methods are called. Those Interceptors on the Flow Stack are popped and their `send_other()` interception points are called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void send_reply(ServerRequestInfo_ptr _ri) = 0;
```

This `send_reply()` interception point allows an Interceptor to query reply information and modify the reply service context after the target operation has been invoked and before the reply is returned to the client. This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' `send_reply()` interception points are called. The remaining Interceptors in the Flow Stack will have their `send_exception()` interception point called.

Parameter	Description
<code>_ri</code>	This is the <code>ServerRequestInfo</code> instance to be used by Interceptor.

```
virtual void send_exception(ServerRequestInfo_ptr _ri)  
= 0;
```

This `send_exception()` interception point is called when an exception occurs. It allows an Interceptor to query the exception information and modify the reply service context before the exception is raised to the client. This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. This has the effect of changing the exception which successive Interceptors popped from the Flow Stack receive on their calls to `send_exception`. The exception raised to the client will be the last exception raised by an Interceptor, or the original exception if no Interceptor changes the exception.

This interception point may also raise a `ForwardRequest` exception (go to ["ForwardRequest" on page 219](#) for more information). If an Interceptor raises this exception, no other Interceptors' `send_exception()` interception points are called. The remaining Interceptors in the Flow Stack will have their `send_other` interception points called.

```
virtual void send_other(ServerRequestInfo_ptr _ri) = 0;
```

This `send_other()` interception point allows an Interceptor to query the information available when a request results in something other than a normal reply or an exception. For example, a request could result in a retry (e.g., a GIOP Reply with a `LOCATION_FORWARD` status was received). This interception point will execute in the same thread as the target invocation.

This interception point may raise a system exception. If it does, no other Interceptors' `send_other()` methods are called. The remaining Interceptors in the Flow Stack will have their `send_exception` interception points called.

This interception point may also raise a `ForwardRequest` exception.

VisiBroker Interceptor and object wrapper interfaces and classes for C++

This section describes the interfaces and classes that you can use with *VisiBroker interceptors* and *object wrappers*.

For more information, see “Using VisiBroker Interceptors” and “Using Object Wrappers” in the *VisiBroker for C++ Developer’s Guide*.

Introduction

Similar to Portable Interceptors, VisiBroker interceptors offer the VisiBroker ORB services a mechanism to intercept normal flow of execution of the ORB. The table below lists the three forms of VisiBroker interceptor.

Interceptor Type	Description
Client Interceptor	System level interceptors which can be used to hook ORB services such as transactions and security into the client ORB processing.
Server Interceptor	System level interceptors which can be used to hook ORB services such as transactions and security into the server ORB processing.
Object Wrappers	User level interceptors which provide a simple mechanism for users to intercept calls to stubs and skeletons. These allow for simple tracing and data caching among other things.

InterceptorManagers

Interceptors are installed and managed via interceptor managers. The `InterceptorManager` interface is the generic interceptor manager from which all interceptor-specific managers inherit. An `InterceptorManager` type is associated with each interceptor type. An `InterceptorManager` holds a list or chain of a particular kind of interceptors, all of which have the same scope and need to start at the same time. Therefore, global interceptors, such as `POALifeCycle` and `Bind` have global `InterceptorManagers` while scoped interceptors, per-POA and per-object, have an `InterceptorManager` for each scope. Each scope, either global, POAs, or objects, may hold multiple types of interceptors. You get the right kind of manager for a particular interceptor from an `InterceptorManagerControl`.

Global interceptors may be handed additional interceptor managers to install localized interceptors, for example, per-POA interceptors use the `POAInterceptorManager`.

To obtain an instance of the global interceptor manager, `InterceptorManager`, call `ORB.resolve_initial_references` and pass the `String InterceptorManager` as an argument. This value is only available when the ORB is in administrative mode, that is, during ORB initialization. It can only be used to install global interceptors such as, `POALifeCycle` interceptors or `Bind` interceptors.

The POA interceptor manager is a per-POA manager and is only available to POALifeCycleInterceptors during their create call. POALifeCycleInterceptors may set up all other server side interceptors during the call to create. The Bind Interceptor Manager is a per-object manager and is only available to Bind interceptors during their bind_succeeded() call. Bind interceptors may set up ClientRequest interceptors during the bind_succeeded call.

IOR templates

In addition to the interceptor, the Interoperable Object Reference (IOR) template may be modified directly on the POAInterceptorManager interface during the call to POALifeCycleInterceptor::create(). The IOR template is a full IOR value with the type_id not set, and all GIOP::ProfileBodyValues have incomplete object keys. The POA sets the type_id and fills in the object keys of the template before calling the IORCreationInterceptors.

InterceptorManager

```
class Interceptor::InterceptorManager
```

This is the base class from which all interceptor managers are derived. Interceptor managers are interfaces which are used to manage the installation and removal of interceptors from the system.

InterceptorManagerControl

```
class Interceptor::InterceptorManagerControl public
    CORBA::PseudoObject
```

This is the class that is responsible for controlling a set of related interceptor managers. It holds all available managers identified by a string that corresponds to the type of interceptors to be managed. There is one InterceptorManagerControl per scope.

Include file

Include the interceptor_c.hh file when you use this class.

InterceptorManager::Interceptor method

```
InterceptorManager_ptr get_manager(const char name);
```

This method returns an instance of the InterceptorManager which returns a string identifying the manager.

Parameter	Description
name	The name of the interceptor.

BindInterceptor

```
class Interceptor::BindInterceptor public
    VISPpseudoInterface
```

You can use this class to derive your own interceptor for handling bind and rebind events for a client or server application. The Bind Interceptors are global interceptors invoked on the client side before and after binds.

If an exception is thrown during a bind, the remaining interceptors in the chain are not called and the chain is truncated to only those interceptors already called. Exceptions thrown during `bind_succeeded` or `bind_failed` are ignored.

Include file

You should include the `interceptor_c.hh` file when you use this class.

BindInterceptor methods

```
virtual IOP::IORValue_ptr bind(IOP::IORValue_ptr ior,
    CORBA::Object_ptr obj, CORBA::Boolean rebind,
    VISClosure& closure);
```

This method is called during all ORB bind operations.

Parameter	Description
ior	The Interoperable Object Reference (IOR) for the server object to which the client is binding.
obj	The client object which is being bound to the server. The object will not be properly initialized at this time, so do not attempt an operation on it. However, it may be stored in a data structure and used after the bind has completed.
rebind	An attempt to rebind to the server. After a <code>bind()</code> has failed, depending on the current quality of service, a rebind may be attempted.
closure	A new closure object for the bind operation. The closure will be used in corresponding calls to either <code>bind_failure</code> or <code>bind_succeeded</code> .
return	Returns a new IOR, if the bind operation is to be continued using this new IOR. Otherwise, it returns a null value and the bind will proceed using the original IOR.
	Returning the same IOR as the parameter passed in is incorrect and generates an exception at bind time.

```
virtual IOP::IORValue_ptr bind_failed(IOP::IORValue_ptr
    ior, CORBA::Object_ptr obj, VISClosure& closure);
```

This method is called if a bind operation failed.

Parameter	Description
ior	The IOR of the server object on which the bind operation failed.
obj	The client object which is being bound to the server.

Parameter	Description
closure	The closure object previously given in the bind call.
return	Returns a new IOR if a rebinding is to be attempted against this IOR. Otherwise, it returns null, and a rebinding is not attempted.

```
virtual void bind_succeeded(IOP::IORValue_ptr ior,
CORBA::Object_ptr obj, CORBA::Long profileIndex,
InterceptorManagerControl_ptr interceptorControl,
VISClosure& closure);
```

This method is called if a bind operation succeeded.

Parameter	Description
ior	The IOR of the server object on which the bind operation succeeded.
obj	The client object which is being bound to the server.
profileIndex	Identifies the connection protocol.
interceptorControl	This Manager provides a list of the types of Managers.
closure	The closure object previously given in the bind call.

BindInterceptorManager

```
class Interceptor::BindInterceptorManager public
    InterceptorManager, public VISPseudoInterface
```

This is the class that manages all the global bind interceptors. It only has one public method, which allows you to register interceptors.

The BindInterceptorManager must always be used at ORB_init(). It has no effect after the orb is initialized. Therefore, it only needs to be used in the context of a loader class that inherits from VISinit.

To obtain a BindInterceptorManager from the InterceptorManagerControl, use InterceptorManagerControl::get_manager() with the identification string Bind.

Include file

You should include the `interceptor_c.hh` file when you use this class.

BindInterceptorManager method

```
void add (BindInterceptor _ptr interceptor)
```

This method is used to add a BindInterceptor to the list of interceptors to be started at bind time.

ClientRequestInterceptor

```
class Interceptor::ClientRequestInterceptor public
    VISPpseudoInterface
```

You use this class to derive your own client side interceptor. The Client Request interceptors may be installed during the bind_succeeded call of a bind interceptor and remain active for the duration of the connection. The methods defined in your derived class will be invoked by the ORB during the preparation or sending of an operation request, during the receipt of a reply message, or if an exception is raised.

Include file

Include the `interceptor_c.hh` file when you use this class.

ClientRequestInterceptor methods

```
virtual void preinvoke_premarshal (CORBA::Object_ptr
    target, const char* operation,
    IOP::ServiceContextList& service_contexts,
    VisClosure& closure);
```

This method is invoked by the ORB on every request, before the request has been marshaled. An exception thrown from this interceptor results in the request being completed immediately. In this case, the chain is shortened to only those interceptors that have already fired, the request will not be sent, and `exception_occurred()` is called on all interceptors still in the chain.

Parameter	Description
target	The client object which is being bound to the server.
operation	The name of the operation being invoked.
service_context	The services assigned by the ORB. These services are identified by a tag registered with the OMG.
closure	The closure object previously given in the bind call.

```
virtual void preinvoke_postmarshal (CORBA::Object_ptr
    target, CORBA_MarshallOutBuffet& payload, VISClosure&
    closure);
```

This method is invoked after every request has been marshaled, but before it was sent.

If an exception is thrown in this method:

- the rest of the chain is not invoked,
- the request is not sent to the server, and
- `exception_occurred()` is called on the whole interceptor chain.

Parameter	Description
target	The client object which is being bound to the server.
payload	Marshalled buffer.
closure	The closure object previously given in the bind call.

```

virtual void postinvoke(CORBA::Object_ptr target,
    const IOP::ServiceContextList& Service_contexts,
    CORBA_MarshallInBuffet& payload,
    CORBA::Environment_ptr env, VISClosure& closure);

```

This method is invoked after a request completes correctly or by throwing an exception. It is called after the ServantLocator has been invoked. Should an interceptor in the chain throw an exception, that interceptor also calls exceptionoccurred() and all remaining interceptors in the chain call exception() instead of calling postinvoke().

The CORBA::Environment parameter is changed to reflect this exception, even when a two-way call had already written an exception in that argument.

Parameter	Description
target	The client object which is being bound to the server.
service_context	The client object which is being bound to the server. Service context length is 0 for one-way calls and during exception.
payload	Marshalled buffer.
env	Contains information on the exception that was raised.
closure	The closure object previously given in the bind call.

```

virtual void exception_occurred(CORBA::Object_ptr
    target, CORBA::Environment_ptr env, VISClosure&
    closure);

```

This method is invoked by the ORB when an exception is thrown before the invocation. All exceptions thrown after the invocation are gathered in the environment parameter of the postinvoke method.

Parameter	Description
target	The client object which is being bound to the server.
env	Contains information on the exception that was raised.
closure	The closure object previously given in the bind call.

ClientRequestInterceptorManager

```

class Interceptor::ClientRequestInterceptorManager :
    public InterceptorManager, public VISPpseudoInterface

```

This is the class that holds the chain of ClientRequestInterceptors for the current object.

A ClientRequestInterceptorManager should be used inside of the BindInterceptor::bind_succeeded() method within the scope set by the InterceptorManagerControl passed as an argument to bind_succeeded().

Include file

Include the `interceptor_c.hh` when you use this class.

ClientRequestInterceptorManager methods

```
virtual void add (ClientRequestInterceptor_ptr  
interceptor) ;
```

This method may be invoked to add a ClientRequestInterceptor to the local chain.

```
virtual void remove (ClientRequestInterceptor_ptr  
interceptor) ;
```

This method removes a ClientRequestInterceptorManager.

POALifeCycle Interceptor

```
class InterceptorManager::POALifeCycleInterceptor  
public VISPpseudoInterface
```

The POALifeCycleInterceptor is a global interceptor which is invoked every time a POA is created or destroyed. All other server side interceptors may be installed either as global interceptors or for specific POAs. You install the POALifeCycleInterceptor through the POALifeCycleInterceptorManager interface. Go to [“POALifeCycleInterceptorManager” on page 246](#) for more information. The POALifeCycleInterceptor is called during POA creation and destruction.

Include file

Include the PortableServerExt_c.hh file when you use this class.

POALifeCycleInterceptor methods

```
virtual void create(PortableServer::POA_ptr poa,  
CORBA::PolicyList& policies IOP::IORValue*&  
iorTemplate,  
interceptor::InterceptorManagerControl_ptr poaAdmin) ;
```

This method is invoked when a new POA is created either explicitly through a call to `create_POA` or via `AdapterActivator`. With `AdapterActivator`, the interceptor is called only after the `unknown_adapter` method successfully returns from the `AdapterActivator`. The `create` method is passed as a reference to the recently created POA and as a reference to that POA instance's `POAInterceptorManager`.

Parameter	Description
poa	The ID associated with the current POA being created.
policies	The policies for the POA being created.
iorTemplate	The IOR template is a full IOR value with the type_id not set, and all GIOP::ProfileBodyValues will have incomplete object keys.
poaAdmin	The control for the POA being created. Go to “InterceptorManagerControl” on page 240 for more information.

```
virtual void destroy(PortalServer::POA_ptr poa);
```

This method is called before a POA is destroyed and all of its objects have been etherealized. It guarantees that `destroy` will be called on all interceptors before `create` will be called again for a POA with the same name. If the `destroy` operation throws a system exception, the exception is ignored, and the remaining interceptors are called.

Parameter	Description
poa	Portable Object Adapter (POA) being destroyed.

POALifeCycleInterceptorManager

```
class InterceptorExt::POALifeCycleInterceptorManager
public interceptor::InterceptorManager, public
VISPpseudoInterface
```

This class manages all `POALifeCycle` global interceptors. There is a single instance of the `POALifeCycleInterceptorManager` defined in an ORB.

Then scope of this interface is global, per-ORB. This class is only active during `ORB_init()` time.

Include file

Include the `PortalServerExt_c.hh` file when you use this class.

POALifeCycleInterceptorManager method

```
virtual void add(POALifeCycleInterceptor_ptr
interceptor);
```

This method may be invoked to add a `POALifeCycleInterceptor` to the global chain of `POALifeCycle` interceptors.

Parameter	Description
interceptor	The interceptor to be added.

ActiveObjectLifeCycleInterceptor

```
class
PortableServerExt::ActiveObjectLifeCycleInterceptor
public VISPpseudoInterface
```

The `ActiveObjectLifeCycleInterceptor` interceptor is called when objects are added and removed from the active object map. Only used when POA has RETAIN policy. This class is a POA-scoped interceptor which may be installed by a `POALifeCycleInterceptor` when the POA is created.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

ActiveObjectLifeCycleInterceptor methods

```
virtual void create(const PortableServer::ObjectId&
    oid, PortableServer::ServantBase* servant,
    PortableServer::POA_ptr adapter);
```

This method is invoked after an object has been added to the Active Object Map, either through explicit or implicit activation, using either direct APIs or a ServantActivator. The object reference and the POA of the new active object are passed as parameters.

Parameter	Description
oid	Object ID for the object currently activated.
servant	Associated servant
adapter	The Portable Object Adapter (POA) being created or destroyed.

```
virtual void destroy(const PortableServer::ObjectId&
    oid, PortableServer::ServantBase* servant,
    PortableServer::POA_ptr adapter);
```

This method is called after an object has been deactivated and etherealized. The object reference and the POA of the object are passed as parameters.

Parameter	Description
oid	Object ID for the object currently activated
servant	Associated servant
adapter	The Portable Object Adapter (POA) being created or destroyed.

ActiveObjectLifeCycleInterceptorManager

```
class
PortableServerExt::ActiveObjectLifeCycleInterceptorMa
nager public interceptor::InterceptorManager, public
VISPpseudoInterface
```

This is the class that manages all ActiveObjectLifeCycleInterceptors registered in its scope. Each POA has one single ActiveObjectLifeCycleInterceptorManager.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

ActiveObjectLifeCycleInterceptorManager method

```
virtual void add(ActiveObjectLifeCycleInterceptor
    interceptor_ptr interceptor);
```

This method may be invoked to add an ActiveObjectLifeCycleInterceptor to the chain.

ServerRequestInterceptor

```
class Interceptor::ServerRequestInterceptor public
    VISPpseudoInterface
```

The ServerRequestInterceptor class is a POA-scoped interceptor which may be installed by a POALifeCycleInterceptor at POA creation time. This class may be used to perform access control, to examine and insert service contexts, and to change the reply status of a request.

Include file

Include the interceptor_c.hh file when you use this class.

ServerRequestInterceptor methods

```
virtual void preinvoke(CORBA::Object_ptr _target, const
    char* operation,
    const IOP::ServiceContextList& service_contexts,
    CORBA::MarshalInBuffer& payload, VISClosure& closure)
    raises(ForwardRequestException);
```

This method is invoked by the ORB on every request, before the request is demarshaled. An exception thrown from this interceptor results in the request being completed immediately. This method is called before any ServantLocators are invoked. The result may be that the servant may not be available while this method is running.

Parameter	Description
target	The client object which is being bound to the server.
operation	Identifies the name of the operation being invoked.
service_contexts	Identifies the services assigned by the Orb. These services are registered with the OMG.
payload	Marshalled buffer.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void postinvoke_premarshal(CORBA::Object_ptr
    target, IOP::ServiceContextList&
    ServiceContextList, CORBA::Environment_ptr env,
    VISClosure& closure);
```

This method is invoked after an upcall to the servant but before marshaling the reply. An exception here is handled by interrupting the chain: the request is not sent to the server and exceptionoccurred() is called on all interceptors in the chain

Parameter	Description
target	The client object which is being bound to the server.
ServiceContext List	Identifies the services assigned by the Orb. These services are registered with the OMG.
env	Contains information on the exception that was raised.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void postinvoke_postmarshal(CORBA::Object_ptr  
    _target, CORBA::MarshalOutBuffer& _payload,  
    VISClosure& _closure);
```

This method is invoked after marshaling the reply but before sending the reply to the client. Exceptions thrown here are ignored. The entire chain is guaranteed to be called.

Parameter	Description
target	The object to which that application was attempting to bind.
payload	Marshalled buffer.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

target	The object to which that application was attempting to bind.
payload	Marshalled buffer.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

```
virtual void exception_occurred(CORBA::Object_ptr  
    _target, CORBA::Environment_ptr _env, VISClosure&  
    _closure);
```

This method is invoked by the ORB when an exceptionoccurred interceptor is called on all remaining interceptors in the chain after an exception occurred in one of the prepare_reply interceptors. An exception thrown during this call replaces the existing exception in the environment

Parameter	Description
target	The client object which is being bound to the server.
env	Contains information on the exception that was raised.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

target	The client object which is being bound to the server.
env	Contains information on the exception that was raised.
closure	May contain data saved by one interceptor method that can be retrieved later by another interceptor method.

ServerRequestInterceptorManager

```
class Interceptor::ServerRequestInterceptorManager  
    public InterceptorManager, public VISPpseudoInterface
```

This is the class that manages all ServerRequestInterceptors registered in its scope. Each POA has one single ServerRequestInterceptorManager.

Include file

Include the `interceptor_c.hh` file when you use this class.

ServerRequestInterceptorManager method

```
virtual void add(ServerRequestInterceptor_ptr  
    interceptor);
```

Invoke this method to add a ServerRequestInterceptor to the chain.

IORCreationInterceptor

```
class PortableServerExt::IORInterceptor public  
    VISPpseudoInterface
```

The IORCreationInterceptor is a per-POA interceptor which may be installed by a POALifeCycleInterceptor at POA creation time. The

interceptor may be used to modify IORs by adding additional profiles or components. This class is typically used to support services such as transactions or firewall.

This kind of interceptor is used to automatically change the IOR templates on certain classes of POAs whose names and identities may not be known at development time. This may be the case with services such as Transaction and Firewall.

Note

To change all the IORs created by a POA, simply modify the IORTemplate for that POA. The change will apply only to newly created IORs and not to any existing ones.

Making radical changes to the IOR is not recommended.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

IORInterceptor method

```
virtual void create(PortableServer::POA poa,  
                    IOP::IORValue*& ior);
```

The method is called whenever the POA needs to create an object reference. It takes the POA and the IORValue for the reference as arguments. The interceptor may modify the IORValue by adding additional profiles or components, or changing the existing profiles or components.

Parameter	Description
poa	The ID associated with the current POA being created.
ior	The IOR for the server object to which the client is binding.

IORCreationInterceptorManager

```
class PortableServerExt::IORCreationInterceptorManager  
public interceptor::InterceptorManager, public  
VISPseudoInterface
```

This is the class that is used to manage (add) IOR interceptors to the local chain. Each POA has one single IORInterceptorManager.

Include file

Include the `PortableServerExt_c.hh` file when you use this class.

IORCreationInterceptorManager method

```
virtual void add(IORCreationInterceptor_ptr  
                 _interceptor);
```

This method may be invoked to add an IORInterceptor to the local chain.

VISClosure

```
struct VISClosure
```

This structure is used to store data so that it can be shared between different invocations of interceptor methods. The data that is stored is un-typed and can represent state information related to an operation request or a bind or locate request. It is used in conjunction with the `VISClosureData` class.

Include file

Include the `vclosure.h` file when you use this class.

VISClosure members

```
CORBA::ULong id
```

You can use this data member to uniquely identify this object if you are using more than one `VISClosure` object.

```
void *data
```

This data member points to the un-typed data that may be stored or accessed by an interceptor method.

```
VISClosureData *managedData
```

This data member points to the `VISClosureData` class that represents the actual data. You may cast your managed data to this type.

VisExtendedClosure

```
class VISExtendedClosure : public VISClosure {
public:
    interceptor::RequestInfo reqInfo;
    CORBA::MarshalInBuffer_ptr payload;
};
```

This interface is a derived class of `VISClosure` and contains a `RequestInfo` for read only attribute.

Code sample

This sample shows the `RequestInfo` IDL.

```
struct RequestInfo {
    CORBA::Boolean response_expected;
    CORBA::ULong request_id;
};
```

You can cast the `VISClosure` object passed to the `ServerRequestInterceptor` and `ClientRequestInterceptor` to its subclass, `VISExtendedClosure`. `VISExtendedClosure` can be used to extract the `RequestInfo`, from which you can extract the `request_id` and `response_expected`. The `request_id` is the unique id assigned to the request. The `response_expected` flag indicates whether the request is a one-way call.

```
CORBA::Boolean response_expected =
```

```
((VISExtendedClosure)closure).reqInfo.response_expected;
CORBA::ULong request_id =
((VISExtendedClosure)closure).reqInfo.request_id;

For more information, please see the example in examples/interceptor/
client_server.
```

VISClosureData

```
class VISClosureData
```

This class represents managed data that can be shared between different invocations of interceptor methods.

VISClosureData methods

```
virtual void _VisClosureData();
```

This is the default destructor.

```
virtual void _release();
```

Releases this object and decrements the reference count. When the reference count reaches 0, the object is deleted.

ChainUntypedObjectWrapperFactory

```
class
    VISOObjectWrapper::ChainUntypedObjectWrapperFactory:
    public UntypedObjectWrapperFactory
```

This interface is used by a client or server application to add or remove an UntypedObjectWrapperFactory object. An UntypedObjectWrapperFactory is used to create an UntypedObjectWrapper for each object a client application binds to or for each object implementation created by a server application.

See “Using object wrappers” in the *VisiBroker C++ Developer’s Guide* for more information about how to use the object wrappers.

Include file

Include the `vobjwrap.h` file when you use this class.

ChainUntypedObjectWrapperFactory methods

```
void add(UntypedObjectWrapperFactory_ptr
factory, Location loc);
```

This method adds the specified un-typed object wrapper factory for a client application, server application, or collocated application.

If your application is acting as both a client application and a server application, that is, a collocated application, you can install an un-typed object wrapper factory. If you do so, the wrapper’s methods are invoked for both invocations on bound objects and operation requests received by object implementations. In other words, they are invoked on both the client and server portions of the application.

Note

On the client side, un-typed object wrapper factories must be defined before any objects are bound. On the server side, un-typed object wrapper factories must be defined before an invocation for an object implementation is received.

Parameter	Description
factory	A pointer to the factory to be registered.
loc	The location of the factory being added, which should be one of the following values: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

```
void remove(UntypedObjectWrapperFactory_ptr factory,  
           Location loc);
```

This method removes the specified un-typed object wrapper factory from the specified location.

If your application is acting as both a client and a server, you can remove the object wrapper factories for either the client side objects, server side implementations, or both.

Note

Removing one or more object wrapper factories from a client does not affect objects of that class which are already bound by the client. Only subsequently bound objects will be affected.

Removing object wrapper factories from a server does not affect object implementations that have already serviced requests. Only subsequently created object implementations will be affected.

Parameter	Description
factory	A pointer to the factory to be registered.
loc	The location of the factory being removed; one of the following values: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

```
static CORBA::ULong count(Location loc);
```

This static method returns the number of un-typed object wrapper factories installed for the specified location.

Parameter	Description
loc	The location of the factories: VISObjectWrapper::Client VISObjectWrapper::Server VISObjectWrapper::Both

UntypedObjectWrapper

```
class VISObjectWrapper::UntypedObjectWrapper : public  
    VISResource
```

You use this class to derive and implement an un-typed object wrapper for a client application, a server application, or collocated application. When you derive an un-typed object wrapper from this class, you define a `pre_method` method that is invoked before a request is issued by a client application or before it is processed by an object implementation on the server side. You also define a `post_method` method that will be invoked

after an operation request is processed by an object implementation on the server side or after a reply has been received by a client application.

You must also derive a factory class that will create your un-typed wrapper objects. Derive it from the `UntypedObjectWrapperFactory` class, described in “[UntypedObjectWrapper](#)” on page 253.

Refer to the ***VisiBroker C++ Developer's Guide*** for more information about how to use the object wrappers.

Quality of Service interfaces and classes

This section describes the VisiBroker for C++ implementation of the Quality of Service APIs. See “[Core interfaces and classes](#)” for information about creating policies.

CORBA::PolicyManager

```
class CORBA::PolicyManager
```

This class is used to set and access policy overrides at the VisiBroker ORB level. Policies defined at the VisiBroker ORB level override any system defaults. The instance belonging to the manager thread is accessible by using `resolve_initial_reference("PolicyManager")` and narrowing down to `PolicyManager`.

IDL definition

```
module CORBA {
    interface PolicyManager {
        PolicyList get_policy_overrides(in PolicyTypeSeq ts);
        void set_policy_overrides(in PolicyList policies,
                                  in SetOverrideType set_add)
            raises (InvalidPolicies);
    };
}
```

Include file

Include the file `corba.h` when you use this class.

Methods

```
CORBA_PolicyList* get_policy_overrides (PolicyTypeSeq  
    ts);
```

This method returns a policy list containing the policies of the requested policy types. If the specified sequence is empty (that is, if the length of the list is zero), all policies at this scope are returned. If none of the requested policy types is set at the target **PolicyManager**, an empty sequence is returned.

Parameter	Description
<code>ts</code>	A sequence containing the requested policy types.

```
void set_policy_overrides (const CORBA_PolicyList&
    policies, CORBA::SetOverrideType set_add)
```

This method updates the current set of policies with the requested list of policy overrides. To remove all overrides from a **PolicyManager**, invoke `set_policy_overrides` with an empty sequence of policies and a mode of `SET_OVERRIDE`.

Only certain policies that pertain to the invocation of an operation at the client end can be overridden using this operation. An attempt to override any other policy results in the raising of the CORBA::NO_PERMISSION exception. If the request would put the set of overriding policies for the target PolicyManager in an inconsistent state, no policies are changed or added, and the exception InvalidPolicies is raised. There is no evaluation of compatibility with policies set within other PolicyManagers.

Parameter	Description
policies	A sequence of references to Policy objects.
set_add	Indicates whether these policies should be added (ADD_OVERRIDE) to any other overrides that already exist in the PolicyManager or added to a clean PolicyManager free of any other overrides (SET_OVERRIDE).

CORBA::PolicyCurrent

```
class CORBA::PolicyCurrent
```

This class provides access to policies overridden at the thread level and is defined with operations for querying and applying quality of service values to a thread. Policies defined at the thread level override any system defaults or values set at the VisiBroker ORB level but not those at the Object level. The instance belonging to the current thread is accessible by using `resolve_initial_reference("PolicyCurrent")` and narrowing down to `PolicyCurrent`.

IDL definition

```
interface PolicyCurrent : PolicyManager, Current {
};
```

Include file

Include the file `corba.h` when you use this class.

CORBA::Object

```
class CORBA::Object
```

The VisiBroker Edition implementation of the Quality of Service API allows policies to be assigned to objects, threads, and VisiBroker ORBs. Policies assigned to Objects override all other policies.

IDL definition

```
#pragma prefix "omg.org"
module CORBA {
    interface Object {
        Policy get_client_policy(in PolicyType type);
        Policy get_policy(in PolicyType type);
        PolicyList get_policy_overrides(in PolicyTypeSeq
types);
        Object set_policy_overrides(in PolicyList
policies,in SetOverrideType
```

```

        set_add)
        raises (InvalidPolicies);
    boolean validate_connection(out PolicyList
inconsistent_policies);
    };
};

```

Include file

Include the file corba.h when you use this class.

Methods

```
CORBA::Policy_ptr get_client_policy(CORBA::PolicyType
type);
```

Returns the effective overriding Policy for the object reference. The effective override is obtained by first checking for an override of the specified PolicyType at the Object scope, then at the Current scope, and finally at the VisiBroker ORB scope. If no override is present for the requested PolicyType, the system-dependent default value for that PolicyType is used. Portable applications are expected to set the desired "defaults" at the VisiBroker ORB scope since default Policy values are not specified.

```
CORBA::Policy_ptr get_policy(CORBA::PolicyType type);
```

Returns the effective Policy for the object reference. The effective Policy is the one that would be used if a request were made. This Policy is determined first by obtaining the effective override for the PolicyType as returned by get_client_policy.

The effective override is then compared with the Policy as specified in the IOR. The effective Policy is the intersection of the values allowed by the effective override and the IOR-specified Policy. If the intersection is empty, the system exception INV_POLICY is raised. Otherwise, a Policy with a value legally within the intersection is returned as the effective Policy. The absence of a Policy value in the IOR implies that any legal value may be used. To ensure the accuracy of the returned effective Policy, invoke non_existent or validate_connection on an object reference prior to get_policy. If get_policy is invoked prior to the object reference being bound, the returned effective Policy is implementation-dependent. In that situation, a compliant implementation may do any of the following: raise the exception CORBA::BAD_INV_ORDER, return some value for that PolicyType which may be subject to change once a binding is performed, or attempt a binding and then return the effective Policy. Note that if the RebindPolicy has a value of TRANSPARENT, the effective Policy may change from invocation to invocation due to transparent rebinding.

Note

In VisiBroker, this method gets the Policy assigned to an Object, thread or the VisiBroker ORB.

```
CORBA::Object_ptr set_policy_overrides(const
CORBA_PolicyList& _policies, CORBA::SetOverrideType
_set_add);
```

This method works as does the PolicyManager method of the same name. However, this method updates the current set of policies of an Object, thread or the VisiBroker ORB with the requested list of Policy overrides. In

addition, this method returns a CORBA::Object whereas other methods of the same name return void.

```
CORBA::Boolean validate_connection(CORBA_PolicyList&
    inconsistent_policies);
```

Returns the value TRUE if the current effective policies for the Object will allow an invocation to be made. If the object reference is not yet bound, a binding will occur as part of this operation. If the object reference is already bound, but current policy overrides have changed or for any other reason the binding is no longer valid, a rebind will be attempted regardless of the setting of any RebindPolicy override. The validate_connection operation is the only way to force such a rebind when implicit rebinds are disallowed by the current effective RebindPolicy. The attempt to bind or rebind may involve processing GIOP LocateRequests by the VisiBroker ORB.

This method returns the value FALSE if the current effective policies would cause an invocation to raise the system exception INV_POLICY. If the current effective policies are incompatible, the out parameter inconsistent_policies contains those policies causing the incompatibility. This returned list of policies is not guaranteed to be exhaustive. If the binding fails due to some reason unrelated to policy overrides, the appropriate system exception is raised.

Messaging::RebindPolicy

```
class Messaging::RebindPolicy
```

The VisiBroker implementation of RebindPolicy is a complete implementation of RebindPolicy as defined in the Messaging Specification with enhancements to support failover.

The RebindPolicy of the VisiBroker ORB determines how it handles GIOP location-forward messages and object failures. The VisiBroker ORB handles fail-over/rebind by looking at the effective policy at the CORBA::Object instance.

The OMG implementation, derived from CORBA::Policy, determines whether the VisiBroker ORB may transparently rebind once it is successfully bound to a target server. The extended implementation determines whether the VisiBroker ORB may transparently failover once it is successfully bound to a target Object, thread, or VisiBroker ORB.

IDL definition

```
#pragma prefix "omg.org"
module Messaging {
    typedef short RebindMode;
    const CORBA::PolicyType REBIND_POLICY_TYPE = 23;
    local interface RebindPolicy CORBA::Policy {
        readonly attribute RebindMode rebind_mode;
    };
};
```

Include file

Include the file corba.h when you use this class.

Policy values

Note

Policies are enforced only after a successful bind.

The OMG Policy values that can be set as the Rebind Policy are:

Policy Value	Description
TRANSPARENT	This policy allows the VisiBroker ORB to silently handle object-forwarding and necessary reconnection when making a remote request. This is the least restrictive OMG policy value.
NO_REBIND	This policy allows the VisiBroker ORB to silently handle reopening of closed connections while making a remote request, but prevents any transparent object-forwarding that would cause a change in the client-side effective QoS policies.
NO_RECONNECT	This policy prevents the VisiBroker ORB from silently handling object-forwards or the reopening of closed connections. This is the most restrictive OMG policy value.

The VisiBroker-specific values that can be set as the Rebind Policy are:

Policy Value	Description
VB_TRANSPARENT	This policy extends TRANSPARENT behavior to failover conditions in the object, the thread and the VisiBroker ORB. This is the default policy. If this policy is set, if a remote invocation fails because the server object goes down, then the VisiBroker ORB tries to reconnect to another server using the osagent. The VisiBroker ORB masks the communication failure and does not throw an exception to the client.
VB_NOTIFY_REBIND	VB_NOTIFY_REBIND behaves as does VB_TRANSPARENT but throws an exception when the communication failure is detected. It will try to transparently reconnect to another object if the invocation is re-attempted.
VB_NO_REBIND	VB_NO_REBIND does no failover. It only allows the client VisiBroker ORB to reopen a closed GIOP reconnection to the same server; it does not allow object forwarding of any kind.

QoSExt::DeferBind Policy

```
class QoSExt::DeferRebindPolicy
```

By default, the VisiBroker ORB connects to the (remote) object when it receives a `bind()` or a `string_to_object` call.

If set to TRUE, this policy changes this behavior; it causes the VisiBroker ORB to delay contacting the Object until the first invocation.

IDL definition

```
#pragma prefix "inprise.com"
module QoSExt {
    interface DeferBindPolicy :CORBA::Policy {
        readonly attribute boolean value;
```

```
    };  
};
```

Include file

Include the file corba.h when you use this class.

QoSExt::RelativeConnectionTimeoutPolicy

```
class QoSExt::RelativeConnectionTimoutPolicy
```

The RelativeConnectionTimeoutPolicy indicates a timeout after which attempts to connect to an object using one of the available endpoints is aborted. The policy value of unsigned longlong type specifies the timeout in 100s of nanoseconds. It is applied to every endpoint that the VisiBroker ORB tries to connect to. Therefore, if multiple connection attempts are made, the elapsed time will be a multiple of the configured timeout. The default value of 0 sets the timeout value to that of the operating system default timeout.

Note

This Policy is not enforced for in-process communications.

IDL definition

```
module QoSExt {  
    const CORBA::PolicyType RELATIVE_CONN_TIMEOUT_POLICY_TYPE = 0x56495304;  
    local interface RelativeConnectionTimeoutPolicy :CORBA::Policy {  
        readonly attribute TimeBase::TimeT relative_expiry;  
    };  
};
```

Include file

Include the file corba.h when you use this class.

Messaging::RelativeRequestTimeoutPolicy

```
class Messaging::RelativeRequestTimeoutPolicy
```

The RelativeRequestTimeoutPolicy specifies the maximum time that a client is to block waiting to send an operation request. If the request times out, CORBA::TIMEOUT exception is raised.

IDL definition

```
module Messaging{  
    const CORBA::PolicyType RELATIVE_REQ_TIMEOUT_POLICY_TYPE = 31;  
    local interface RelativeRequestTimeoutPolicy : CORBA::Policy {  
        readonly attribute TimeBase::TimeT relative_expiry;  
    };  
};
```

Include file

Include the file corba.h when you use this class.

Messaging::RelativeRoundtripTimeoutPolicy

```
class Messaging::RelativeRoundtripTimeoutPolicy
```

The RelativeRoundtripTimeoutPolicy specifies the relative amount of time for which a Request or its corresponding Reply may be delivered. If a response has not yet been delivered after this amount of time, the Request is canceled. Also, if a Request had already been delivered and a Reply is returned from the target, the Reply is discarded after this amount of time. This policy applies to both synchronous and asynchronous invocations. Assuming the request completes within the specified timeout, the Reply will never be discarded due to timeout. The timeout value is specified in 100s of nanoseconds. This policy is also effective in the initial establishment of a connection.

IDL definition

```
module Messaging{
    const CORBA::PolicyType RELATIVE_RT_TIMEOUT_POLICY_TYPE = 32;
    local interface RelativeRoundtripTimeoutPolicy : CORBA::Policy {
        readonly attribute TimeBase::TimeT relative_expiry;
    };
};
```

Include file

Include the file corba.h when you use this class.

Messaging::SyncScopePolicy

```
class Messaging::SyncScopePolicy
```

The SyncScopePolicy defines the level of synchronization for a request with respect to the target. Values of type SyncScope are used in conjunction with a SyncScopePolicy to control the behavior of one-way operations.

The default SyncScopePolicy is SYNC_WITH_TRANSPORT.

IDL definition

```
module Messaging{
    const CORBA::PolicyType SYNC_SCOPE_POLICY_TYPE = 24;
    const SyncScope SYNC_NONE = 0;
    const SyncScope SYNC_WITH_TRANSPORT = 1;
    const SyncScope SYNC_WITH_SERVER = 2;
    const SyncScope SYNC_WITH_TARGET = 3;
    local interface SyncScopePolicy : CORBA::Policy {
        readonly attribute SyncScope synchronization;
    };
};
```

Include file

Include the file `corba.h` when you use this class.

IOP and IIOP interfaces and classes

This section describes the VisiBroker for C++ implementation of the key General Inter-ORB Protocol interfaces and other structures defined by the CORBA specification. For a complete description of these interfaces, refer to the *OMG CORBA/IIOP Specification*.

IIOP::ProfileBody

```
struct ProfileBody
```

This structure contains information about the protocol supported by an object.

```
module IIOP {  
    . . .  
    struct ProfileBody {  
        GIOP::Version iiop_version;  
        string host;  
        unsigned short port;  
        sequence<octet> object_key;  
        sequence<IOP::TaggedComponent> components;  
    };  
};
```

Include file

The `IOP_c.hh` file should be included when you use this structure.

ProfileBody members

```
GIPOP::Version iiop_version
```

The version of IIOP supported.

```
CORBA::String_var host
```

The name of the host where the server hosting the object is running.

```
CORBA::Ushort port
```

The port number to use for establishing a connection to the server hosting the object.

```
CORBA::OctetSequence object_key
```

Object keys are stored in a vendor-specific format and are generated when an IOR is created.

```
IIOP::MultiComponentProfile components
```

A sequence of TaggedComponents which contain information about the protocols that are supported.

IOP::IOR

```
struct IOR
```

This structure represents an Interoperable Object Reference and is used to provide important information about object references. Your client application can create a stringified IOR by invoking the `ORB::object_to_string` method.

Include file

The `IOP_c.hh` file should be included when you use this structure.

IOR members

```
CORBA::String_var type_id
```

This data member describes the type of object reference that is represented by this IOR.

```
TaggedProfileSeq profiles
```

This data member represents a sequence of one or more `TaggedProfile` structures which contain information about the protocols that are supported.

IOP::TaggedProfile

```
struct TaggedProfile
```

This structure represents a particular protocol that is supported by an Interoperable Object Reference (IOR).

Include file

The `IOP_c.hh` file should be included when you use this structure.

TaggedProfile members

```
ProfileID tag
```

The contents of the profile data. Its value should be one of the following:

Value	Description
TAG_INTERNET_IOP	Indicates the protocol is standard IIOP.
TAG_MULTIPLE_COMPONENTS	Indicates the profile data contains a list of VisiBroker ORB services available using the protocol.
TAG_VB_LOCATOR	Indicates that the IOR is an interim, pseudo-object that is used until the real IOR is received by the osagent.
TAG_VSGN_LIOP	Indicates the protocol is IOP over a local IPC mechanism.

```
CORBA_OctetSequence profile_data
```

This data member encapsulates all the protocol information needed to invoke an operation on an IOR.

Marshal buffer interfaces and classes

This section describes the buffer class used for marshaling data to a buffer when creating an operation request or a reply message. It also describes the buffer class used for extracting data from a received operation request or reply message.

CORBA::MarshalInBuffer

```
class CORBA::MarshalInBuffer : public VISistream
```

This class represents a stream buffer that allows IDL types to be read from a buffer. Interceptor methods that you implement may use this class. Go to ["Portable Interceptor interfaces and classes for C++"](#) for more information on the interceptor interfaces.

The CORBA::MarshalInBuffer class is used on the client side to extract the data associated with a reply message. It is used on the server side to extract the data associated with an operation request. This class provides a wide range of methods for retrieving various types of data from the buffer.

This class also provides several static methods for testing and manipulating CORBA::MarshalInBuffer pointers.

A CORBA::MarshalInBuffer_var class is also offered. It provides a wrapper that automatically manages the contained object.

Include file

The **mbuf.h** file should be included when you use this class. This file gets included in **corba.h**. So, you don't have to include **mbuf.h** separately.

CORBA::MarshalInBuffer constructors/ destructors

```
CORBA::MarshalInBuffer(char *read_buffer, CORBA::ULong
    length, CORBA::Boolean release_flag=0, CORBA::ULong
    start_offset=0, CORBA::Boolean byte_order =
    CORBA::ByteOrder);
```

This is the default constructor.

Parameter	Description
read_buffer	The buffer where the marshaled data will actually be stored.
length	The maximum number of bytes that may be stored in read_buffer.
release_flag	If set to TRUE, the memory associated with read_buffer is freed when this object is destroyed. The default value is FALSE.

Parameter	Description
start_offset	The starting offset wherein data is written in the <code>read_buffer</code> . The default value is 0.
byte_order	Set this to TRUE to indicate that little-endian byte ordering is being used. Set to FALSE to indicate that big-endian byte ordering is being used.

`virtual ~CORBA::MarshalInBuffer();`

This is the default destructor. The buffer memory associated with this object is released if the `release_flag` is set to TRUE. The `release_flag` may be set when the object is created or by invoking the `release_flag` method, described in “[void release_flag\(CORBA::Boolean val\);](#)” on page 267.

CORBA::MarshalInBuffer methods

`char *buffer() const;`

Returns a pointer to the buffer associated with this object.

`void byte_order(CORBA::Boolean val) const;`

Sets the byte ordering for this message buffer.

Parameter	Description
val	Set this to TRUE to indicate that little-endian byte ordering is being used. Set to FALSE to indicate that big-endian byte ordering is being used.

`CORBA::Boolean byte_order() const;`

Returns TRUE if the buffer uses little-endian byte ordering. FALSE is returned if big-endian byte ordering is used.

`CORBA::ULong curoff() const;`

Returns the current offset within the buffer associated with this object.

`virtual VISistream& get(char& data);
virtual VISistream& get(unsigned char& data);`

These methods allow you to retrieve a single character from the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
data	The location where the retrieved char or unsigned char is to be stored.

`virtual VISistream& get(<data_type> data, unsigned size);`

These methods allow you to retrieve a sequence of data from the buffer at the current location. There is a separate method for each of the listed target data types.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
data	The location where the retrieved data is to be stored. The supported target data types are: char* float* unsigned char* double* short* long double* unsigned short* VISLongLong* int* VISULongLong* unsigned int* wchar_t* long* unsigned long*
size	The number of the specified data types to be retrieved.

```
virtual VISistream& getCString(char* data, unsigned maxlen);
```

This method allows you to retrieve a character string from the buffer at the current location. It returns a pointer to the location within the buffer immediately following the end of the data that was just retrieved.

Parameter	Description
data	The location where the retrieved character string is to be stored.
maxlen	The maximum number of characters to be retrieved.

```
virtual int is_available(unsigned long size);
```

Returns 1 if the specified size is less than or equal to the size of the buffer associated with this object.

Parameter	Description
size	Number of bytes that need to fit within this buffer.

```
virtual CORBA::ULong length() const;
```

Returns the total number of bytes in this object's buffer.

```
virtual void new_encapsulation() const;
```

Resets the starting offset within the buffer to 0.

```
void release_flag(CORBA::Boolean val);
```

Enables or disables the automatic freeing of buffer memory when this object is destroyed.

Parameter	Description
val	If val is set to TRUE, the buffer memory for this object will be freed when this object is destroyed. If val is set to FALSE, the buffer will not be freed when this object is destroyed.

```
CORBA::Boolean release_flag() const;
>Returns TRUE if the automatic freeing of this object's buffer memory is
enabled, otherwise FALSE is returned.

void reset();
Resets the starting offset, current offset and seek position to zero.

void rewind();
Resets the seek position to zero.

CORBA::ULong seekpos(CORBA::ULong pos);
Sets the current offset to the value contained in pos. If pos specifies an
offset that is greater than the size of the buffer, a CORBA::BAD_PARAM
exception is raised.

static CORBA::MarshalInBuffer
*_duplicate(CORBA::MarshalInBuffer_ptr ptr);
Returns a duplicate pointer to the object pointed to by ptr and increments
this object's reference count.

static CORBA::MarshalInBuffer *_nil();
Returns a NULL pointer of type CORBA::MarshalInBuffer.

static void _release(CORBA::MarshalInBuffer_ptr ptr);
Reduces the reference count of the object pointed to by ptr. When the
reference count reaches 0, the object is destroyed. If the object's
release_flag was set to TRUE when the object was constructed, the buffer
associated with the object is freed.
```

CORBA::MarshalInBuffer operators

```
virtual VISistream&operator>>(<data_type> data);
```

This stream operator allows you retrieve a sequence of data of the specified source data_type at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just written.

Parameter	Description
data	The data to be written to the buffer. The supported source data types are:
char*&	long&
char&	unsigned long&
unsigned char&	float&
short&	double&
unsigned short&	long double&
int&	wchar_t*&
unsigned int&	wchar_t&

CORBA::MarshalOutBuffer

```
class CORBA::MarshalOutBuffer : public VISostream
```

This class represents a stream buffer that allows IDL types to be written to a buffer and may be used by interceptor methods that you implement. Go to “[VisiBroker Interceptor and object wrapper interfaces and classes for C++](#)”, for more information on the interceptor interfaces.

The CORBA::MarshalOutBuffer class is used on the client side to marshal the data associated with an operation request. It is used on the server side to marshal the data associated with a reply message. This class provides a wide range of methods for adding various types of data to the buffer or for retrieving what was written from the buffer.

This class provides several static methods for testing and manipulating CORBA::MarshalOutBuffer pointers.

A CORBA::MarshalOutBuffer_var class is also offered. It provides a wrapper that automatically manages the contained object.

Include file

The **mbuf.h** file should be included when you use this class. This file gets included in **corba.h**. So, you don't have to separately include **mbuf.h**.

CORBA::MarshalOutBuffer constructors/ destructors

```
CORBA::MarshalOutBuffer(CORBA::ULong initial_size =  
    255, CORBA::Boolean release_flag = 0, CORBA::ULong  
    start_offset = 0);
```

Creates a marshalOutBuffer of size `initial_size`. The MarshalOutBuffers are capable of resizing themselves during a put operation. When there is not enough space in the buffer to hold all the data written to it, the size of the buffer doubles.

Parameter	Description
<code>initial_size</code>	The initial size of the buffer associated with this object. The default size is 255 bytes.
<code>release_flag</code>	If set to TRUE, the memory associated with <code>read_buffer</code> is freed when this object is destroyed. The default value is FALSE.
<code>start_offset</code>	Set the starting offset within the buffer. Defaults to 0, that is starting from the very beginning of the buffer.

```
CORBA::MarshalOutBuffer(char *read_buffer, CORBA::ULong  
    len, CORBA::Boolean release_flag=0, CORBA::ULong  
    start_offset = );
```

Creates an object with the specified buffer, buffer length and release flag value.

Parameter	Description
<code>read_buffer</code>	The buffer where the marshaled data will actually be stored.
<code>length</code>	The maximum number of bytes that may be stored in <code>read_buffer</code> .

Parameter	Description
release_flag	If set to TRUE, the memory associated with <code>read_buffer</code> is freed when this object is destroyed. The default value is FALSE.
start_offset	Set the starting offset within the buffer. Defaults to 0, that is starting from the very beginning of the buffer.

`virtual ~CORBA::MarshalOutBuffer();`

This is the default destructor. The buffer memory associated with this object is released if the `release_flag` is set to TRUE. The `release_flag` may be set when the object is created or by invoking the `release_flag` method, described in ["CORBA::Boolean release_flag\(\) const;" on page 268](#).

CORBA::MarshalOutBuffer methods

`char *buffer() const;`

Returns a pointer to the buffer associated with this object.

`CORBA::ULong curoff() const;`

Returns the current offset within the buffer associated with this object.

`virtual CORBA::ULong length() const;`

Returns the total number of bytes in this object's buffer.

`virtual void new_encapsulation() const;`

Resets the starting offset within the buffer to zero.

`virtual VISostream& put(char data);`

Adds a single character to the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description
data	The char to be stored.

`virtual VISostream& put(const <data_type> data,
 unsigned size);`

These methods allow you to store a sequence of data in the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description														
data	The data is to be stored. The supported source data types are: <table> <tr> <td>char*</td> <td>float*</td> </tr> <tr> <td>unsigned char*</td> <td>double*</td> </tr> <tr> <td>short*</td> <td>long double*</td> </tr> <tr> <td>unsigned short*</td> <td>VISLongLong*</td> </tr> <tr> <td>int*</td> <td>VISULongLong*</td> </tr> <tr> <td>unsigned int*</td> <td>wchar_t*</td> </tr> <tr> <td>long*</td> <td></td> </tr> </table>	char*	float*	unsigned char*	double*	short*	long double*	unsigned short*	VISLongLong*	int*	VISULongLong*	unsigned int*	wchar_t*	long*	
char*	float*														
unsigned char*	double*														
short*	long double*														
unsigned short*	VISLongLong*														
int*	VISULongLong*														
unsigned int*	wchar_t*														
long*															

Parameter	Description
size	unsigned long* The number of the specified data types to be stored.

virtual VIStream& putCString(const char* data);

This method allows you to store a character string into the buffer at the current location. It returns a pointer to the location within the buffer immediately following the end of the data that was just added.

Parameter	Description
data	The character string to be stored.

void release_flag(CORBA::Boolean val);

Enables or disables the automatic freeing of buffer memory when this object is destroyed.

Parameter	Description
val	If val is set to TRUE, the buffer memory for this object will be freed when this object is destroyed. If val is set to FALSE, the buffer will not be freed when this object is destroyed

CORBA::Boolean release_flag() const;

Returns TRUE if the automatic freeing of this object's buffer memory is enabled, otherwise returns FALSE.

void reset();

Resets the starting offset, current offset and seek position to zero.

void rewind();

Resets the seek position to zero.

CORBA::ULong seekpos(CORBA::ULong pos);

Sets the current offset to the value contained in pos. If pos specifies an offset that is greater than the size of the buffer, a CORBA::BAD_PARAM exception is raised.

static CORBA::MarshalOutBuffer

*** _duplicate(CORBA::MarshalOutBuffer_ptr ptr);**

Returns a duplicate pointer to this object pointed to by ptr and increments this object's reference count.

static CORBA::MarshalOutBuffer * _nil();

Returns a NULL pointer of type CORBA::MarshalOutBuffer.

static void _release(CORBA::MarshalOutBuffer_ptr ptr);

Reduces the reference count of the object pointed to by ptr. If the reference count is then zero, the object is destroyed. If the object's release_flag was set to TRUE when it was constructed, the buffer associated with the object is freed.

CORBA::MarshalOutBuffer operators

```
virtual VISostream& operator<< (<data_type> data);
```

This stream operator allows you to add data of the specified data_type to the buffer at the current location.

This method returns a pointer to the location within the buffer immediately following the end of the data that was just written.

Parameter	Description																		
data	<p>The data to be obtained to the buffer. The supported data types are:</p> <table><tbody><tr><td>const char*</td><td>float</td></tr><tr><td>char</td><td>double</td></tr><tr><td>unsigned char</td><td>long double</td></tr><tr><td>short</td><td>VISLongLong</td></tr><tr><td>unsigned short</td><td>VISULongLong</td></tr><tr><td>int</td><td>wchar_t*</td></tr><tr><td>unsigned int</td><td>wchar_t</td></tr><tr><td>long</td><td></td></tr><tr><td>unsigned long</td><td></td></tr></tbody></table>	const char*	float	char	double	unsigned char	long double	short	VISLongLong	unsigned short	VISULongLong	int	wchar_t*	unsigned int	wchar_t	long		unsigned long	
const char*	float																		
char	double																		
unsigned char	long double																		
short	VISLongLong																		
unsigned short	VISULongLong																		
int	wchar_t*																		
unsigned int	wchar_t																		
long																			
unsigned long																			

Location service interfaces and classes

This section describes the interfaces you can use to locate object instances on a network of Smart Agents. For more information on the Location Service, see "Using the Location Service" in the *VisiBroker for C++ Developer's Guide*.

Agent

```
class Agent : public CORBA::Object
```

This class provides methods that enable you to locate all instances of a particular object on a network of Smart Agents. The methods offered by this class are divided into two categories: those that query a Smart Agent for data about objects and those that deal with *triggers*.

Your client application can obtain object information based on an interface repository ID alone or in combination with an instance name.

Triggers allow your client application to be notified of changes in the availability of one or more object instances.

IDL definition

```
interface Agent {
    HostnameSeq all_agent_locations()
        raises (Fail);
    RepositoryIdSeq all_repository_ids()
        raises (Fail);
    ObjSeqSeq all_available()
        raises (Fail);
    ObjSeq all_instances (in string repository_id)
        raises (Fail);
    ObjSeq all_replica (in string repository_id, in string
instance_name)
        raises (Fail);
    DescSeqSeq all_available_descs()
        raises (Fail);
    DescSeq all_instances_descs (in string repository_id)
        raises (Fail);
    DescSeq all_replica_descs (in string repository_id,
        in string instance_name)
        raises (Fail);
    void reg_trigger(in TriggerDesc desc, in
TriggerHandler handler)
        raises (Fail);
    void unreg_trigger(in TriggerDesc desc, in
TriggerHandler handler)
        raises (Fail);
    attribute boolean willRefreshOADS;
};
```

Include file

You should include the **locate_c.hh** file when you use this class.

Agent methods

`ObjLocation::HostnameSeq_ptr all_agent_locations();`

Returns a sequence of host names representing the hosts on which osagent processes are currently executing.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

`ObjLocation::ObjSeqSeq all_available();`

Returns a sequence of object references for all objects currently registered with some Smart Agent on the network.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

`ObjLocation::DescSeqSeq_ptr all_available_descs();`

Returns descriptions for all objects currently registered with a Smart Agent on the network. The description information returned is organized by repository id.

See also

[“<type>Seq”](#)

This method throws the following exceptions:

Exception	Description
Fail	The FailReason values that may be presented include: NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

`ObjLocation::ObjSeq_ptr all_instances(const char *repository_id);`

Returns a sequence of object references to all instances with the specified repository_id.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object references to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO SUCH_TRIGGER, may be presented. For more information on the Fail class, see “ Fail ”.

`ObjLocation::DescSeq_ptr all_instances_descs(const char *repository_id);`

Returns description information for all object instances with the specified repository_id.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object descriptions to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO SUCH_TRIGGER, may be presented. For more information on the Fail class, see “ Fail ”.

`ObjLocation::ObjSeq_ptr all_replica(const char *repository_id, const char *instance_name);`

Returns a sequence of object references for objects with the specified repository_id and instance_name.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object references to be retrieved.
instance_name	The instance name of the object references to be returned.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO SUCH_TRIGGER, may be presented. For more information on the Fail class, see “ Fail ”.

```
ObjLocation::DescSeq_ptr all_replica_descs(const char
    *repository_id, const char *instance_name);
```

Returns a sequence of description information for all object instances with the specified repository_id and instance_name.

See also

[“<type>Seq”](#)

Parameter	Description
repository_id	The repository ID of the object descriptions to be retrieved.
instance_name	The instance name of the object descriptions to be retrieved.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO SUCH_TRIGGER, may be presented. For more information on the Fail class, see “Fail” .

```
CORBA::StringSequence* all_repository_ids();
```

This method retrieves all interfaces known to any osagent. This method throws the following exception:

Exception	Description
Fail	The FailReason values that may be presented include NO_AGENT_AVAILABLE, AGENT_ERROR. For more information on the Fail class, see “Fail” .

```
void reg_trigger(const ObjLocation::TriggerDesc& desc,
    ObjLocation::TriggerHandler_ptr hdrlr);
```

Registers the trigger handler hdrlr for object instances that match the description information specified in desc.

Note

A TriggerHandler is invoked every time an object that satisfies the trigger's description becomes available. If you are only interested in learning when the first instance of the object becomes available, you should use the unreg_trigger method to remove the trigger after the first notification is received.

Parameter	Description
desc	The object instance description information, which can contain combinations of the following information: repository ID, instance name, hostname. You can provide more or less information to narrow or widen the object instances to be monitored.
hdrlr	The trigger handler object being registered.

This method throws the following exceptions:

Exception	Description
Fail	Any of the FailReason values, other than NO SUCH_TRIGGER, may be presented. For more information on the Fail class, see “Fail” .

```
void unreg_trigger(const ObjLocation::TriggerDesc&
    desc, ObjLocation::TriggerHandler_ptr hdlr);
```

Unregisters the trigger handler `hdlr` for object instances that match the description information specified in `desc`.

Parameter	Description
<code>desc</code>	The object description information.
<code>hdlr</code>	The trigger handler object being unregistered.

This method throws the following exceptions:

Exception	Description
<code>Fail</code>	The only <code>FailReason</code> value possible is <code>NO SUCH_TRIGGER</code> . For more information on the <code>Fail</code> class, see " Fail ".

```
CORBA::Boolean willRefreshOADs();
```

Returns `TRUE` if the set of Object Activation Daemon is updated each time a method offered by this class is invoked, otherwise returns `FALSE`. If the cache is not refreshed on each invocation, the following conditions may occur:

- All objects are still reported, but their descriptor's activable flag may be incorrect.
- Any attempt to verify the existence of an object registered with an OAD that has been started since the last refresh of the OAD cache causes those objects to be activated by the OAD.

```
void willRefreshOADs(CORBA::Boolean val);
```

This class maintains a set of Object Activation Daemons. This method enables or disables the automatic refreshing of the OADs contained in this set.

Parameter	Description
<code>val</code>	If <code>TRUE</code> , the OAD set will be refreshed whenever a method offered by this class is invoked.

Desc

```
struct Desc
```

This structure contains information you use to describe the characteristics of an object. You pass this structure as an argument to several of the Location Service methods described in the chapter. The `Desc` structure, or a sequence of them, is returned by some of the Location Service methods.

See also

[“<type>Seq”](#)

IDL definition

```
module ObjLocation {
    struct Desc {
        Object ref;
        IIOP::ProfileBody iiop_locator;
        string repository_id;
        string instance_name;
        boolean activable;
        string agent_hostname;
    };
    . . .
};
```

Desc members

Object **ref**

A reference to the object being described.

IIOP::ProfileBody **iiop_locator**

Represents profile data for the object, described in "[IIOP::ProfileBody](#)".

CORBA::String_var **repository_id**

The object's repository identifier.

CORBA::String_var **instance_name**

The object's instance name.

CORBA::Boolean **activable**

Set to TRUE to indicate that this object is registered with the Object Activation Daemon. It is set to FALSE to indicate that the object was started manually and is registered with the osagent.

CORBA::String_var **agent_hostname**

The name of the host running the Smart Agent with which this object is registered.

Fail

```
class Fail : public CORBA::UserException
```

This exception class may be thrown by the Agent class to indicate various errors. The data member **FailReason** is used to indicate the nature of the failure.

Fail members

FailReason reason

Set to one of the following values to indicate the nature of the failure:

```
enum FailReason {
    NO_AGENT_AVAILABLE,
    INVALID_REPOSITORY_ID,
    INVALID_OBJECT_NAME,
    NO_SUCH_TRIGGER,
    AGENT_ERROR
};
```

TriggerDesc

```
struct TriggerDesc
```

This structure contains information you use to describe the characteristics of one or more objects for which you wish to register a TriggerHandler, described in “[TriggerHandler](#)” on page 279.

The host_name and instance_name members may be set to NULL to monitor the widest possible set of objects. The more information specified, the smaller the set of objects is.

IDL definition

```
module ObjLocation {  
    . . .  
    struct TriggerDesc {  
        string repository_id;  
        string instance_name;  
        string host_name;  
    };  
    . . .  
};
```

TriggerDesc members

`ORBA::String_var repository_id`

The repository identifiers of the objects to be monitored by the TriggerHandler. May be set to NULL to include all possible repository identifiers.

`CORBA::String_var instance_name`

The instance name of the object to be monitored by the TriggerHandler. May be set to NULL to include all possible instance names.

`CORBA::String_var host_name;`

The host name where the object or objects monitored by the TriggerHandler are located. May be set to NULL to include all hosts in the network.

TriggerHandler

You use this base class to derive your own callback object to be invoked every time an object becomes available or unavailable. You specify the criteria for the object or objects in which you are interested. You register your TriggerHandler object using the `Agent::reg_trigger` method, described in “[TriggerHandler](#)” on page 279.

You must provide implementations for the `impl_is_ready` and `impl_is_down` methods.

IDL definition

```
interface TriggerHandler {  
    void impl_is_ready(in Desc desc);  
    void impl_is_down(in Desc desc);  
};
```

Include file

You should include the **locate_c.hh** file when you use this class.

TriggerHandler methods

```
virtual void impl_is_ready(const Desc& desc) ;
```

This method is invoked by the Location Service when an object instance matching the criteria specified in desc becomes accessible.

Parameter	Description
desc	The object description information.

```
virtual void impl_is_down(const Desc& desc) ;
```

This method is invoked by the Location Service when an object instance matching the criteria specified in desc is no longer accessible.

Parameter	Description
desc	The object description information.

<type>Seq

This is a generalized class description for the following sequence classes used by the Location Service:

Class	Description
DescSeq	A sequence of Desc structures.
HostnameSeq	A sequence of host names.
ObjSeq	A sequence of object references.
RepositoryIdSeq	A sequence of repository identifiers.

Each class represents a particular sequence of <type>. The Location Service returns lists of information to your client application in the form of sequences which are mapped to one of these classes.

Each class offers operators for indexing items in the sequence just as you would a C++ array. Each class also offers methods for setting and obtaining the length of the array.

The code sample below shows the correct way to index a HostnameSeq returned from the Agent::all_agent_locations method.

```
. . .
ObjLocation::HostnameSeq_var hostnames(myAgent-
>all_agent_locations());
for (CORBA::ULong i=0; i < hostnames->length(); i++) {
    cout << "Agent host #" << i+1 << ":" << hostnames[i] <<
endl;
}
. . .
```

See also

[“<type>SeqSeq”](#)

<type>Seq methods

<type>& **operator []** (CORBA::ULong **index**) const;

Returns a reference to the element in the sequence identified by **index**.

Caution

You must use a CORBA::ULong type for the index. Using an int type may lead to unpredictable results.

Parameter	Description
index	The zero-based index of the element to be returned.

This method throws the following exception:

Exception	Description
CORBA::BAD_PARAM	The index specified is less than zero or greater than the size of the sequence.

CORBA::ULong **length()** const;

Returns the number of elements in the sequence.

void **length(CORBA::ULong len)** ;

Sets the maximum length of the sequence to the value contained in **len**.

Parameter	Description
len	The new length for the sequence.

<type>SeqSeq

This is a generalized class description for the following classes used by the Location Service:

Class	Description
DescSeqSeq	A sequence of DescSeq objects.
ObjSeqSeq	A sequence of ObjSeq objects.

Each class represents a particular sequence of <type>Seq. Some Location Service methods return lists of information to your client application in the form of sequences of sequences which are mapped to one of these classes.

Each class offers operators for indexing items in the sequence just as you would a C++ array. The class also offer methods for setting and obtaining the length of the array.

See also

[“<type>Seq”](#)

<type>SeqSeq methods

<type>Seq& **operator []** (CORBA::ULong **index**) const;

Returns a reference to the element in the sequence identified by **index**. The reference is to a one dimensional sequence, described in [“<type>Seq”](#)

Caution

You must use a CORBA::ULong type for the index. Using an int type may lead to unpredictable results.

Parameter	Description
index	The zero-based index of the element to be returned.

This method throws the following exceptions:

Exception	Description
CORBA::BAD_PARAM	The index specified is less than zero or greater than the size of the sequence.

`CORBA::ULong length() const;`

Returns the number of elements in the sequence.

`void length(CORBA::ULong len);`

Sets the maximum length of the sequence to the value contained in `len`.

Parameter	Description
len	The new length for the sequence.

Initialization interfaces and classes

This section describes the interfaces and classes that are provided for statically initializing VisiBroker ORB services such as interceptors.

VISInit

```
class VISInit
```

This abstract base class provides for the static initialization of service classes after the VisiBroker ORB and BOA have been initialized. By deriving your service class from **VISInit** and declaring it statically, you ensure that your service class instance will be properly initialized.

The VisiBroker ORB invokes the **VISInit::ORB_init** and **VISInit::BOA_init** whenever the application calls **CORBA::ORB_init** or **BOA_init** methods. By providing your own implementations of these methods, you may add any needed initialization that must be performed for your service.

Include file

Include the `vinit.h` file when you use this class.

VISInit constructors/destructors

```
VISInit();
```

This is the default constructor.

```
VISInit(CORBA::Long init_priority);
```

This constructor creates a **VISInit**-derived object with the specified priority, which determines when it will be initialized relative to other **VISInit**-derived objects.

Internal VisiBroker classes which need to be initialized before user-defined classes have a negative priority value. The lowest priority value currently used by VisiBroker internal classes is -10 to 10.

Note

You should set a priority value less than -10 if your class must be initialized before the VisiBroker internal classes.

If no priority value is specified, the default value is 0, which means that the class will be initialized after the internal VisiBroker classes.

Parameter	Description
<code>init_priority</code>	The initialization priority for this object. A negative priority value causes this class to be initialized earlier. A positive priority value causes this class to be initialized later.

```
virtual ~VISInit();  
This is the default destructor.
```

VISInit methods

```
virtual void ORB_init(int& argc, char * const *argv,  
CORBA::ORB_ptr orb);
```

This method will be called during VisiBroker ORB initialization. Your implementation should provide for the initialization of the client-side interceptor factory that you wish to use.

Parameter	Description
argc	The count of arguments.
argv	An array of argument pointers.
orb	The VisiBroker ORB being initialized.

```
virtual void ORB_initialized(CORBA::ORB_ptr orb);
```

This method will be called after the VisiBroker ORB is initialized. Your implementation should provide for the initialization of the client-side interceptor factory that you wish to use.

Parameter	Description
orb	The VisiBroker ORB being initialized.

```
virtual void BOA_init(int& argc, char * const *argv,  
CORBA::BOA_ptr boa);
```

This method will be called when the BOA is initialized. Your implementation should provide for the initialization of the server-side interceptor factory that you wish to use.

Parameter	Description
argc	The count of arguments.
argv	An array of argument pointers.
boa	The BOA being initialized.

```
virtual void ORB_shutdown()
```

This method will be called when the VisiBroker ORB is shut down.

Real-Time CORBA interfaces and classes

This section describes the Real-Time CORBA interfaces and classes supported by VisiBroker for C++.

Note

Before using these interfaces, read "Real-Time CORBA Extensions" in the *VisiBroker for C++ Developer's Guide* for descriptions and usage information on the supported extensions.

Introduction

Real-Time CORBA provides a set of APIs that support the development of predictable CORBA-based systems, through the control of the number and priority of threads involved in the execution of CORBA invocations.

The majority of the Real-Time CORBA API is specified in IDL, and is mapped to C++ according to the rules of the CORBA C++ language mapping. The Real-Time CORBA IDL is scoped within module RTCORBA, and hence the C++ class names are all prefixed `RTCORBA::`.

The following Real-Time CORBA interfaces and classes are described in the sections that follow:

- [RTCORBA::Current](#)
- [RTCORBA::Mutex](#)
- [RTCORBA::NativePriority](#)
- [RTCORBA::Priority](#)
- [RTCORBA::PriorityMapping](#)
- [RTCORBA::PriorityModel](#)
- [RTCORBA::PriorityModelPolicy](#)
- [RTCORBA::RTORB](#)
- [RTCORBA::ThreadpoolId](#)
- [RTCORBA::ThreadpoolPolicy](#)

Include file

To use any of the Real-Time CORBA features described in this chapter, the application should include the file `rtcorba.h`, which is one of the include files supplied with VisiBroker for C++.

RTCORBA::Current

```
class RTCORBA::Current : public virtual CORBA::Current,
    public virtual CORBA::LocalObject
    typedef RTCORBA::Current* Current_ptr
    class RTCORBA::Current_var
```

The class RTCORBA::Current provides methods that allow a Real-Time CORBA Priority value to be associated with the current thread of execution, and the reading of the Real-Time CORBA Priority value presently associated with the current thread.

When a Real-Time CORBA Priority value is associated with the current thread, that value is immediately used to set the Native Priority of the underlying thread. The Native Priority value to apply to the thread is obtained by means of the currently installed Priority Mapping.

Where the Client Propagated Priority Model is in use, the Priority associated with a thread also determines the priority of CORBA invocations made from that thread. For details, see "Real-Time CORBA Priority Models" in the *VisiBroker for C++ Developer's Guide*.

RTCORBA::Current is defined in IDL, as a locality constrained interface. Hence applications handle RTCORBA::Current by means of CORBA LocalObject References, using the C++ classes RTCORBA::Current_ptr and RTCORBA::Current_var.

See "[RTCORBA::Priority](#)" for more information.

RTCORBA::Current Creation and Destruction

RTCORBA::Current is a special interface. Applications need not be concerned by which instance of it they are dealing with. A reference to RTCORBA::Current is obtained through the resolve_initial_references method of RTCORBA::ORB, and is released in the normal way when it is no longer required. For details see "Real-Time CORBA Current" in *VisiBroker for C++ Developer's Guide*.

IDL definition

```
//Locality Constrained Object
local interface Current : CORBA::Current {
    attribute Priority base_priority;
};
```

RTCORBA::Current methods

```
void base_priority(Priority _val);
```

Associates the RTCORBA::Priority value _val with the current thread of execution.

Parameter	Description
_val	The Priority value to associate with the thread

```
Priority base_priority();
```

Gets the RTCORBA::Priority value associated with the current thread of execution.

RTCORBA::Mutex

```
class RTCORBA::Mutex :local interface Current :  
    CORBA::Current  
    typedef RTCORBA::Mutex* RTCORBA::Mutex_ptr  
    class RTCORBA::Mutex_var  
        class TimeBase {  
            typedef unsigned long long TimeT;  
        };
```

The interface RTCORBA::Mutex provides applications with a mutex synchronization primitive that is guaranteed to have the same priority inheritance properties as mutexes used internally by VisiBroker to protect ORB resources. For details, see "Real-Time CORBA Mutex API" in the *VisiBroker for C++ Developer's Guide*.

RTCORBA::Mutex is defined in IDL, as a locality constrained interface. Hence applications handle RTCORBA::Mutex instances by means of CORBA LocalObject References, using the C++ classes RTCORBA::Mutex_ptr and RTCORBA::Mutex_var. See "[RTCORBA::RTORB](#)" for more information.

Mutex Creation and Destruction

A new RTCORBA::Mutex is obtained using the `create_mutex` operation of the RTCORBA::RTORB interface. The new RTCORBA::Mutex is created in an unlocked state.

When the RTCORBA::Mutex is no longer needed, it is destroyed using the `destroy_mutex` operation of RTCORBA::RTORB. See "[RTCORBA::RTORB](#)" for details.

Note that if the RTCORBA::Mutex_var type is used in place of the RTCORBA::Mutex_ptr type, the reference is automatically released when the _var instance goes out of scope, but the RTCORBA::Mutex instance it refers to is not automatically destroyed. The RTCORBA::Mutex instance must still be destroyed with a call to `destroy_mutex`.

IDL definition

```
// Locality Constrained Object  
local interface Mutex {  
    void lock();  
    void unlock();  
    boolean try_lock ( in TimeBase::TimeT max_wait );  
};  
  
local interface RTORB {  
f  
    Mutex create_mutex();  
    void destroy_mutex( in Mutex the_mutex );  
f  
};  
  
// defined in TimeBase.idl  
module TimeBase {  
    typedef unsigned long long TimeT;  
};
```

RTCORBA::Mutex Methods

```
void lock();
```

Locks the RTCORBA::Mutex. When the RTCORBA::Mutex object is in the unlocked state, the first thread to call the `lock()` operation causes the Mutex object to change to the locked state. Subsequent threads that call the `lock()` operation while the Mutex object is still in the locked state will block until the owner thread unlocks it.

```
void unlock();
```

Unlocks the locked RTCORBA::Mutex.

```
CORBA::Boolean try_lock( const TimeBase::TimeT  
_max_wait );
```

Attempts to lock the RTCORBA::Mutex, waiting for a maximum of `_max_wait` amount of time. Returns true if the lock is successfully taken within the time, or false if it could not be taken before the time expired.

Parameter	Description
<code>_max_wait</code>	The maximum amount of time to wait for the lock, in 100-nanosecond ticks. A value of 0 means do not wait for the lock.

RTCORBA::NativePriority

```
typedef CORBA::Short RTCORBA::NativePriority
```

The type `RTCORBA::NativePriority` is used to represent priorities in the priority scheme of the particular Operating System that the Real-Time ORB is running on. Real-Time CORBA applications only use `RTCORBA::NativePriority` values in special circumstances:

- When defining a Priority Mapping. For details, see “[RTCORBA::PriorityMapping](#)”.
- When interacting directly with the Operating System, or with some other non-CORBA subsystem, that works in terms of Native Priorities. This should still be done by means of the installed Priority Mapping. For details, see “Using Native Priorities in VisiBroker Application Code” in the *VisiBroker for C++ Developer’s Guide*.

Normally, within a Real-Time CORBA application, priorities are expressed in terms of `RTCORBA::Priority` values.

IDL definition

```
typedef short NativePriority;
```

RTCORBA::Priority

```
typedef CORBA::Short RTCORBA::Priority
    static const Priority RTCORBA::minPriority; // 0
    static const Priority RTCORBA::maxPriority; // 32767
```

The type RTCORBA::Priority should be used to represent priority values in a Real-Time CORBA application. These values are mapped on to the Native Priority scheme of the particular Operating System that the application is running on by the currently installed Priority Mapping. For a detailed discussion of Real-Time CORBA Priority, see "Real-Time CORBA Priority" in the *VisiBroker for C++ Developer's Guide*.

The only time a Real-Time CORBA application should use Native Priority values is when interacting directly with the Operating System or some other non-CORBA subsystem. Even then, this should still be done using the installed Priority Mapping. For details see 'Using Native Priorities in VisiBroker Application Code' in the *VisiBroker for C++ Developer's Guide*.

RTCORBA::Priority values are in the range 0 to 32767. However, it is not expected that this full range of priorities will be used in a Real-Time CORBA system. Instead, the application system designer should decide on a suitable range of priorities for that system, and implement a Priority Mapping that only allows priority values in that range. For many applications the default valid range of 0 to 31 is acceptable, but there might still be reasons to override the default Priority Mapping. See "[RTCORBA::PriorityMapping](#)" for details.

IDL definition

```
typedef short Priority;
static const Priority minPriority; // 0
static const Priority maxPriority; // 32767
```

RTCORBA::PriorityMapping

```
class RTCORBA::PriorityMapping
```

The RTCORBA::PriorityMapping class facilitates the mapping of RTCORBA::Priority values to and from the Native Priority scheme of the Operating System the Real-Time ORB is running on. The ORB calls out to a Priority Mapping object whenever it needs to map a RTCORBA::Priority value to a RTCORBA::NativePriority value or vice versa.

A Real-Time CORBA application should describe its priorities in terms of RTCORBA::Priority values. However, the application might need to make explicit use of the installed Priority Mapping, in order to interact directly with the Operating System or some other non-CORBA subsystem. For details see "Using Native Priorities in VisiBroker Application Code" in the *VisiBroker for C++ Developer's Guide*.

The range of RTCORBA::Priority values supported by a Priority Mapping should always start from zero. The Real-Time ORB expects RTCORBA::Priority zero to be valid. Also, this convention makes integration of different Real-Time CORBA systems on the same node easier.

PriorityMapping Creation and Destruction

It is not necessary to create instances of a Priority Mapping in the code of a normal Real-Time CORBA application. The available Priority Mapping is automatically used by the ORB, and can be accessed by the application if necessary.

Exactly one Priority Mapping is 'installed' at any one time. A 'default' Priority Mapping is provided, which is installed by default. This Default Priority Mapping can be overridden by installing an application-implemented Priority Mapping object. The installation process is described in the section "Replacing the Default Priority Mapping" in the *VisiBroker for C++ Developer's Guide*.

IDL definition

```
// 'native' IDL type  
native PriorityMapping;
```

The RTCORBA::PriorityMapping IDL type is defined as a 'native' IDL type. This means that its mapping to different programming languages is defined on a per-language basis. The C++ class representing RTCORBA::PriorityMapping has the following declaration:

```
class PriorityMapping {  
public:  
    virtual CORBA::Boolean to_native(  
        RTCORBA::Priority corba_priority,  
        RTCORBA::NativePriority &native_priority )=0;  
    virtual CORBA::Boolean to_CORBA(  
        RTCORBA::NativePriority native_priority,  
        RTCORBA::Priority &corba_priority )=0;  
    virtual RTCORBA::Priority max_priority() = 0;  
    PriorityMapping();  
    virtual ~PriorityMapping() {}  
    static RTCORBA::PriorityMapping * instance();  
};
```

The purpose of each method is explained in the next section, "[PriorityMapping Methods](#)".

PriorityMapping Methods

```
static RTCORBA::PriorityMapping * instance();
```

This static method, implemented by VisiBroker for C++, can be used by Real-Time CORBA applications to access the currently installed Priority Mapping. For details see "Using Native Priorities in VisiBroker Application Code" in the *VisiBroker for C++ Developer's Guide*.

```
virtual RTCORBA::Priority max_priority() = 0;
```

This method returns the maximum Real-Time CORBA Priority value that is valid using this Priority Mapping. For example, if the installed Priority Mapping maps Real-Time CORBA Priorities in the range 0 to 31, the value 31 will be returned every time this method is called.

This method must be implemented when implementing a new Priority Mapping.

```

virtual CORBA::Boolean to_CORBA (
    RTCORBA::NativePriority native_priority,
    RTCORBA::Priority &corba_priority ) = 0;

```

This method maps a given Native Priority value, `native_priority`, to a Real-Time CORBA Priority value. If the Native Priority value is in the range supported by this Priority Mapping, the resultant Real-Time CORBA Priority value is stored in `corba_priority`, and a true value is returned. Otherwise `corba_priority` is not changed, and a false is returned.

This method must be implemented when implementing a new Priority Mapping.

Parameter	Description
<code>native_priority</code>	The Native Priority value to be mapped to a Real-Time CORBA Priority.
<code>corba_priority</code>	The variable to assign the mapped Real-Time CORBA Priority value to.

```

virtual CORBA::Boolean to_native (
    RTCORBA::Priority corba_priority,
    RTCORBA::NativePriority &native_priority ) = 0;

```

This method maps a given Real-Time CORBA Priority value, `corba_priority`, to a Native Priority value. If the Real-Time CORBA Priority value is in the range supported by this Priority Mapping, the resultant Native Priority value is stored in `native_priority`, and a true value is returned. Otherwise `native_priority` is not changed, and a false value is returned.

This method must be implemented when implementing a new Priority Mapping.

Parameter	Description
<code>corba_priority</code>	The Real-time CORBA Priority value to be mapped to a Native Priority.
<code>native_priority</code>	The variable to assign the mapped Native Priority value to.

RTCORBA::PriorityModel

```

enum RTCORBA::PriorityModel {
    CLIENT_PROPAGATED,
    SERVER_DECLARED
};

```

This enumeration specifies the two Real-Time CORBA Priority Models: Client Propagated Priority Model and Server Declared Priority Model. These are described in the section “Real-Time CORBA Priority Models” in the *VisiBroker for C++ Developer’s Guide*.

These enumeration values are used as values for a parameter to the `create_priority_model_policy` method of `RTCORBA::RTORB`. See “[RTCORBA::PriorityModelPolicy](#)” for details.

RTCORBA::PriorityModelPolicy

```
class RTCORBA::PriorityModelPolicy : public virtual
    CORBA::Policy, public virtual CORBA::LocalObject
```

An instance of this Real-Time Policy type is created by calling the `create_priority_model_policy` method of `RTCORBA::RTORB`. The Policy instance can then be used to configure a Real-Time POA at the time of its creation, by passing it into the `create_POA` method, as a member of the Policy List parameter.

See “[RTCORBA::RTORB](#)” and “[RTCORBA::PriorityModel](#)” for more information.

IDL definition

```
local interface PriorityModelPolicy : CORBA::Policy {
    readonly attribute PriorityModel priority_model;
    readonly attribute Priority server_priority;
};
```

RTCORBA::RTORB

```
class RTCORBA::RTORB : public virtual
    CORBA::LocalObject
    typedef RTCORBA::RTORB* RTCORBA::RTORB_ptr
    class RTCORBA::RTORB_var
```

The interface `RTCORBA::RTORB` provides methods for the management of Real-Time CORBA Threadpools and Mutexes, and to create instances of Real-Time CORBA Policies.

`RTCORBA::RTORB` is defined in IDL, as a locality constrained interface. Hence applications handle `RTCORBA::RTORB` by means of CORBA `LocalObject` References, using the C++ classes `RTCORBA::RTORB_ptr` and `RTCORBA::RTORB_var`.

Note

As stated in the [**VisiBroker for C++ Developer's Guide**](#), to support Real-Time CORBA Extensions the VisiBroker for C++ ORB has to operate in a special 'real-time compatible' mode, the behavior and semantics of which differ from the regular mode of operation. Since obtaining an "RTORB" reference automatically puts the ORB in this special mode, you should obtain an "RTORB" reference as early as possible in your application code to avoid any possible inconsistency in behavior.

See “[RTCORBA::Mutex](#)”, “[RTCORBA::Priority](#)”, “[RTCORBA::Threadpoold](#)”, and “[RTCORBA::ThreadpoolPolicy](#)”. For details on the use of Real-Time CORBA Threadpools, see “[Threadpools](#)” in the [**VisiBroker for C++ Developer's Guide**](#).

RTORB Creation and Destruction

The Real-Time ORB does not need to be explicitly initialized—it is initialized implicitly as part of the regular `CORBA::ORB_init` call.

To use the Real-Time ORB operations, the application must have a reference to the Real-Time ORB instance. This reference can be obtained any time after the call to `ORB_init`, and is obtained through the

resolve_initial_references operation on CORBA::ORB, with the object ID string "RTORB" as the parameter. For details, see "Real-Time CORBA ORB" in the *VisiBroker for C++ Developer's Guide*.

IDL definition

```
// locality constrained interface
local interface RTORB {
    Mutex create_mutex();
    void destroy_mutex( in Mutex the_mutex );

    exception InvalidThreadpool {};

    ThreadpoolId create_threadpool (
        in unsigned long stacksize,
        in unsigned long static_threads,
        in unsigned long dynamic_threads,
        in Priority default_priority,
        in boolean allow_request_buffering,
        in unsigned long max_buffered_requests,
        in unsigned long max_request_buffer_size );

    void destroy_threadpool( in ThreadpoolId threadpool )
        raises (InvalidThreadpool);

    void threadpool_idle_time( in ThreadpoolId threadpool,
        in unsigned long seconds )
        raises (InvalidThreadpool);

    PriorityModelPolicy create_priority_model_policy(
        in PriorityModel priority_model,
        in Priority server_priority );

    ThreadpoolPolicy create_threadpool_policy(
        in ThreadpoolId threadpool );
};
```

RTORB Methods

`Mutex_ptr create_mutex();`

Creates a new Real-Time CORBA Mutex and returns a reference to it.

`void destroy_mutex(Mutex_ptr _the_mutex);`

Destroys a Real-Time CORBA Mutex.

Parameter	Description
<code>_the_mutex</code>	Reference of the Mutex to destroy.

```

ThreadpoolId create_threadpool(  

    CORBA::ULong _stacksize,  

    CORBA::ULong _static_threads,  

    CORBA::ULong _dynamic_threads,  

    Priority _default_priority,  

    CORBA::Boolean _allow_request_buffering = 0,  

    CORBA::ULong _max_buffered_requests = 0,  

    CORBA::ULong _max_request_buffer_size = 0 );

```

Creates a new Real-Time CORBA Threadpool with the specified configuration, and returns a RTCORBA::ThreadpoolId for it.

Parameter	Description
_stacksize	Stacksize, in bytes, for each thread in the Threadpool.
_static_threads	Number of threads to create at the time of Threadpool creation. This value can be zero, as long as _dynamic_threads is non-zero.
_dynamic_threads	Number of extra threads that can be created, if all the statically created threads are in use and more threads are required. This value can be zero (so that no more threads can be dynamically created), as long as _static_threads is non-zero.
_allow_request_buffering	Boolean flag to enable request buffering when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.
_max_buffered_requests	Maximum number of requests to buffer when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.
_max_request_buffer_size	Maximum amount of data to buffer, in bytes, when all threads are in use. Not supported by VisiBroker for C++. The value of this parameter is ignored.

```
void destroy_threadpool( ThreadpoolId _threadpool );
```

Destroys a Real-Time CORBA Threadpool. The Threadpool must not be in use by any Object Adapter, or the operation will fail, and a CORBA system exception is raised.

Parameter	Description
_threadpool	The ThreadpoolId of the Threadpool to destroy.

```

void threadpool_idle_time(  

    ThreadpoolId _threadpool,  

    CORBA::ULong _seconds );

```

Sets the time, in seconds, that dynamically allocated threads remain idle before they are garbage collected. Configured on a per-Threadpool basis. The default is to garbage collect dynamically allocated threads after 300 seconds.

This method is a proprietary VisiBroker extension.

Parameter	Description
_threadpool	The ThreadpoolId of the Threadpool to set the Idle Time for.
_seconds	The maximum number of seconds that a dynamically allocated thread can be idle in this Threadpool before it is destroyed. Statically allocated threads are not destroyed.

```
PriorityModelPolicy create_priority_model_policy(  
    in PriorityModel _priority_model,  
    in Priority _server_priority );
```

Creates an instance of the RTCORBA::PriorityModelPolicy policy object, for use in configuring one or more Real-Time POAs. See “[RTCORBA::PriorityModel](#)” and “[RTCORBA::PriorityModelPolicy](#)”.

Parameter	Description
_priority_model	Either RTCORBA::SERVER_DECLARED for the Server Declared Priority Model, or RTCORBA::CLIENT_PROPAGATED for the Client Priority Propagation Model.
_server_priority	In the Server Model, the Real-Time CORBA Priority that invocations on objects activated on this POA will be executed at, provided a Priority value is not associated with the individual object at the time of activation. In the Client Model, the Real-Time CORBA Priority that invocations on objects activated on this POA will be executed at if they come from a non-Real-Time CORBA client or a Real-Time CORBA client that has not specified a Real-Time CORBA Priority on RTCORBA::Current before making the invocation.

```
ThreadpoolPolicy create_threadpool_policy(  
    in ThreadpoolId _threadpool );
```

Creates an instance of the RTCORBA::ThreadpoolPolicy policy object, for use in configuring one or more Real-Time POAs.

Parameter	Description
_threadpool	The ThreadpoolId of the Threadpool to associate POA with.

RTCORBA::ThreadpoolId

```
typedef CORBA::ULong RTCORBA::ThreadpoolId
```

Values of the type RTCORBA::ThreadpoolId are used to identify Real-Time CORBA Thread-pools. A value of this type is returned from the `create_threadpool` method of RTCORBA::RTORB.

The ID can be used to initialize an instance of a Threadpool Policy, which in turn can be passed in to a call to `create_POA`, as a member of the `PolicyList` parameter, to configure a Real-Time POA. For details, see “[RTCORBA::RTORB](#)”, “[RTCORBA::ThreadpoolPolicy](#)”, and the section “Association of an Object Adapter with a Threadpool” in the [VisiBroker for C++ Developer's Guide](#).

IDL definition

```
typedef unsigned long ThreadpoolId;
```

RTCORBA::ThreadpoolPolicy

```
class RTCORBA::ThreadpoolPolicy : public virtual  
    CORBA::Policy, public virtual CORBA::LocalObject
```

An instance of this Real-Time Policy type is created by calling the `create_threadpool_policy` method of `RTCORBA::RTORB`. The Policy instance can then be used to configure a Real-Time POA at the time of its creation, by passing it into the `create_POA` method, as a member of the Policy List parameter. See “[RTCORBA::RTORB](#)”, “[RTCORBA::Threadpoold](#)”, and the section “Association of an Object Adapter with a Threadpool” in the *VisiBroker for C++ Developer's Guide* for more information.

IDL definition

```
local interface ThreadpoolPolicy : CORBA::Policy {  
    readonly attribute ThreadpoolId threadpool;  
};
```

Pluggable Transport Interface Classes

This chapter describes the classes of the Pluggable Transport Interface provided by VisiBroker for C++. For information on how to implement support for a transport protocol via the VisiBroker Pluggable Transport Interface, see the chapter "VisiBroker Pluggable Transport Interface" in the *VisiBroker C++ Developer's Guide*.

VISPTransConnection

This class is the abstract base class for a connection class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. Each instance of the derived class will represent a single connection between a server and a client. VisiBroker will request instances of this class be created (via the corresponding factory class, see "[virtual CORBA::Boolean waitNextMessage\(CORBA::ULong _timeout\) = 0;](#)") on both the client and server side of the ORB, whenever a new connection is required.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransConnection methods

```
virtual void close() = 0;
```

To be implemented by the derived connection class. This method closes the connection in an orderly fashion. This method must be able to close the connection from either the client- or the server-side of a connection.

```
virtual void connect(CORBA::ULongLong _timeout) = 0;
```

To be implemented by the derived connection class. This method will be called by the client-side ORB, and must communicate with the remote peer's 'Listener' instance to setup a new connection on the server-side. The function does not return any error code, but should throw exceptions if any transport layer errors occur. Any exception may be thrown, including a CORBA User Exception, as the exception will be thrown back to the client CORBA application. `CORBA::TRANSIENT` is one possible exception that could be thrown.

The timeout value is in specified in milliseconds. A value of 0 means no timeout (block forever), and this is the default value, which is used unless the timeout is set through the VisiBroker QoS policy system. If the transport does not support timeouts on connect, it still can be used successfully. In this case the connect call must always block until the connection is established or has failed.

Parameter	Description
<code>_timeout</code>	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever).

```
virtual void flush() = 0;
```

To be implemented by the derived connection class. If this transport buffers data, this method should immediately send all data buffered for output, and block until the data is sent. Otherwise, there is nothing to be done and it can return immediately.

```
virtual IOP::ProfileValue_ptr getPeerProfile() = 0;
```

To be implemented by the derived connection class. This method should return a copy of the Profile describing the peer endpoint used in this connection. The copy must be created on the heap and the caller is responsible for releasing the used memory. The Profile does not describe the actual connection for this instance, but the Profile of the 'Listener' endpoint used during the 'connect' call.

```
virtual CORBA::Long id() = 0;
```

To be implemented by the derived connection class. This method must return a unique number for each connection instance. The ID only needs to be unique for this transport. It is used to lookup/locate a connection instance during request dispatching for this transport.

```
virtual CORBA::Boolean isBridgeSignalling() = 0;
```

To be implemented by the derived connection class. This method is used to indicate to the ORB which worker thread 'cooling' strategy is to be used. If the method returns 0 (FALSE), it means that the protocol plug-in itself is going to handle the re-reading of the connection after a request has been read. This is only possible if the plug-in is capable of doing a blocking read with timeout on the protocol endpoint. If it cannot or chooses not to, this method should return 1 (TRUE), and the transport bridge will notify the thread if another request becomes available or the when the timeout is reached. Note that thread cooling only occurs if a cooling time is configured for that protocol instance.

```
virtual CORBA::Boolean isConnected() = 0;
```

To be implemented by the derived connection class. This method should return 1 (TRUE), if the remote peer is still connected. If the connection was closed by the peer or any error condition exists that prevents the use of this connection, it must return 0 (FALSE).

```
virtual CORBA::Boolean isDataAvailable() = 0;
```

To be implemented by the derived connection class. This method should return 1 (TRUE), if data is ready to be read from the connection. Otherwise, it should return 0 (FALSE).

```
virtual CORBA::Boolean no_callback() = 0;
```

To be implemented by the derived connection class. This method indicates whether a connection of this transport can be used to reverse the client/server setup and call back to a servant in the client code. It should return 0 (FALSE) if it can not, which will cause the ORB to create a new connection for this kind of call, or 1 (TRUE) if it can.

This feature is provided to support Bi-Directional IIOP, that was introduced in GIOP-1.2. See the CORBA specification for details.

```
virtual void read(CORBA::Boolean _isFirst,  
CORBA::Boolean _isLast, char* _data, CORBA::ULong
```

```
_offset, CORBA::ULong _length, CORBA::ULongLong
_timeout) = 0;
```

To be implemented by the derived connection class. This method reads data from the connection. It does not return any error code, but must signal transport related errors by throwing exceptions. The arguments describe a byte array with a given length that needs to be filled. This function must either fill the complete byte array successfully, timeout, or throw an exception.

The timeout parameter's value defaults to 0 unless the user sets it through the VisiBroker QoS policies. A value of 0 indicates no timeout, and hence that the read should block forever waiting for data. Therefore, if this transport does not support timeouts on read/write, it still can be used successfully. In this case the read call must always block until all data has arrived.

Parameter	Description
_isFirst	TRUE if this is the first time data is being read from the connection.
_isLast	TRUE if this is the last time data is being read from the connection.
_data	Byte array to read data into.
_offset	Offset into the array at which to start storing the read data.
_length	The number of bytes of data to be read.
_timeout	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever)

```
virtual void setupProfile(const char* prefix,
    VISPTransProfileBase_ptr peer) = 0;
```

To be implemented by the derived connection class. This method is used to tell a newly created client-side connection object what peer it should try to connect to in later steps (when `connect()` is called.) The given `VISPTransProfileBase_ptr` base class should be cast to the Profile class type of the particular transport and all member data in the connection should be initialized from that instance. A prefix string is also passed, for property lookup, in case additional property parameters need to be read.

Parameter	Description
prefix	String prefix of the form " <code>vbroker.se.<SE_name>.scm.<SCM_name></code> " that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure this instance.
peer	Profile for the Listening endpoint that this connection will connect to. Given as an instance of this protocol's Profile class, passed as a pointer to the base <code>VISPTransProfile</code> class.

```
virtual CORBA::Boolean waitNextMessage(CORBA::ULong
_timeout) = 0;
```

To be implemented by the derived connection class. This method should block the calling thread until either data has arrived on this connection or the given timeout (in milliseconds) has expired. It should return 1 (TRUE) if data is available, or 0 (FALSE) if not. Note that a value of 0 for the `_timeout` parameter should never occur (as in this case the ORB should not

call this method). Therefore receiving this value should be handled as an error, perhaps by logging an error message.

Parameter	Description
_timeout	Maximum amount of time to wait for a message (in seconds). 0 means wait forever.

```
virtual void write(CORBA::Boolean _isFirst,
    CORBA::Boolean _isLast, char* _data, CORBA::ULong
    _offset, CORBA::ULong _length, CORBA::ULongLong
    _timeout) = 0;
```

To be implemented by the derived connection class. This method sends data through the connection to the remote peer. It does not return any error code, but must signal transport related errors by throwing exceptions. The arguments describe a byte array with a given length that needs to be sent. This function must either send the complete byte array successfully, timeout, or throw an exception. The timeout parameter's value defaults to 0 unless the user sets it through the VisiBroker QoS policies. A value of 0 indicates no timeout, and hence that the write should block forever waiting for data. Therefore, if this transport does not support timeouts on read/write, it still can be used successfully. In this case the write call must always block until all data has arrived.

Parameter	Description
_isFirst	TRUE if this is the first time data is being sent through the connection.
_isLast	TRUE if this is the last time data is being resent through the connection.
_data	Byte array of data that needs to be sent.
_offset	Offset into the array at which to start storing the read data.
_length	The number of bytes of data to be sent.
_timeout	Timeout value to use, in milliseconds. 0 indicates no timeout (block forever)

VISPTransConnectionFactory

This class is the abstract base class for a connection factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the “[VISPTransRegistrar](#)” class. The ORB calls the connection factory object to create instances of the connection class of the associated transport. The connection class is the corresponding class derived from class `VISPTransConnection`.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransConnectionFactory methods

```
VISPTransConnection_ptr create(const char* prefix) = 0;
```

To be implemented by the derived connection factory class. This method creates a new instance of the corresponding connection class and returns

the pointer to it cast to the base class type. The caller is responsible for the destruction of the instance when it is no longer required.

Parameter	Description
prefix	String prefix of the form "vbroker.se.<SE_name>.scm.<SCM_name>" that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure the connection factory.

VISPTransListener

This class is the abstract base class for a listener factory that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. Instances of the derived class are created each time a Server Engine is created that includes Server Connection Managers ('SCMs') that specify the particular transport protocol. One instance is created per SCM instance that specifies the protocol. The listener instances are used by the server-side ORB to wait for incoming connections and requests from clients. New connections and requests on existing connections are signaled by the listener to the ORB via the Pluggable Transport Interface's Bridge class (see "["VISPTransBridge"](#)"). When a request is received on an existing connection, the connection goes through a 'Dispatch Cycle'. The Dispatch Cycle starts when the connection delivers data to the transport layer. In this initial state, the arrival of this data must be signaled to the ORB via the Bridge and then the Listener ignores the connection until the Dispatch process is completed (in the mean time, the connection is said to be in the 'dispatch state'). The connection is returned to the initial state when the ORB makes a call to the Listener's `completedData()` method. During the dispatch state the ORB will read directly from the connection until all requests are exhausted, avoiding any overhead incurred by the Bridge-Listener communication. In most cases, the transport layer uses blocking calls that wait for new connections. In order to handle this situation, the Listener should be made a subclass of the class `VISThread` and start a separate thread of execution that can be blocked without holding up the whole ORB.

Include file

The `vptrans.h` file should be included to use this class.

VISPTransListener methods

```
virtual void completedData(CORBA::Long id) = 0;
```

To be implemented by the derived listener class. This method is called when the ORB has completed reading a request from the connection with the given id and wants the Listener once again to signal any new incoming requests on that connection (via the Bridge).

Parameter	Description
<code>id</code>	Id of the connection that may once again be listened on.

```
virtual void destroy() = 0;
```

To be implemented by the derived listener class. This method instructs the Listener instance to tear down its endpoint and close all related active connections.

```
virtual IOP::ProfileValue_ptr getListenerProfile() = 0;
```

To be implemented by the derived listener class. This method should return the Profile describing the Listener instance's endpoint on this transport. The returned Profile should be a copy on the heap and the caller (the ORB) takes over memory management of it.

```
virtual CORBA::Boolean isDataAvailable(CORBA::Long id)  
= 0;
```

To be implemented by the derived connection factory class. This method should return 1 (TRUE), if the connection with the given Id has data ready to be read. Returns 0 (FALSE) otherwise. Normally the call should just be forwarded to the transport layer to find out.

Parameter	Description
id	Id of the connection that should be queried to see if data is available.

```
virtual void setBridge(VISPTransBridge* up) = 0;
```

To be implemented by the derived listener class. This method establishes the 'link' to the Pluggable Transport Bridge instance to be used by this Listener instance. The pointer it passes to the Listener should be stored to allow 'upcalls' to be made into ORB when necessary.

Parameter	Description
up	Pointer to the Pluggable Transport Bridge instance that the Listener instance should use to communicate with the ORB.

VISPTransListenerFactory

This class is the abstract base class for a listener factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the [VISPTransRegistrar](#) class. The ORB calls this object to create instances of the listener class of the associated transport. The listener class is the corresponding class derived from class [VISPTransListener](#), as described in "[VISPTransListener](#)".

Include file

The `vptrans.h` file should be included to use this class.

VISPTransListenerFactory methods

```
VISPTransListener_ptr create(const char* propPrefix) =  
0;
```

To be implemented by the derived listener factory class. This method creates a new instance of the corresponding listener class and returns the

pointer to it cast to the base class type. The caller (the ORB) is responsible for the destruction of the instance when it is no longer required.

Parameter	Description
propPrefix	String prefix of the form "vbroker.se.<SE_name>.scm.<SCM_name>" that the method can use to read any protocol-specific VisiBroker properties that may have been set to configure the listener instance or the particular listener instance that is being created. Note that the factory can pass the prefix into the constructor of the listener instance it is creating, to allow it to read properties itself. This would require the derived listener class to have a constructor that takes the prefix as a parameter.

VISPTransProfileBase

```
class VISPTransProfileBase : public
    GIOP::ProfileBodyValue, public
    CORBA_DefaultValueRefCountBase
```

This class is the abstract base class for a Profile class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. This class provides the functionality to convert between a transport specific endpoint description and an CORBA IOP based IOR that can be exchanged with other CORBA implementations. It is also used during the process of binding a client to a server, by passing a ProfileValue to a 'parsing' function that has to return TRUE or FALSE, to determine whether a particular IOR is usable for this transport or not. An instance of the derived Profile class is frequently passed to functions via a pointer to its base class type. In order to support safe runtime downcasting with any C++ compiler, a '_downcast' function must be provided that can test if the cast is legal or not.

Include file

The vptrans.h file should be included to use this class.

VISPTransProfileBase methods

```
static GIOP::ObjectKey* convert(const
    PortableServer::ObjectId& seq) ;
```

Converts octet sequence representation of an Object Key into the in-memory representation.

Parameter	Description
seq	Octet sequence version of Object Key, to be converted into in-memory representation.

```
void object_key(GIOP::ObjectKey_ptr k) ;
```

Set the Object Key for this Profile instance.

Parameter	Description
k	Object key

```
GIOP::ObjectKey_var object_key() const;  
Get the Object Key for this Profile instance.
```

```
void version(const GIOP::Version& v);  
Set the GIOP version for this Profile.
```

Parameter	Description
v	GIOP Version

```
GIOP::Version& version();  
Get the GIOP version of this Profile.
```

```
const GIOP::Version& version() const;  
Get the GIOP version of this Profile.
```

```
static const VISValueInfo& _info();  
Get the VisiBroker ValueInfo for this Profile type.
```

VIСПTransProfileBase members

```
static const VISValueInfo& _stat_info;  
Stores the VisiBroker ValueInfo for this particular Profile type.
```

VIСПTransProfileBase base class methods

```
IOP::ProfileValue_ptr copy()
```

To be implemented by the derived listener factory class. This method should make an exact copy on the free store and return a pointer to it. It is good coding practice to use the copy constructor inside of this function.

```
CORBA::Boolean matchesTemplate(IOP::ProfileValue_ptr  
body);
```

To be implemented by the derived Profile class. This method should return 1 (TRUE) if there is an IOR in the given data, that can be used to connect through this transport. Otherwise return 0 (FALSE).

Parameter	Description
body	Profile to be checked, to see if it can be used by this transport.

```
IOP::ProfileId tag()
```

To be implemented by the derived Profile class. This method should return the unique tag value for this Profile.

```
IOP::TaggedProfile* toTaggedProfile();
```

To be implemented by the derived Profile class. This method should return a tagged (stringified) Profile instance created with the values read from this instance's member data.

```
static VISPTransProfileBase*
    _downcast(CORBA::ValueBase* vbptr);
```

To be implemented by the derived Profile class. Function to downcast a base class pointer to an instance of this Profile class.

Parameter	Description
vbptr	Profile instance passed as base Value type pointer.

```
virtual void* _safe_downcast(const VISValueInfo &info)
const;
```

To be implemented by the derived listener factory class. Virtual method called by ORB during downcast, to check type info data.

Parameter	Description
info	VisiBroker Value Info for this Profile type.

VISPTransProfileFactory

This class is the abstract base class for a Profile factory class that must be implemented for each transport protocol that is to be plugged in to VisiBroker, to allow VisiBroker to work with that particular transport protocol. A singleton instance of the derived class is registered with VisiBroker, via the VISPTransRegistrar class. The ORB calls this object to create instances of the Profile class of the associated transport. The Profile class is the corresponding class derived from class VISPTransProfileBase, as described in “[VISPTransProfileBase](#)”.

Include file

The vptrans.h file should be included to use this class.

VISPTransProfileFactory methods

```
IOP::ProfileValue_ptr create(const IOP::TaggedProfile&
    profile)
```

Read the tagged IOR and create a Profile describing a Listener endpoint.

Parameter	Description
profile	CDR encoded IOR to be read.

```
CORBA::ULong hash(VISPTransProfileBase_ptr prof);
```

Support the optimized storage of profiles in a hashed lookup table by calculating a hash number for the given instance. Return 0 if you do not provide hash values.

Parameter	Description
prof	Profile instance to produce hash value for.

```
IOP::ProfileId getTag();
```

Return the unique Profile Id tag for the type of Profile created by this factory.

VISPTransBridge

This class provides a generic interface between the transport classes and the ORB. It provides methods to signal various events occurring in the transport layer.

Include file

The vptrans.h file should be included to use this class.

VISPTransBridge methods

`CORBA::Boolean addInput(VISPTransConnection_ptr con);`

Send a connection request to the ORB through the bridge, by passing a pointer to the Connection instance representing the Listener endpoint. The returned flag signals whether the ORB has accepted the new connection (returns 1 (TRUE)) or refused it (returns 0 (FALSE)). The latter might happen due to resource constraints or due to a restriction on connections (set up through the property system).

Members	Description
con	Connection object representing the Listener endpoint wish to connect to.

`void signalDataAvailable(CORBA::Long conId);`

Passes the connection id to the ORB of a connection that just got new data from the transport layer. This will start the dispatch cycle for incoming requests.

Members	Description
conId	Connection Id of connection want to indicate data is available on

`void closedByPeer(CORBA::Long conId);`

Tell the ORB that the connection with the given id was closed by the remote peer.

Members	Description
conId	Connection Id of connection want to indicate was closed by the remote peer.

VISPTransRegistrar

This class must be used to register a new transport with the ORB. The protocol name string given during registration is used as identifier of this transport and must be unique in the scope of that ORB. It is also used as a prefix in the name string of properties related to this transport.

Include file

The vptrans.h file should be included to use this class.

VISPTransRegistrar methods

```
static void addTransport(const char* protocolName,
    VISPTransConnectionFactory* connFac,
    VISPTransListenerFactory* listFac,
    VISPTransProfileFactory* profFac);
```

Register the protocol name string and the three Factory instances used to create specific classes for this transport. This method is static and can therefore be called at any time during the initialization of the ORB.

Members	Description
protocolName	Name to be used to identify this transport protocol.
connFac	Pointer to singleton instance of connection factory.
listFac	Pointer to singleton instance of Listener factory.
profFac	Pointer to singleton instance of Profile factory

VisiBroker for C++ Logging

This section describes the classes that support VisiBroker for C++ logging.

VISDLoggerMgr

This class is a bootstrap class into the functionality provided by the logging library vdlog.

Include file

Include the vdlog.h file when you use this class.

VISDLoggerMgr methods

`static VISDLoggerMgr_ptr instance();`

Static function to access a singleton instance of VISDLoggerMgr.

`CORBA::Boolean global_log_enabled();`

Returns true if the global log switch is enabled, else false.

`void global_log_enabled(CORBA::Boolean b);`

Setter method for the global log level switch.

Parameter	Description
b	boolean value to enable or disable the global log level switch

`VISDLogLevel::Level global_log_level();`

Returns the current global log level (verbosity) setting on the log manager.

`void global_log_level(VISDLogLevel::Level l);`

Setter for the global log level on the log manager.

Parameter	Description
l	global verbosity setting

`VISDLogger_ptr get_default_logger();`

Returns the default logger. If not created, creates and returns. The name of the returned logger is "default".

```
VISDLogger_ptr get_logger(const char* name,
    VISDAppender_ptr* apps = NULL, CORBA::Short num_apps
    = 0);
```

Creates (if not created) and returns a logger with the given name.

Parameter	Description
name	input name of the logger
apps	pointer to an array of appender pointers indicating an initial list of appender for the logger
num_apps	number of appenders in the array of appender pointer

```
void register_app_factory(VISDAppenderFactory* fac);
```

API for custom appender factories to register themselves with the logger framework. Factory will be added to a dictionary of appender factories indexed by its name. If a factory is not registered with the framework, then an instance of its type cannot be created.

Parameter	Description
fac	appender factory to be registered

```
VISDAppender_ptr create_app(const char* logger_name,
    VISDConfig::LogAppenderConfig_ptr p);
```

API to create an appender for the logger specified by its name using the configuration information pointed.

Parameter	Description
logger_name	name of the logger for which the appender instance is to be created
p	pointer to the logger appender instance configuration

```
void register_lyt_factory(VISDLayoutFactory* fact);
```

API for custom layout factories to register themselves with the logger framework.

Parameter	Description
fact	pointer to the implemented layout factory to be registered

```
VISDLayout_ptr create_lyt(const char* logger_name,
    VISDConfig::LogAppenderConfig_ptr p);
```

API to create a layout instance.

Parameter	Description
logger_name	name of the logger in which the appender instance is associated which needs to use the layout
p	pointer to the logger appender instance configuration

VI SDLogger

Class providing the logging interface.

Include file

Include the vdlog.h file when you use this class.

VI SDLogger methods

```
const char* name() const;
```

Returns the name of the logger object.

```
void log(VISDLogLevel::Level level, const char*
          component, const char* message, const char
          *sourcefile = NULL, CORBA::ULong linenum = 0, const
          void *bindata = NULL, size_t binsize = 0)
```

API to log messages.

Parameter	Description
level	log level of the logged message
component	source name from where the message is being logged. The source name is the logical module name that can be useful during filtering
message	logged message data
sourcefile	source file name from where the message is being logged
linenum	source file line number from where the message is being logged
bindata	binary data pointer
binsize	size of any binary data

VI SDAppenderFactory

Interface for appender factory implementations to implement. The logger framework calls on this interface for appender instance creation.

Include file

Include the vdlog.h file when you use this class.

VI SDAppenderFactory methods

```
virtual const char* type_name() = 0;
```

This method is invoked by the logger framework when it needs to know the type of the factory. For example, when a factory registers itself with the logger manager, this API is called to get the type name. The type name identifies the type of destination to which its appenders will forward the logger. Type names "stdout", "rolling" and others as mentioned in the developer guide are restricted from usage. Should return back a unique type name for the appender type.

```

virtual VISDAppender_ptr create(const char*
    logger_name, VISDConfig::LogAppenderConfig_ptr p) =
    0;

```

This method is invoked by the logger framework when it needs to create an instance of the appender supported by this factory. The return value should be an instance of desired appender.

Parameter	Description
logger_name	name of the logger on which the appender instance is to be associated with
p	pointer to the logger's appender instance configuration.

```
virtual void destroy(VISDAppender_ptr p) = 0;
```

This method is invoked by the logger framework when it is done with using the appender instance. The API is supposed to remove all resources dedicated to the appender instance when it was created.

Parameter	Description
p	Appender instance pointer that is to be destroyed

VISDAppender

```
class VISDAppender : public VISResource
```

Interface providing the appender interface. The logger object uses this interface to log to specific destinations.

Include file

Include the vdlog.h file when you use this class.

VISDAppender methods

```
virtual VISDAppenderFactory* factory() = 0;
```

Should return the associated factory object which created this appender instance.

```
virtual CORBA::Boolean append(const VISDLogRecord&
    record) = 0;
```

API used by the logger to forward the log message to a specific destination. The log record abstracts the complete log message. On successful completion of forwarding, the API should return TRUE.

Parameter	Description
record	log record to be appended to the destination

```
virtual CORBA::Boolean ORB_initialized(void* orb_ptr) =
    0;
```

This is a notification from the ORB that it has initialized. If an appender is going to use any of the ORB functionality, then it needs to wait for this notification and return back TRUE. Otherwise, it should return back FALSE.

After this notification, the appender can start using any of the ORB interfaces.

Parameter	Description
orb_ptr	reference to the ORB

```
virtual void ORB_shutdown() = 0;
```

This is a notification from the ORB that it is shutting down. If the appender is using any ORB functionality, then it needs to stop using that after this notification.

VISLayoutFactory

Interface for layout factory implementations to implement. The logger framework calls on this interface for layout instance creation.

Include file

Include the `vdlog.h` file when you use this class.

VISLayoutFactory methods

```
virtual const char* type_name() = 0;
```

Returns the type name of the layout that this factory will create.

```
virtual VISLayout_ptr create(const char* logger_name,  
    VISDConfig::LogAppenderConfig_ptr p) = 0;
```

Should creates a layout instance. This API is called by the logger framework when an instance of the layout is desired.

Parameter	Description
logger_name	name of the logger whose associated appender instance needs this layout instance
p	pointer to the logger's appender instance configuration.

```
virtual void destroy(VISLayout_ptr layout) = 0;
```

Framework calls this API when it is done with usage of the layout and needs to factory to destroy the instance.

Parameter	Description
layout	pointer to layout instance which needs to be destroyed

VISLayout

```
class VISLayout : public VISResource
```

Interface which all layout instances should implement. Appenders which desire to format the log message before outputting to the desired destination will make use of this interface.

Include file

Include the vdlog.h file when you use this class.

VISDLayout methods

```
virtual VISDLayoutFactory* factory() = 0;
```

Should return the factory of the layout instance that created it.

```
virtual void format(const VISDLogRecord& record, char*
buf, CORBA::ULong buf_size, CORBA::String_var&
other_buf) = 0;
```

API that is called by the appender instances for formatting the log record. The appender allocates buffer and sends the buffer into this API and expects the layout to format the message and set in this buffer. However, if the layout wants more memory than that has been sent to it by the appender, then it can itself allocate memory and make use of other_buf.

Parameter	Description
record	log record containing the log message
buf	memory buffer sent by the appender onto which the layout can set the formatted message
buf_size	size of the memory buffer sent in by the appender
other_buffer	If the layout needs more memory than that sent by the appender, then it can allocate memory into this buffer and set the formatted text into it.

VISDConfig

Namespace class for configuration structures.

Include file

Include the vdlog.h file when you use this class.

LogAppenderConfig structure

```
struct LogAppenderConfig {
    CORBA::String_var appender_name;
    CORBA::String_var appender_type;
    CORBA::String_var layout_type;
};

typedef LogAppenderConfig* LogAppenderConfig_ptr;
```

This structure contains a single appender instance configuration on a logger. This is filled and passed to the factory interfaces by the logger framework after reading from the configurations.

Mambers	Description
appender_name	Name of the appender instance configured on the logger

Members	Description
appender_type	Type name of the appender instance. This implies which appender factory needs to be used
layout_type	Type name of the layout instance desired. Again this implies which layout factory should be used to obtain layout instance.

VISDLogRecord

Class abstracting a log message. Apart from the actual log message, it also captures various other states such as thread id, timestamp etc.parameter.

Include file

Include the vdlog.h file when you use this class.

VISDLogRecord methods

CORBA::Timestamp **get_timestamp()** const;

Returns the timestamp of the log record.

CORBA::ULong **get_seq_number()** const;

Returns a sequence number if many log records are logged at the same time interval.

CORBA::ULong **get_process_id()** const;

Returns the process id.

CORBA::ULong **get_thread_id()** const;

Returns the thread id of the thread that logged this message.

const char* **get_thread_name()** const;

If the thread is named, then it returns the thread name.

const char* **get_logger_name()** const;

Returns the logger object's name.

VISDLogLevel::Level **get_log_level()** const;

Returns the verbosity of the logged message.

const char* **get_component_name()** const;

Returns the source name of the source that logged the message.

const char* **get_filename()** const;

Returns the name of the file that logged the message.

CORBA::ULong **get_line_number()** const;

Returns the line number in the file from where the log message is emanating.

```
const char* get_message() const;  
This is the actual logged message.  
  
const unsigned char* get_bindata() const;  
Returns any binary data that is piggybacking on the log record.  
  
size_t get_binsize() const;  
Returns the size of the binary data.
```

VISDLogLevel

Class enclosing verbosity enumeration Level.

Include file

Include the vdlog.h file when you use this class.

Level enumeration

```
enum Level {  
    OFF_ = 1000,  
    EMERG_ = 800,  
    EXCEP_ = 800,  
    FATAL_ = 800,  
    ALERT_ = 700,  
    CRIT_ = 600,  
    ERROR_ = 500,  
    WARN_ = 400,  
    NOTICE_ = 300,  
    INFO_ = 200,  
    DEBUG_ = 100,  
    ALL_ = 0,  
    DEFAULT_ = -1  
};
```

Index

Symbols

_POA class 6
tie class 6
_var class 6
... ellipsis 2
symbols
 square brackets 2
| vertical bar 2

A

accessing
 system exceptions 62
 the interface repository 107
 user exceptions 62
ActiveObjectLifeCycleInterceptor
 class 246
ActiveObjectLifeCycleInterceptorManager
 class 247
Adapter activators 7
AdaptorActivator
 methods 7
Agent
 methods 274
agent class 273
AliasDef 81
 class 81
 methods 81
all_repository_ids 274
Any 49, 65
 class 49
 extraction operators 50
 initialization operators 50
 methods 49
arguments
 -ORBId 233
 -ORBServerId 233
ArrayDef 81
 class 81
 methods 81
AttributeDef 82
 class 82
AttributeDescription 83
 class 83
AttributeMode 83
 class 83

B

BAD_INV_ORDER
 ClientRequestInfo 211
 Current methods 217
 ORBInitInfo 225
 ServerRequestInfo 232
BAD_PARAM
 ClientRequestInfo 211
 IORInfo 220
Basic Object Adaptor (see BOA) 9
bind options
 connection_timeout 8
 defer_bind 8
 enable_rebind 8
 max_bind_retries 8

receive_timeout 8
send_timeout 8
Binding 132
 class 132
binding clients to objects 17
Binding structure 132
BindingIterator
 class 132
 methods 133
BindingList
 class 132
BindingList sequence 132
BindInterceptor 241
BindInterceptorManager
 class 242
BindOptions 7
 struct 7
BOA 9
 include file 117, 119, 122
 methods 9
 VisiBroker extensions 13
brackets 2

C

C++ language exceptions 62
ChainUntypedObjectWrapperFactory 252
 class 252
class
 -_POA_ 6
 -_tie_ 6
 -_var 6
 ActiveObjectLifeCycleInterceptor 246
 ActiveObjectLifeCycleInterceptorManager 247
 agent 273
 AliasDef 81
 Any 49, 65
 ArrayDef 81
 AttributeDef 82
 AttributeDescription 83
 AttributeMode 83
 BindingBindingList 132
 BindingIterator 132
 BindingList 132
 BindInterceptor 241
 BindInterceptorManager 242
 BOA 9
 ChainUntypedObjectWrapperFactory 25
 2
 ClientInterceptor 243
 ClientRequestInterceptorManager 244
 ClientRequestInfo 210
 ClientRequestInterceptor 212
 Codec 214
 CodecFactory 216
 CompletionStatus 14
 ConstantDef 83
 ConstantDescription 84
 Contained 85, 87, 101, 102
 Container 87, 101
 Context 14

ContextList 51
CORBA::Object 256
CORBA::PolicyCurrent 256
CORBA::PolicyManager 255
Current 217
DuplicateName 225
DynamicImplementation 53
DynAny 53
DynAnyFactory 57
DynArray 57
DynEnum 58
DynSequence 59
DynStruct 60
DynUnion 61
EnumDef 93
Environment 62
Exception 17, 45, 47
ExceptionDef 94
ExceptionList 63, 218
ExtendedNamingContextFactory 135
Fail 278
FixedDef 95
FormatMismatch 215
ForwardRequest 219
IDLType 98, 101
Interceptor 219
InterceptorManager 240
InterceptorManagerControl 240
interface_name 5
InterfaceDef 98
InvalidName 225
InvalidTypeForEncoding 215
IORCreationInterceptor 249
IORInfo 220
IORInfoExt 222
IORInterceptor 222
IRObject 101
MarshallInBuffer 265, 269
MarshalOutBuffer 265, 269
Messaging::RebindPolicy 258
ModuleDef 102
ModuleDescription 102
NamedValue 65
NamingContext 125
NamingContextExt 130
NamingContextFactory 133
NativeDef 102
NVList 14, 65, 66
Object 17
ObjectStatus 122
ObjectStatusList 122
ObjectWrapper 5
OperationDef 102
ORB 22
ORBInitializer 224
ORBInitInfo 225
ParameterList 228
POA 29
POALifeCycleInterceptor 245
POALifeCycleInterceptorManager 246
PolicyFactory 228
PrimitiveDef 106
QoSExt::DeferBindPolicy 259
Repository 107
Request 69, 72, 76
RequestInfo 229
RTCORBA::Current 286
RTCORBA::Mutex 287
RTCORBA::NativePriority 288
RTCORBA::Priority 289
RTCORBA::PriorityMapping 289
RTCORBA::PriorityModel 291
RTCORBA::PriorityModelPolicy 292
RTCORBA::RTORB 292
RTCORBA::ThreadpoolId 295
RTCORBA::ThreadpoolPolicy 296
Seq 280
SeqSeq 281
SequenceDef 109
ServantActivator 42
ServantLocator 44
ServantManager 45
ServerRequestInfo 232
ServerRequestInterceptor 235, 248
ServerRequestInterceptorManager 249
StringDef 109, 112
StructDef 110
SystemException 45, 47
TriggerHandler 279
TypedefDef 111
TypeMismatch 215
UnionDef 112
UnknownEncoding 216
UntypedObjectWrapper 253
ValueBoxDef 113
ValueDef 113
VISClientInterceptor 245, 246, 247, 248, 249, 250
VISClosure 251
VISClosureData 252
VISInit 283
WStringDef 116
classes 209
ClientInterceptor 243
ClientRequestInfo
 BAD_INV_ORDER 211
 BAD_PARAM 211
 class 210
 exceptions 211
 INV_POLICY 211
 methods 211
ClientRequestInterceptor
 class 212
 exceptions 213
 ForwardRequest 213
 methods 213
ClientRequestInterceptorManager
 class 244
Codec
 class 214
 exceptions 215
 FormatMismatch 215
 InvalidTypeForEncoding 215
 members 215

- methods 215
- Codec encoding
 - struct 218
- CodecFactory
 - class 216
 - exceptions 216
 - UnknownEncoding 216
- commands
 - conventions 2
- COMPLETED_MAYBE 14
- COMPLETED_NO 14
- COMPLETED_YES 14
- CompletionStatus 14
- ConstantDef 83
 - class 83
- ConstantDescription
 - class 84
- ConsumerAdmin
 - interface 137
 - method 137
- Contained 85, 101, 102
 - methods 85
- Container 87, 101
 - methods 88
- containment hierarchy 87
- Context 14
 - class 14
 - include file 14
 - methods 14
- Context_var class 14
- ContextList
 - class 51
- CORBA
 - BOA
 - methods 9

- Current
 - class 16, 217
 - methods 17, 217
- Current methods
 - BAD_INV_ORDER 217
 - exceptions 217
 - InvalidSlot 217

D

- deactivating
 - object implementations 9
- DeferBindPolicy
 - class 259
- defining
 - an ORB object's interface 98
- DefinitionKind 92
 - enum 92
- delegation implementations 6
- deriving
 - Interface Repository objects 85
- Desc
 - structure 277
- documentation
 - .pdf format 3
 - accessing Help Topics 1

- platform conventions used in 2
- type conventions used in 2
- updates on the web 3
- DuplicateName
 - class 225
- ORBInitInfo 225
- dynamic interfaces 49
- DynamicImplementation 53
 - class 53
 - methods 53
- DynAny 53
 - class 53
 - methods 54
 - usage restrictions 54
- DynAnyFactory
 - class 57
- DynArray 57
 - class 57
 - methods 57
 - usage restrictions 57
- DynEnum 58
 - class 58
 - methods 58
 - usage restrictions 58, 61
- DynSequence 59
 - class 59
 - methods 59
 - usage restrictions 59
- DynStruct 60
 - class 60
 - methods 60
 - usage restrictions 60
- DynUnion 61
 - class 61
 - methods 61

E

- encoding
 - members 218
 - struct 218
 - supported 218
- enum
 - DefinitionKind 92
 - OperationMode 105
 - ParameterMode 106
 - PrimitiveKind 106
- EnumDef 93
 - class 93
- enumeration
 - AttributeMode 83
 - DefinitionKind 92
 - OperationMode 105
 - ParameterMode 106
 - PrimitiveKind 106
 - TCKind 75
- Environment 62
 - methods 63
- event handlers
 - interfaces 125, 137
- EventChannel
 - interface 137

methods 138
EventChannelFactory
interface 138
methods 139
Exception 45, 47
class 17
ExceptionDef 94
ExceptionDescription 94
structure 94
ExceptionList
class 63, 218
exceptions
BAD_INV_ORDER 233
BAD_PARAM 229
CodecFactory 216
DuplicateName 225
FormatMismatch 215
ForwardRequest 219, 235
INV_POLICY 233
InvalidName 225
InvalidSlot 229, 233
InvalidTypeForEncoding 215
IORInfo 220
NO_RESOURCES 235
ORBInitInfo 225
TypeMismatch 215
UNKNOWN 233
extended methods
BOA 13
ExtendedNamingContextFactory
class 135
methods 135

F

Fail class 278
FixedDef
class 95
FormatMismatch
class 215
Codec 215
ForwardRequest
class 219
ClientRequestInterceptor 213
exceptions 219
FullInterfaceDescription 96
structure 96
FullValueDescription
structure 97

G

generated classes 5
sk 6
st 5
tie 6
_var 6
GLOBAL_SCOPE 9

H

Help Topics
accessing 1

I

IDL
OAD 118
IDLType 98, 101
include file 98
methods 98
IIOP structure
ProfileBody 263
ImplementationStatus struct 117
include file
BOA 117, 119, 122
Context 14
IDLType 98
interception points
receive_exception 213
receive_other 213
receive_reply 213
receive_request 235
receive_request_service_contexts 235
send_exception 235
send_other 235
send_poll 213
send_reply 235
send_request 213
Interceptor
class 219
methods 219
interceptor_c.hh 249
InterceptorManager
class 240
InterceptorManagerControl
class 240
interceptors
client request 212
IOR 222
server request 235
Interface Repository
classes 81
interface_name class 5
InterfaceDef 98
methods 99
InterfaceDescription
structure 100
interfaces
ConsumerAdmin 137
EventChannel 137
EventChannelFactory 138
OAD 118
ProxyPullConsumer 139
ProxyPullSupplier 140
ProxyPushConsumer 140
ProxyPushSupplier 140
PullConsumer 141
PullSupplier 142
PushConsumer 141
PushSupplier 142
SupplierAdmin 143
Interoperable Object Reference (see IOR) 264
INV_POLICY
ClientRequestInfo 211

IORInfo 220
InvalidName
 class 225
 ORBInitInfo 225
InvalidSlot
 Current methods 217
InvalidTypeForEncoding
 class 215
 Codec 215
IOP structure::TaggedProfile 264
IOR 264
IORCreationInterceptor
 class 249
IORInfo
 BAD_PARAM 220
 class 220, 222
 exceptions 220
 INV_POLICY 220
 methods 220
 validity 220
IORInfo class 220
IORInfoExt
 class 222
 methods 222
IORInterceptor
 class 222
 methods 223
IROObject (Interface Repository
 object) 101
IROObject (Interface Repository objects)
 methods 101

L

LOCAL_SCOPE 9
Location Service
 agent 273
 Fail 278
 Seq 280
 SeqSeq 281
 TriggerDesc 279
 TriggerHandle 279

M

manipulating object references 17
MarshallInBuffer
 class 265, 269
 methods 265, 268
MarshalOutBuffer
 methods 269, 272
members
 argument in Parameter 228
 format in encoding 218
 major_version in encoding 218
 minor_version in encoding 218
 mode in Parameter 228
memory management semantics 14
methods
 adapter_id in ServerRequestInfo 233
 adapter_manager_state_changed in
 IORInterceptor 223

adapter_name in
 ServerRequestInfo 233
adapter_state_changed in
 IORInterceptor 223
adapter_template in IORInfo 220
add_client_request_interceptor in
 ORBInitInfo 225
add_ior_component in IORInfo 220
add_ior_component_to_profile in
 IORInfo 220
add_ior_interceptor in ORBInitInfo 225
add_reply_service_context in
 ServerRequestInfo 233
add_request_service_context in
 ClientRequestInfo 211
add_server_request_interceptor in
 IORInfoExt 222
add_servert_request_interceptor in
 ORBInitInfo 225
allocate_slot_id in ORBInitInfo 225
arguments in ORBInitInfo 225
arguments in RequestInfo 229
bind in NamingContext 126
bind_context in NamingContext 126
bind_new_context in
 NamingContext 126
BOA 9
change_implementation in OAD 119
codec_factory in ORBInitInfo 225
components_established in
 IORInterceptor 223
connect_push_supplier in
 ProxyPushConsumer 140
Contained 85
Container 88
Context 14
contexts in RequestInfo 229
create in EventChannelFactory 139
create_by_name in
 EventChannelFactory 139
create_codec in CodecFactory 216
create_policy in PolicyFactory 229
create_struct in Container 88
current_factory in IORInfo 220
decode in Codec 215
decode_value in Codec 215
destroy in EventChannel 138
destroy in EventChannelFactory 139
destroy in Interceptor 219
destroy in NamingContext 126
destroy_on_unregister in OAD 119
disconnect_pull_supplier 142
disconnect_push_consumer in
 PullConsumer 141
disconnect_push_supplier in
 PushSupplier 142
effective_profile in
 ClientRequestInfo 211
effective_target in
 ClientRequestInfo 211
encode in Codec 215
encode_value in Codec 215

establish_components in
 IORInterceptor 223
exceptions in RequestInfo 229
extraction methods in Any 55
for_suppliers in EventChannel 138
forward_reference in RequestInfo 229
full_poa_name in IORInfoExt 222
get_cluster_manager in
 NamingContextFactory 134
get_effective_component in
 ClientRequestInfo 211
get_effective_components in
 ClientRequestInfo 211
get_effective_policy in IORInfo 220
get_implementation in OAD 119
get_reply_service_context in
 RequestInfo 229
get_request_policy in
 ClientRequestInfo 211
get_request_service_context in
 RequestInfo 229
get_server_policy in
 ServerRequestInfo 233
get_slot in Current 217
get_status in OAD 119
get_status_all in OAD 119
get_status_interface in OAD 119
getslot in RequestInfo 229
IDLType 98
insertion methods in Any 56
InterfaceDef 99
IROObject 101
list_all_roots in
 NamingContextFactory 134
lookup_by_name in
 EventChannelFactory 139
lookup_id in Repository 108
manager_id in IORInfo 220
name in Interceptor 219
NamedValue 65
new_context in NamingContext 126
NVList 66
object_id in ServerRequestInfo 233
obtain_pull_consumer in
 SupplierAdmin 143
obtain_pull_supplier 137
obtain_push_consumer in
 SupplierAdmin 143
obtain_push_supplier 137
operation in RequestInfo 229
operation_context in RequestInfo 229
OperationDef 103
ORB 22
orb_id in ORBInitInfo 225
orb_id in ServerRequestInfo 233
POA 29
POAManager 39
post_init in ORBInitializer 224
pre_init in ORBInitializer 224
Principal 41
pull in PullSupplier 142
rebind in NamingContext 126
rebind_context in NamingContext 126
receive_exception in
 ClientRequestInterceptor 213
receive_other in
 ClientRequestInterceptor 213
receive_reply in
 ClientRequestInterceptor 213
receive_request in
 ServerRequestInterceptor 235
receive_request_service_contexts in
 ServerRequestInterceptor 235
received_exception in
 ClientRequestInfo 211
received_exception_id in
 ClientRequestInfo 211
reg_implementation in OAD 119
register_initial_reference in
 ORBInitInfo 225
register_policy_factory in
 ORBInitInfo 225
remove_state_contexts in
 NamingContextFactory 134
reply_status in RequestInfo 229
Repository 108
Request 69
request_id in RequestInfo 229
resolve in NamingContext 126
resolve_initial_references in
 ORBInitInfo 225
response_expected in RequestInfo 229
result in RequestInfo 229
root_context in
 ExtendedNamingContextFactory 135
send_exception in
 ServerRequestInterceptor 235
send_other in
 ServerRequestInterceptor 235
send_poll in
 ClientRequestInterceptor 213
send_reply in
 ServerRequestInterceptor 235
send_request in
 ClientRequestInterceptor 213
sending_exception in
 ServerRequestInfo 233
ServantActivator 42
ServantBase 43
ServantLocator 44
server_id in ServerRequestInfo 233
ServerRequest 73
set_slot in Current 217
set_slot in ServerRequestInfo 233
state in IORInfo 220
sync_scopoe in RequestInfo 229
SystemException 46, 48
target in ClientRequestInfo 211
target_is_a in ServerRequestInfo 233
target_most_derived_interface in
 ServerRequestInfo 233
try_pull in PullSupplier 142
unbind in NamingContext 126
unreg_implementation in OAD 119

unreg_interface in OAD 119
unregister_all in OAD 119
ModuleDef 102
 class 102
ModuleDescription 102
 structure 102
multi-threaded applications 62

N

NamedValue 65, 66
 methods 65
NamingContext
 class 125
 methods 126
NamingContextExt
 class 130
 methods 130
NamingContextFactory
 class 133
 methods 134
Native Messaging C++
 DuplicatedRequestTag class 207
 PollingGroupIsEmpty class 207
 property struct 205
native messaging C++
 RequestAgent class 201
Native Messaging for C++
 interfaces and classes 201
 OctetSeq class 206
 Property fields 205
 Property IDL definition 205
 PropertySeq class 206
 REPLY_NOT_AVAILABLE constant 205
 REPLY_NOT_AVAILABLE IDL
 definition 205
 ReplyRecipient class 204
 ReplyRecipient methods 204
 RequestAgent IDL definition 201
 RequestAgent methods 202
 RequestDesc fields 203
 RequestDesc IDL definition 203
 RequestDesc struct 203
 RequestNotExist class 207
 RequestTag typedef 206
 RequestTagSeq class 206
 typedef Cookie 207
NativeDef
 class 102
NVList 65, 66
 methods 66

O

OAD
 IDL 118
OAD interface 118
Object 17
 class with QoS 256
 methods 18
 VisiBroker extensions 20
Object Activation Daemon
 OAD interface 118

Object Request Broker. See ORB 22
ObjectStatus 122
ObjectStatusList
 class 122
online Help Topics
 accessing 1
OP_NORMAL 105
OP_ONEWAY 105
OperationDef 102
 methods 103
OperationDescription
 structure 104
OperationMode 105
 enum 105
 NORMAL 105
 ONEWAY 105
ORB 22
 class 22
 extensions to CORBA 28
 methods 22
ORBInitializer
 class 224
 methods 224
ORBInitInfo
 BAD_INV_ORDER 225
 class 225
 DuplicateName 225
 exceptions 225
 InvalidName 225
 members 225
 methods 225

P

Parameter
 struct 228
Parameter struct 228
ParameterDescription 105
 structure 105
ParameterList
 class 228
ParameterMode 106
 enum 106
PDF documentation 3
PICurrent
 see also Current 217
Pluggable Transport Interface Classes 297
POA
 adapter activators 7
 class 29
 core classes 7
 core interfaces 7
 creating child POAs 7
 methods 29
POALifeCycleInterceptor
 class 245
POALifeCycleInterceptorManager
 class 246
POAManager 38
 methods 39
PolicyCurrent
 class 256

P
 PolicyFactory
 class 228
 PolicyManager
 class 255
 Portable Interceptors
 interfaces 209
 portable interceptors
 ClientRequestInfo 210
 POA scoped server request
 interceptor 222
 PortableServer
 AdapterActivator 7
 PortableServer_c.hh 247
 PortableServer::Current 16
 methods 17
 PortableServerExt_c.hh 246, 250
 PortalServerExt_c.hh 246
 PrimitiveDef 106
 class 106
 PrimitiveKind 106
 enum 106
 Principal 41
 methods 41
 ProfileBody 263
 programming interface
 agent 273
 AliasDef 81
 Any 49, 65
 ArrayDef 81
 AttributeDef 82
 BindInterceptor 241
 BindOptions 7
 BOA 9
 ChainUntypedObjectWrapperFactory 25
 2
 ClientInterceptor 243
 CompletionStatus 14
 ConstantDef 83
 Contained 85, 101, 102
 Container 87, 101
 Context 14
 DynamicImplementation 53
 DynAny 53
 DynArray 57
 DynEnum 58
 DynSequence 59
 DynStruct 60
 DynUnion 61
 EnumDef 93
 Environment 62
 Exception 17, 45, 47
 ExceptionDef 94
 Fail 278
 IDLType 98, 101
 InterfaceDef 98
 IROObject 101
 MarshalInBuffer 269
 MarshalOutBuffer 265, 269
 ModuleDef 102
 ModuleDescription 102
 NamedValue 65
 NVList 65, 66
 Object 17
 OperationDef 102
 ORB 22
 PrimitiveDef 106
 Principal 41
 Repository 107
 Request 69, 72, 76
 Seq 280
 SeqSeq 281
 SequenceDef 109
 StringDef 109
 StructDef 110
 SystemException 45, 47
 TriggerHandler 279
 TypedefDef 111
 UnionDef 112
 UntypedObjectWrapper 253
 VISClientInterceptor 245, 246, 247, 248,
 249, 250
 VISInit 283
 WstringDef 116
 ProxyPullConsumer
 interface 139
 ProxyPullSupplier
 interface 140
 ProxyPushConsumer
 interface 140
 ProxyPushSupplier
 interface 140
 PullConsumer
 interface 141
 PullSupplier
 interface 142
 methods 142
 PushConsumer
 interface 141
 PushSupplier
 interface 142

Q

QoS
 Quality of Service 255
 Quality of Service
 QoS 255
 querying
 an object's state 17

R

Real-Time CORBA interfaces and
 classes 285
 RebindPolicy
 class 258
 RefCountServantBase
 methods 41
 reporting
 standard system errors 45
 system exceptions 62
 user exceptions 62
 Repository 107
 methods 108

Request 69, 72, 76
 methods 69
request interceptors
 client 212
 server 235
RequestInfo
 class 229
 methods 229
returning
 an object's Typecode 98
RTCORBA::Current 286
RTCORBA::Mutex 287
RTCORBA::NativePriority 288
RTCORBA::Priority 289
RTCORBA::PriorityMapping 289
RTCORBA::PriorityModel 291
RTCORBA::PriorityModelPolicy 292
RTCORBA::RTORB 292
RTCORBA::ThreadpoolId 295
RTCORBA::ThreadpoolPolicy 296

S

Seq
 methods 280
SeqSeq
 methods 281
SequenceDef 109
 class 109
ServantActivator
 class 42
 methods 42
ServantBase
 methods 43
ServantLocator
 class 44
 methods 44
ServantManager
 class 45
Server Manager
 container interface 145
 container methods for C++ 145
 storage interface 149
ServerRequest
 methods 73
ServerRequestInfo
 BAD_INV_ORDER 232
 class 232
 exceptions 232
 methods 233
ServerRequestInterceptor
 class 235, 248
 methods 235
ServerRequestInterceptorManager
 class 249
setting
 an object's state 17
skeletons 6
square brackets 2
StringDef 109
 class 109, 112
struct

Codec encoding 218
Parameter 228
UnionMember 112
struct BindOptions 7
struct Parameter 228
StructDef 110
 class 110
StructMember
 structure 111
structure
 AttributeDescription 83
 BindOptions 7
 Desc 277
 ExceptionDescription 94
 FullInterfaceDescription 96
 FullValueDescription 97
 InterfaceDescription 100
 IOR 264
 ModuleDescription 102
 OperationDescription 104
 ParameterDescription 105
 StructMember 111
 TriggerDesc 279
 TypeDescription 111
 UnionMember 112
 ValueDescription 115
 VersionSpec 112
structure ExceptionDescription 94
structure ParameterDescription 105
stubs 5
SupplierAdmin
 interface 143
symbols
 ellipsis ... 2
 vertical bar | 2
system exception classes 17
SystemException 45, 47
 class 45
 defined 46, 48
 methods 46, 48

T

TaggedProfile 264
TCKind 75
 descriptions 75
TPool 13
TriggerDesc 279
TriggerHandler
 methods 280
TriggerHandler class 279
TSession 13
TypeCode
 constructors 76
 methods 76
TypedefDef 111
 class 111
TypeDescription 111
TypeMismatch
 class 215

U

UnionDef 112
UnionMember 112
 structure 112
UnknownEncoding
 class 216
 CodecFactory 216
UntypedObjectWrapper 253
 class 253
user exception classes 17

V

ValueBoxDef
 class 113
ValueDef
 class 113
ValueDescription
 structure 115
Var classes 6
VersionSpec 112
vinit.h 283, 309
VISClientInterceptor 245, 246, 247, 248, 249,
 250
VISClosure
 class 251
VISClosureData
 class 252
VISDAppender 312
VISDAppenderFactory 311
VISDConfig 314
VISDLayout 313
VISDLayoutFactory 313
VISDLogger 311
VISDLoggerMgr 309
VISDLogLevel 316
VISDLogRecord 315
VisiBroker interceptors
 interceptor managers 239
 InterceptorManager class 240
 IOR templates 240
VISInit 283
 methods 283, 284
VISPTransBridge 306
VISPTransConnection 297
VISPTransConnectionFactory 300
VISPTransListener 301
VISPTransListenerFactory 302
VISPTransProfileBase 303
VISPTransProfileFactory 305
VISPTransRegistrar 306
vobjwrap.h 252

W

WstringDef 116
 class 116